


9002/22-240-024-001 Art. No. 158950



- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, zero-potential contacts and many more
- Compact, space-saving devices that are easy to install on a DIN rail
- Quick and efficient installation as barriers can be simultaneously snapped onto DIN rail and connected to ground (ISA - RPI12.06)

MY R. STAHL 9002A

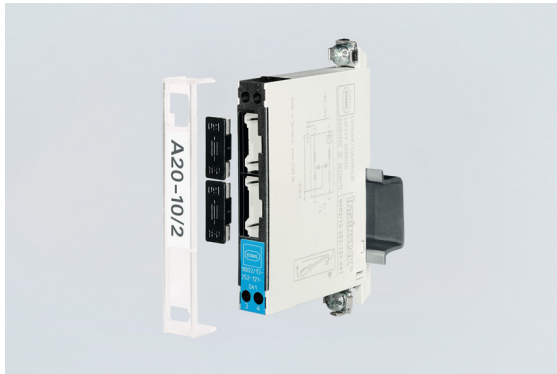

The 9002 series INTRINSPAK two-channel zener barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of zener barriers cover a wide variety of signals. The devices are incredibly robust and require very little space. The back-up fuse is a convenient feature as it is standardized for all variants.

Technical Data

Explosion Protection	
Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEX gas certificate	IECEX PTB 08.0057X
IECEX gas explosion protection	Ex ec [ia Ga] IIC T4 Gc
IECEX dust certificate	IECEX PTB 08.0057X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	PTB 01 ATEX 2053 X
ATEX gas explosion protection	II 3 (1) G Ex ec [ia Ga] IIC T4 Gc
ATEX dust certificate	PTB 01 ATEX 2053 X
ATEX dust explosion protection	II (1) D [Ex ia Da] IIIC
FMus certificate	3010778
Marking FMus	NONINCENDIVE FOR, Class I, Div. 2, Groups A,B,C,D; T4; Class I, Zone 2, Group IIC T4 IS connections for Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, Groups IIC/IIB Hazardous location when inst. per doc. 90 026 11 31 1
Certificate ULus	E81680V1S3
Marking ULus	For use in Hazardous location, Class I, Div. 2, Groups A,B,C,D; T4 Providing IS circuits for Class I,II,III, GROUPS A,B,C,D,E,F,G; per doc. 90 026 11 31 3
cCSA certificate	1284580
Marking cCSA	Associated equipment [Ex ia], Class I, Div. 2, Groups A,B,C,D; Provides IS circuits for Class I,II,III, Class I, Zone 0, Groups IIC/IIB For applicable grps per inst. doc. 90 016 11 31 2
Inmetro gas certificate	UL-BR 12.0354
Inmetro dust certificate	UL-BR 12.0354

9002/22-240-024-001 Art. No. 158950

Explosion Protection

Certificates	ATEX (PTB), Brazil (ULB), Canada (FM), China (CQST), IECEx (PTB), India (PESO), Japan (CML), Korea (KGS), USA (FM), USA (UL)
Declaration of conformity	ATEX (EUK)
Installation	in Zone 2, Division 2 and in safe area
Further information	see respective certificate and operating instructions

Safety Data

Max. voltage U_o/V_{oc}			12 V		
Max. current I_o/I_{sc}			12 mA		
Max. power P_o			40 mW		
Max. permissible external capacitance C_o/C_a for IIC			1.41 μ F		
Max. permissible external inductance L_o/L_a for IIC			240 mH		
Max. permissible external capacitance C_o/C_a for IIB			9 μ F		
Max. permissible external inductance L_o/L_a for IIB			850 mH		
Intrinsically safe limiting values Inductance L_o /capacitance C_o			Jointly connectable inductance L_o /capacitance C_o		
Channel 1	IIC	L_o [mH]	50 mH	1 mH	0.100 mH
		C_o [μ F]	0.340 μ F	0.6300 μ F	1.1000 μ F
	IIB	L_o [mH]	50 mH	1 mH	0.1 mH
		C_o [μ F]	1.80 μ F	3.50 μ F	6.60 μ F
Channel 2	IIC	L_o [mH]	50 mH	1 mH	0.1 mH
		C_o [μ F]	0.340 μ F	0.630 μ F	1.100 μ F
	IIB	L_o [mH]	50 mH	1 mH	0.1 mH
		C_o [μ F]	1.80 μ F	3.50 μ F	6.60 μ F
Channels 1 + 2	IIC	L_o [mH]	50 mH	1 mH	0.10 mH
		C_o [μ F]	0.260 μ F	0.620 μ F	1.100 μ F
	IIB	L_o [mH]	50 mH	1 mH	0.1 mH
		C_o [μ F]	1.600 μ F	3.40 μ F	6.600 μ F

Electrical Data

Number of channels			2				
Maximum resistance R _{max}			1164 Ω				
Min. resistance R _{min}			1051 Ω				
Maximum output current I _{max}			7.7 mA				
Potential channel 1			Alternative				
Potential channel 2			Alternative				
Transmission frequency channel 1			≤ 50 kHz				
Type of voltage			AC/DC				
I _{leak} leakage current for U _n			≤ 2 μA				
Chan- nel	V _{nom}	I _{max}	R _{min}	R _{max}	U _o /V _{oc}	I _o /I _{sc}	P _o
1	9.00 V AC+DC	7.7 mA	1051 Ω	1164 Ω	12 V	12 mA	40 mW
2	9 V	7.7 mA	1051 Ω	1164 Ω	12 V	12 mA	40 mW

Zener Barriers


Two-channel safety barrier

STAHL

9002/22-240-024-001 Art. No. 158950

1 + 2	18 V				24 V	24 mA	80 mW
Auxiliary Power							
Power supply		Controlled					
Output							
Temperature influence		≤ 0,25 %/10K					
Ambient Conditions							
Ambient temperature °C		-20 °C ... 60 °C					
Ambient temperature °F		-4°F ... +140°F					
Storage temperature °C		-20 °C ... 75 °C					
Storage temperature °F		-4°F ... +167°F					
Max. relative humidity		95% average, no condensation					
Mechanical Data							
Degree of protection (IP)		IP40					
Degree of protection (IP) terminals		IP20					
Enclosure material		Polyamide 6GF					
Number of connection terminals		4					
Connection cross-section max.		1.5 mm²					
Connection cross-section AWG		16 AWG					
Type of connection cable		Solid Finely stranded					
Width		103 mm					
Width, inches		4.09 in					
Length		12 mm					
Length in inches		0.48 in					
Mounting depth		72 mm					
Mounting depth in inches		2.76 in					
Weight		110 g					
Weight		0.24 lb					
Mounting / Installation							
Earthing connection cross-section		4 mm²					
Earthing conductor cross-section AWG		12 AWG					
Connection type		2 PA					
Min. torque, Nm		0.5 N · m					
Min. torque, lb/in		4.43 lb/in					
Max. torque, Nm		0.6 N · m					
Max. torque, lb/in		5.31 lb/in					

Technical Drawings – Subject to Alterations

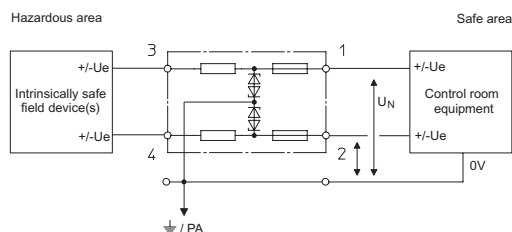



Zener Barriers

Two-channel safety barrier




9002/22-240-024-001 Art. No. 158950


Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



Mounting on DIN rail NS 35/15







Mounting on DIN rail NS 32 by means of adaptor and mounting attachment, moulded plastic



Mounting on mounting plate by means of adaptor

Accessories

Terminal block		Art. No.
	Phoenix Contact terminal block UT 4-PE	113057
	Phoenix Contact terminal block UT 6-PE	113058
Adaptor		Art. No.
	The adaptor enables a zener barrier to be installed on a clamping base (Art. No. 165283) or mounting plate from a previous series.	158826
Clamping base, moulded material		Art. No.
	Enables mounting of zener barrier on a G-rail. The safety barrier is mounted using the adaptor (Art. No. 158826).	165283
Fuse holder		Art. No.
	Fuse holder is snapped onto the side of the zener barrier and can be equipped with up to 5 back-up fuses (replacement).	158834

Spare Parts


Back-up fuse	Art. No.
--------------	----------

Zener Barriers

Two-channel safety barrier



9002/22-240-024-001 Art. No. 158950

	For all zener barriers Series 9001, 9002 and 9004 unit: 5 pcs.	158964
Label carrier		Art. No.
	Transparent cover for the label	158977

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.