



Operating Instructions



Push button VB-PB-*



THE STRONGEST LINK.

Operating Instructions version:
Issue date:

01.00.01
09.12.2024

Disclaimer

Publisher and copyright holder:

R. STAHL HMI Systems GmbH
Adolf-Grimme-Allee 8
D 50829 Cologne

Telephone:	(Sales Support)	+49 221 768 06	- 1200
	(Technical Support)		- 5000
Fax:			- 4200
E-mail:	(Sales Support)	sales.dehm@r-stahl.com	
	(Technical Support)	support.dehm@r-stahl.com	

- All rights reserved.
- This document may not be reproduced in whole or in part except with the written consent of the publisher.
- The information in this document is subject to change without notice.

Any warranty claims are limited to the right to demand amendments. Liability for any damage that might result from the contents of these instructions or all other documentation is limited to clear cases of premeditation.

We reserve the right to amend our products and their specifications at any time, provided it is in the interest of technical progress. The information in the current manual (online or on CD / DVD / USB stick) or in the Operating Instructions included in the delivery applies.

Trademark

The terms and names used in this document are registered trademarks and / or products of the companies in question.

Copyright © 2024 by R. STAHL HMI Systems GmbH. Subject to alterations.

Specific markings

The markings in these Operating Instructions refer to specific features that must be noted.

In detail, these are:







 DANGER	This sign alerts users to hazards that will result in death or serious injury if ignored.
 WARNING	This sign alerts users to hazards that may result in death or serious injury if ignored.
 CAUTION	This sign alerts users to hazards that may damage machinery or equipment or result in injury if ignored.
 ATTENTION	Information highlighted by this symbol indicates measures for the prevention of damage to machinery or equipment.
 NOTICE	Information highlighted by this symbol indicates important information of which particular note should be taken.
 DOCUMENTATION	Information highlighted by this symbol (with and without lettering) refers to a different chapter or section in this manual or other documentation or a web-page.


Table of contents

	Description	Page
	Disclaimer	2
	Specific markings	3
	Table of contents	4
1	Preface	6
2	Intended use	6
3	Technical data	6
4	Applied Standards	7
5	Certificates	7
5.1	Approvals	7
	Europe (CE / ATEX)	7
	Global (IECEX)	7
6	Marking	8
6.1	Type code	8
6.2	Ex classification ATEX / IECEX	8
6.2.1	The following applies to version VB-PB-22mm-Z1-*:	8
6.2.2	The following applies to version VB-PB-22mm-Z2-*:	8
6.3	Notified Body ID number	8
6.4	Temperature Range	8
6.5	Ingress protection	8
6.6	Warnings	8
6.7	Serial number, date of manufacture, manufacturer	8
7	Electrical parameters	9
8	Safety information	9
8.1	Commissioning	9
8.2	Use	9
8.3	Installation	9
8.3.1	Views	10
8.3.2	Dimensions	10
8.3.2.1	Dimensional drawing	10
8.4	Maintenance, overhaul and repair	10
8.5	Adjustment	11
9	Training instructions	11
10	Special conditions of use	11
11	Special tools	11
12	Cells and Batteries	11
13	Disposal / restricted substances	11
13.1	RoHS directive 2011/65/EU	11
14	Installation drawing	12
15	EU Declaration of conformity	13
17	Certificates	14
17.1	ATEX certification	14
17.1.1	Version VB-PB-22mm-Z1-*	14
17.1.2	Version VB-PB-22mm-Z2-*	16
17.2	IECEX certification	18

18	Release notes	22
-----------	----------------------	-----------

1 Preface

These Operating Instructions contain all aspects relevant to explosion protection for the VB-PB-* series push buttons. They also contain information on the connection and installation (etc.) of these devices.

 NOTICE	All data relevant to explosion protection was copied to these Operating Instructions from the EC type examination certificate.
	For the correct operation of all associated components please note, in addition to these Operating Instructions, all other Operating Instructions enclosed in this delivery as well as the Operating Instructions of the additional equipment to be connected.

2 Intended use

The VB-PB-* push buttons are explosion-protected equipment for installation in hazardous areas and can be installed in zones 1, 2, 21 and 22 (EPL Gb, Db) or Zones 2 and 22 (EPL Gc, Dc) according to the ATEX directive.

The VB-PB-* are used to switch signals in intrinsically safe circuits and can be installed in the connection covers of the xx8 devices or inside a separate enclosure with degree of protection Ex e, Ex i, Ex p or Ex t.

3 Technical data


Function / Equipment	VB-PB-22mm-Z1/Z2-0.2m
Type	Safety push button
Operating sequence	NO
Switching voltage	max. 30 VDC
Switching current	max. 200 mA
Switch rating	max. 1.1 W
Switching travel	0.7 mm / [0.0023 ft]
Actuating force	7 N
Cable length	0.2 m / [0.656]
Enclosure protection type	IP66
Ambient temperature range	-40 °C ... +115 °C / [-40 °F ... +239 °F]
Mounting position	any
Dimensions [mm] / [ft]	without single core
Diameter	22 / [0.072]
Front (Ø x H)	22 x 23.6 / [0.072 x 0.077]
Mounting hole Ø (+0.2 / -0.0) / [+0.000656 / -0.0]	19 / [0.062]
Depth of cut-out	21.6 / [0.071]
Wall thickness	1 – 7 / [0.0033 - 0.023]
Weight [kg] / [oz.]	0.1 / [3.53]

4 Applied Standards

The VB-PB-* push buttons comply with the following standards and directive:

Standard	Classification
ATEX directive 2014/34/EU	
IEC 60079-0 : 2017	General requirements
IEC 60079-11 : 2011	Protection by intrinsic safety "i"
The product corresponds to requirements from:	
EN 60079-0 : 2012 + A11 : 2013	General requirements
EN IEC 60079-0 : 2018	
RoHS directive	
2011/65/EU	Classification
EN IEC 63000 : 2018	Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances

5 Certificates

	Certificates: r-stahl.com
	The device has IECEx approval. See IECEx homepage: https://www.iecex-certs.com/#/home .

5.1 Approvals

The VB-PB-* push-buttons are approved for the following areas:

Synonym	Scope of validity	Valid until	Version	Certificate number	Note
CE	Europe	unlimited			according to directive 2014/34/EU 2011/65/EU
ATEX	Europe	unlimited	VB-PB-22mm-Z1-*	BVS 18 ATEX E 031 U	Issue 00
			VB-PB-22mm-Z2-*	BVS 18 ATEX E 034 U	
IECEX	Global	unlimited		IECEX BVS 18.0026U	Issue: 0

6 Marking

6.1 Type code

VB-PB-22mm-Z1/Z2*

* any alphanumeric or symbolic characters, without relevance for explosion protection





Options

Breakdown of version type codes	Description
	Version with
VB-PB-22mm-Z1/Z2-0.2m	Connection cable length 0.2 m / [0.656]



6.2 Ex classification ATEX / IECEx

ATEX and IECEx marking according to IEC 60079-0 and ATEX directive 2014/34/EU.

6.2.1 The following applies to version VB-PB-22mm-Z1-*:

Design	2014/34/EU prefix	Ex marking
Gas	 II 2 G	Ex ia IIC Gb (for ia circuits)
	 II 2 G	Ex ib IIC Gb (for ib circuits)
Dust	 II 2 D	Ex ia IIIC Db (for ia circuits)
	 II 2 D	Ex ib IIIC Db (for ib circuits)

6.2.2 The following applies to version VB-PB-22mm-Z2-*:

Design	2014/34/EU prefix	Ex marking
Gas	 II 3 G	Ex ic IIC Gc (for ic circuits)
Dust	 II 3 D	Ex ic IIIC Dc (for ic circuits)

6.3 Notified Body ID number

Notified Body ID number: 0158

6.4 Temperature Range

Temperature range: -40 °C ... +115 °C / [-40 °F ... +239 °F]

6.5 Ingress protection

Ingress protection: IP66 (IP64 ex-certified)
if installed in connection box of xx8 or inside a separate enclosure with ingress protection Ex e, Ex i, Ex p or Ex t.

6.6 Warnings

not applicable

6.7 Serial number, date of manufacture, manufacturer

The push buttons are marked according to IEC 60079-0 section 29.10. on the front ring of the push button.

Alternatively, marking can be according to IEC 60079-0 section 29.11 on a lable containing the serial number, date of manufacture and the manufacturer.

7 Electrical parameters

The following electric parameters apply:

max. voltage	U_i	=	30	VDC
max. current	I_i	=	200	mA
max power	P_i	=	1.1	W
max. internal capacitance	C_i	=	negligible	
max. internal inductance	L_i	=	negligible	

8 Safety information

8.1 Commissioning

No special conditions.


8.2 Use

See intended use.

8.3 Installation

- The current national regulations for installation and assembly apply (e.g. IEC/EN 60079-14).
- The intrinsically safe circuits must be installed according to applicable regulations.
- The push buttons may be installed and operated in any position.
- The push button must be securely installed according to the installation drawing (10550505 Rev02 VB-PB-22mm Installation) and / or the installation instructions.
- The sealing ring of the push button must not be damaged.
- The bevelled side of the mounting nut must be mounted in the direction of the sealing ring.
- The tightening torque of the mounting nut is 3 Nm.
- The clearances and creepage distances between the bare conducting parts of terminals of separate intrinsically safe circuits and to earthed or potential-free conducting parts shall be equal to or exceed the values given in IEC/EN 60079-11, Table 5.
- The insulation between an intrinsically safe circuit and a non-intrinsically safe circuit shall be capable of withstanding an r.m.s. a.c. test voltage with a minimum of 1500 V r.m.s.. When separation is accomplished by distance then the clearance between bare conducting parts of terminals shall be at least 50 mm / [0.164 ft].
- Where separate intrinsically safe circuits are being considered, the clearance distance between bare conducting parts of external connection facilities shall be at least 6 mm / [0.0197 ft] between the separate intrinsically safe circuits.
- For Da, Db, Dc application of the VB-PB-22mm-Z1/Z2-*, the requirements according to clause 5.6.5 of IEC 60079-11 have to be regarded.


8.3.1 Views

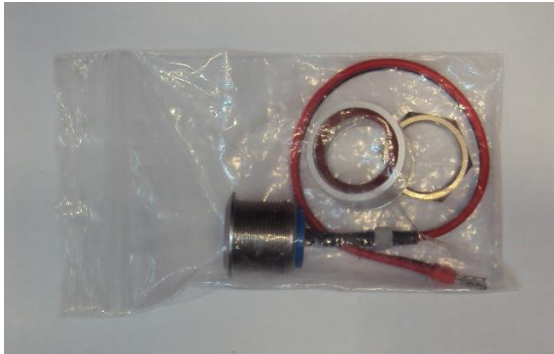

8.3.2 Dimensions

Dimensions in mm / [ft].

8.3.2.1 Dimensional drawing

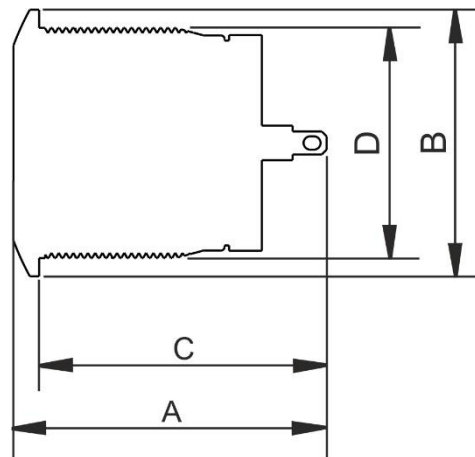

A	=	height (H)	=	23.6 / [0.077]
B	=	diameter front	=	22 / [0.072]
C	=	depth of cut-out	=	21.6 / [0.071]
D	=	diameter corpus	=	19 / [0.062]

8.4 Maintenance, overhaul and repair

The devices are maintenance-free across their entire lifespan. The following must be checked during maintenance work:

- Push button damage
- All screws are tightened fast
- All cables and lines are properly connected and undamaged

If the device in its factory state is damaged or altered in any way, decommission it immediately and contact the manufacturer !

8.5 Adjustment

not applicable

9 Training instructions

not applicable

10 Special conditions of use

- The clearances and creepage distances between the bare conducting parts of terminals of separate intrinsically safe circuits and to earthed or potential-free conducting parts shall be equal to or exceed the values given in IEC/EN 60079-11, Table 5.
- The insulation between an intrinsically safe circuit and a non-intrinsically safe circuit shall be capable of withstanding an r.m.s. a.c. test voltage with a minimum of 1500 V r.m.s.. When separation is accomplished by distance then the clearance between bare conducting parts of terminals shall be at least 50 mm / [0.164 ft].
- Where separate intrinsically safe circuits are being considered, the clearance distance between bare conducting parts of external connection facilities shall be at least 6 mm / [0.0197 ft] between the separate intrinsically safe circuits.
- For Da, Db, Dc application of the VB-PB-22mm-Z1/Z2-*, the requirements according to clause 5.6.5 of IEC 60079-11 have to be regarded.

11 Special tools

not applicable

12 Cells and Batteries

not applicable

13 Disposal / restricted substances

Disposal of old electric and electronic devices, packaging and used parts is subject to regulations valid in whichever country the device has been installed.

For countries under the jurisdiction of the EU the corresponding WEEE directive applies.

The push buttons are classified according to the table below:

Directive	WEEE II Directive 2012/19/EU
Valid	from 2018-08-15
Category	SG5 small devices <50 cm


R. STAHL HMI Systems GmbH meets the requirements of directive 2012/19/EU (WEEE) and is registered under the number DE 15180083.

We shall take back our devices according to our General Terms and Conditions.

13.1 RoHS directive 2011/65/EU

The push buttons meet the requirements of RoHS Directive 2011/65/EU.

14 Installation drawing

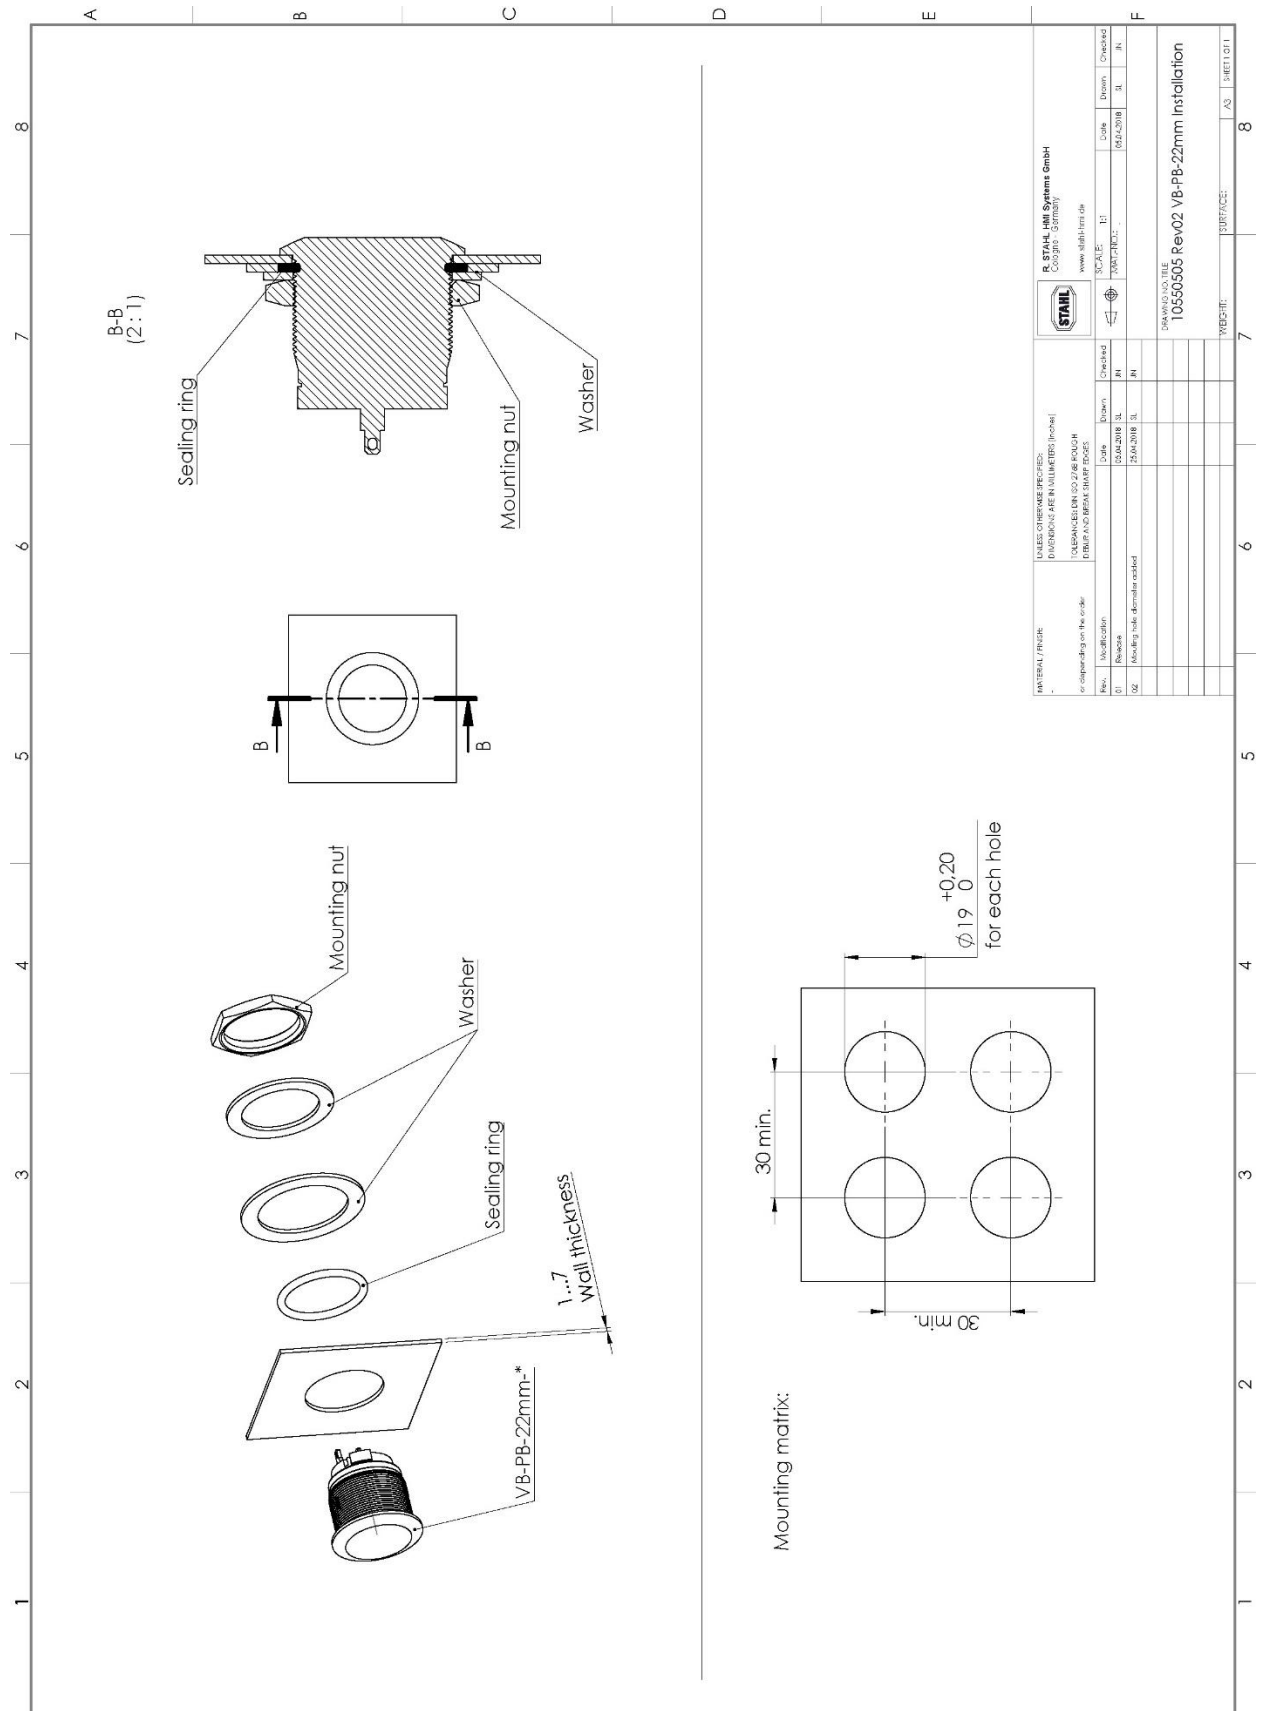

All rights reserved. Without our express consent this image may not be copied, made available to third parties or used in any other way not intended by the owner. State of the art - subject to technical or design alterations.

Alle Rechte vorbehalten | Diese Zeichnung darf ohne unsere ausdrückliche Zustimmung weiter veröffentlicht, noch Dritten zugänglich gemacht werden, außerdem darf sie durch den Empfänger oder durch Dritte nicht in anderer Art und Weise mündlich oder schriftlich weiterverbreitet werden.

Stand der Technik - technische bzw. konstruktive Änderungen vorbehalten.

MATERIAL / FINISH		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS (INCHES)		R. STAHL HMI Systems GmbH C. STEINLE (Chairman) www.stahlhmi.de	
or depending on the order		TOLERANCES UNLESS OTHERWISE SPECIFIED		www.stahlhmi.de	
Rev.	Modification	Date	Drawn	Date	Checked
01	Revised	02.04.2018	SL	02.04.2018	SL
02	Mounting hole diameter enlarged	25.04.2018	SL		IN
DRAWING TITLE		SCALE: 1:1		SHEET NO. 8	
10550505 Rev02 VB-PB-22mm Installation		SURFACE:		SHEET 01/1	

15 EU Declaration of conformity

EU-Konformitätserklärung
EU Declaration of Conformity
Déclaration de Conformité UE



R. STAHL HMI Systems GmbH • Adolf-Grimme-Allee 8 • 50829 Köln, Germany
 erklärt in alleiniger Verantwortung, *declares in its sole responsibility, déclare sous sa seule responsabilité,*

dass das Produkt: Taster
that the product: Button
que le produit: Bouton

Typ(en), *type(s)*, *type(s)*: **VB-PB-22mm-Z1-***
VB-PB-22mm-Z2-*
 *- any alphanumeric or symbolic character without relevance for explosion protection

mit den Anforderungen der folgenden Richtlinien und Normen übereinstimmt.
is in conformity with the requirements of the following directives and standards.
est conforme aux exigences des directives et des normes suivantes.

Richtlinie(n) / Directive(s) / Directive(s)		Norm(en) / Standard(s) / Norme(s)	
2014/34/EU	ATEX-Richtlinie	IEC 60079-0:2017	Das Produkt entspricht Anforderungen aus: <i>Product corresponds to requirements from:</i> <i>Produit correspond aux exigences:</i> EN 60079-0:2012/A11:2013 EN IEC 60079-0:2018
2014/34/EU	ATEX Directive	EN 60079-11:2012	
2014/34/UE	Directive ATEX		

Kennzeichnung, *marking, marquage:*

For VB-PB-22mm-Z1-*:
 II 2G Ex ia IIC Gb (ia circuits)
 II 2G Ex ib IIC Gb (ib circuits)
 II 2D Ex ia IIIC Db (ia circuits)
 II 2D Ex ib IIIC Db (ib circuits) **CE 0158**

Ex

For VB-PB-22mm-Z2-*:
 II 3G Ex ic IIC Gc (ia circuits)
 II 3D Ex ic IIIC Dc (ia circuits) **CE**

IEC 60079-0:2017, 29.10 kann für Kennzeichnung angewendet werden.
IEC 60079-0:2017, 29.10 may applied for marking.
IEC 60079-0:2017, 29.10 peut être appliqué sur le marquage.

EU-Baumusterprüfbescheinigung:
EU Type Examination Certificate:
Attestation d'examen UE de type:

BVS 18 ATEX E 031 U, BVS 18 ATEX E 034 U
DEKRA EXAM GmbH (NB 0158)
 Dinnendahlstraße 9, 44809 Bochum, Germany

2011/65/EU	RoHS-Richtlinie	EN IEC 63000:2018
2011/65/EU	RoHS Directive	
2011/65/UE	Directive RoHS	

Für spezifische Merkmale und Bedingungen siehe Betriebsanleitung.
For specific characteristics and conditions see operating instructions.
Pour les caractéristiques et conditions spécifiques, voir le mode d'emploi.

Köln, 2020-12-15

i.V.

i.V.

Ort und Datum
Place and date
Lieu et date

J. Düren
 Technical Director

A. Jung
 Ex Representative

17 Certificates

17.1 ATEX certification

17.1.1 Version VB-PB-22mm-Z1-*



1 EU-Type Examination Certificate

2 **Components intended for use on/in an Equipment or Protective System intended for use in potentially explosive atmospheres**
 Directive 2014/34/EU

3 EU-Type Examination Certificate Number: **BVS 18 ATEX E 031 U**

4 Product: **Push Button type VB-PB-22mm-Z1-***

5 Manufacturer: **R. STAHL HMI Systems GmbH**

6 Address: **Adolf-Grimme Allee 8, 50829 Köln, Germany**

7 This product and any acceptable variations thereto are specified in the appendix to this certificate and the documents referred to therein.

8 DEKRA EXAM GmbH, Notified Body number 0158, in accordance with Article 17 of Directive 2014/34/EU of the European Parliament and of the Council, dated 26 February 2014, certifies that this product has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of products intended for use in potentially explosive atmospheres given in Annex II to the Directive.
 The examination and test results are recorded in the confidential Report No. BVS PP 18.2056 EU.


9 Compliance with the Essential Health and Safety Requirements has been assured by compliance with:

IEC 60079-0:2017 General requirements
EN 60079-11:2012 Intrinsic Safety "i"


10 The sign "U" is placed after the certificate number. It indicates that this certificate must not be mistaken for a certificate intended for an equipment or protective system. This partial certification may be used as a basis for certification of an equipment or protective system respectively product.

11 This EU-Type Examination Certificate relates only to the design and construction of the specified product. Further requirements of the Directive apply to the manufacturing process and supply of this product. These are not covered by this certificate.

12 The marking of the product shall include the following:

 **II 2G Ex ia IIC Gb** (ia circuits)
II 2G Ex ib IIC Gb (ib circuits)
II 2D Ex ia IIIC Db (ia circuits)
II 2D Ex ib IIIC Db (ib circuits)

DEKRA EXAM GmbH
 Bochum, 2018-04-19



 Certifier



 Approver



Page 1 of 2 of BVS 18 ATEX E 031 U
 This certificate may only be reproduced in its entirety and without any change.

DEKRA EXAM GmbH, Dinnendahlstrasse 9, 44809 Bochum, Germany,
 telephone +49.234.3696-105, fax +49.234.3696-110, zs-exam@dekra.com



13 **Appendix**

14 **EU-Type Examination Certificate
BVS 18 ATEX E 031 U**

15 **Product description**

15.1 **Subject and type**

Push Button type VB-PB-22mm-Z1-*

*- any alphanumeric or symbolic characters without relevance for explosion protection

15.2 **Description**

The push button type VB-PB-22mm-Z1-* is a component; designed to switch Intrinsically Safe circuits.

It can be mounted in the wall of a separate container/enclosure e.g. in type of protection Increased Safety "e", Pressurization "p", Protection by Enclosure "t" or as well Intrinsic Safety "i". The connected circuit has to be intrinsically safe.

15.3 **Parameters**

Limits of service temperature -40 °C...+115 °C

Parameters of the intrinsically safe circuit via the switch contact:

voltage	U _i	DC	30 V
current	I _i		200 mA
power	P _i		1.1 W

Max. internal capacitance	C _i	negligible
Max. internal inductance	L _i	negligible

16 **Report Number**

BVS PP 18.2056 EU, as of 2018-04-19

17 **Installation Instructions**

17.1 The clearances and creepage distances between the bare conducting parts of terminals of separate intrinsically safe circuits and to earthed or potential-free conducting parts shall be equal to or exceed the values given in IEC 60079-11, Table 5.

17.2 The insulation between an intrinsically safe circuit and a non-intrinsically safe circuit shall be capable of withstanding an r.m.s. a.c. test voltage with a minimum of 1 500 V r.m.s. When separation is accomplished by distance the clearance between bare conducting parts of terminals shall be at least 50 mm.

17.3 Where separate intrinsically safe circuits are being considered, the clearance distance between bare conducting parts of external connection facilities shall be at least 6 mm between the separate intrinsically safe circuits.

17.4 For Db application, the VB-PB-22mm-Z1-* the requirements according to clause 5.6.5 of IEC 60079-11 have to be regarded.

18 **Essential Health and Safety Requirements**

The Essential Health and Safety Requirements are covered by the standards listed under item 9.

19 **Drawings and Documents**

Drawings and documents are listed in the confidential report.



Page 2 of 2 of BVS 18 ATEX E 031 U
This certificate may only be reproduced in its entirety and without any change.

DEKRA EXAM GmbH, Dinnendahlstrasse 9, 44809 Bochum, Germany,
telephone +49.234.3696-105, fax +49.234.3696-110, zs-exam@dekra.com

17.1.2 Version VB-PB-22mm-Z2-*



1 **Type Examination Certificate**

2 **Component Intended for use on/in an Equipment or Protective System intended for use in potentially explosive atmospheres**
Directive 2014/34/EU

3 Type Examination Certificate Number: **BVS 18 ATEX E 034 U**

4 Product: **Push Button type VB-PB-22mm-Z2-***

5 Manufacturer: **R. STAHL HMI Systems GmbH**

6 Address: **Adolf-Grimme Allee 8, 50829 Köln, Germany**

7 This product and any acceptable variations thereto are specified in the appendix to this certificate and the documents referred to therein.

8 DEKRA EXAM GmbH certifies that this product has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of products intended for use in potentially explosive atmospheres given in Annex II to the Directive.
 The examination and test results are recorded in the confidential Report No. BVS PP 18.2056 EU.

9 Compliance with the Essential Health and Safety Requirements has been assured by compliance with:

IEC 60079-0:2017 General requirements "
EN 60079-11:2012 Intrinsic Safety "i"


10 The sign "U" is placed after the certificate number. It indicates that this certificate must not be mistaken for a certificate intended for an equipment or protective system. This partial certification may be used as a basis for certification of an equipment or protective system respectively product.

11 This Type Examination Certificate relates only to the design and construction of the specified product. Further requirements of the Directive apply to the manufacturing process and supply of this product. These are not covered by this certificate.

12 The marking of the product shall include the following:

 **II 3G Ex ic IIC Gc** (ic circuits)
II 3D Ex ic IIIC Dc (ic circuits)

DEKRA EXAM GmbH
 Bochum, 2018-04-19



 Certifier



 Approver



Page 1 of 2 of BVS 18 ATEX E 034 U
 This certificate may only be reproduced in its entirety and without any change.
 DEKRA EXAM GmbH, Dinnendahlstrasse 9, 44809 Bochum, Germany,
 telephone +49.234.3696-105, fax +49.234.3696-110, zs-exam@dekra.com



13 **Appendix**

14 **Type Examination Certificate**
BVS 18 ATEX E 034 U

15 **Product description**

15.1 **Subject and type**

Push Button type VB-PB-22mm-Z2-*

*- any alphanumeric or symbolic characters without relevance for explosion protection

15.2 **Description**

The push button type VB-PB-22mm-Z2-* is a component; designed to switch Intrinsically Safe circuits.

It can be mounted in the wall of a separate container/enclosure e.g. in type of protection Increased Safety "e", Pressurization "p", Protection by Enclosure "t" or as well Intrinsic Safety "i". The connected circuit has to be intrinsically safe.

15.3 **Parameters**

Limits of service temperature -40 °C...+115 °C

Parameters of the intrinsically safe circuit via the switch contact:			
voltage	U_i	DC	30 V
current	I_i		200 mA
power	P_i		1,1 W

Max. internal capacitance	C_i	negligible
Max. internal inductance	L_i	negligible

16 **Report Number**

BVS PP 18.2056 EU, as of 2018-04-19

17 **Installation Instructions**

17.1 The clearances and creepage distances between the bare conducting parts of terminals of separate intrinsically safe circuits and to earthed or potential-free conducting parts shall be equal to or exceed the values given in IEC 60079-11, Table 5.

17.2 The insulation between an intrinsically safe circuit and a non-intrinsically safe circuit shall be capable of withstanding an r.m.s. a.c. test voltage with a minimum of 1,500 V r.m.s. When separation is accomplished by distance the clearance between bare conducting parts of terminals shall be at least 50 mm.

17.3 Where separate intrinsically safe circuits are being considered, the clearance distance between bare conducting parts of external connection facilities shall be at least 6 mm between the separate intrinsically safe circuits.

17.4 For Dc application, the VB-PB-22mm-Z2-* the requirements according to clause 5.6.5 of IEC 60079-11 have to be regarded.

18 **Essential Health and Safety Requirements**




The Essential Health and Safety Requirements are covered by the standards listed under item 9.

19 **Drawings and Documents**

Drawings and documents are listed in the confidential report.



17.2 IECEx certification

		<h2 style="text-align: right;">IECEX Certificate of Conformity</h2>	
<p>INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres <small>for rules and details of the IECEx Scheme visit www.iecex.com</small></p>			
Certificate No.:	IECEX BVS 18.0026U	issue No.:0	Certificate history:
Status:	Current		
Date of Issue:	2018-04-25	Page 1 of 4	
Applicant:	R. STAHL HMI Systems GmbH Adolf-Grimme Allee 8 50829 Köln Germany		
Equipment: Optional accessory:	Push button type VB-PB-22mm-Z1/Z2.*		
Type of Protection:	Equipment protection by intrinsic safety "I"		
Marking:	Ex ia IIC Gb (ia circuits) Type VB-PB-22mm-Z1-* Ex ib IIC Gb (ib circuits) Ex ia IIIC Db (ia circuits) Ex ib IIIC Db (ib circuits) Ex ic IIC Gc (ic circuits) -Type VB-PB-22mm-Z2-* Ex ic IIIC Dc (ic circuits)		
Approved for issue on behalf of the IECEx Certification Body:	Jörg Koch		
Position:	Head of Certification Body		
Signature: (for printed version)			
Date:	20.9.18		
1. This certificate and schedule may only be reproduced in full. 2. This certificate is not transferable and remains the property of the issuing body. 3. The Status and authenticity of this certificate may be verified by visiting the Official IECEx Website .			
Certificate issued by:			
DEKRA EXAM GmbH Dinnendahlstrasse 9 44809 Bochum Germany		On the safe side.	



IECEX Certificate of Conformity

Certificate No.: IECEx BVS 18.0026U
 Date of Issue: 2018-04-25 Issue No.: 0
 Manufacturer: R. STAHL HMI Systems GmbH
 Adolf-Grimme Allee 8
 50829 Köln
 Germany
 Page 2 of 4

Additional Manufacturing location(s):

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended.

STANDARDS:

The apparatus and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards:

- IEC 60079-0 : 2017** Explosive atmospheres - Part 0: Equipment - General requirements
Edition: 7.0
- IEC 60079-11 : 2011** Explosive atmospheres - Part 11: Equipment protection by intrinsic safety "i"
Edition: 6.0

*This Certificate **does not** indicate compliance with electrical safety and performance requirements other than those expressly included in the Standards listed above.*

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in

Test Report:
[DE/BVS/ExTR18.0028/00](#)

Quality Assessment Report:
[DE/BVS/QAR06.0007/09](#)



IECEx Certificate of Conformity

Certificate No.: IECEx BVS 18.0026U

Date of Issue: 2018-04-25

Issue No.: 0

Page 3 of 4

Schedule

EQUIPMENT:

Equipment and systems covered by this certificate are as follows:

Subject and Type

Push Button type VB-PB-22mm-Z1/Z2-*

*- any alphanumeric or symbolic characters without relevance for explosion protection

Description

The push button type VB-PB-22mm-Z1/Z2-* is a component; designed to switch Intrinsically Safe circuits. It can be mounted in the wall of a separate container/enclosure e.g. in type of protection Increased Safety "e", Pressurization "p", Protection by Enclosure "t" or as well Intrinsic Safety "i". The connected circuit has to be intrinsically safe.

SPECIFIC CONDITIONS OF USE: NO



IECEx Certificate of Conformity

Certificate No.: IECEx BVS 18.0026U
 Date of Issue: 2018-04-25
 Issue No.: 0
 Page 4 of 4

EQUIPMENT(continued):

Parameters

Rated service temperature range -40 °C up to +115 °C

Parameters of the intrinsically safe circuit via the switch contact:

voltage	U_i DC	30	V
current	I_i	200	mA
power	P_i	1.1	W

Max. internal capacitance C_i negligible

Max. internal inductance L_i negligible

"Schedule of Limitations" for Ex Components, if any:

1. The clearances and creepage distances between the bare conducting parts of terminals of separate intrinsically safe circuits and to earthed or potential-free conducting parts shall be equal to or exceed the values given in IEC 60079-11, Table 5.
2. The insulation between an intrinsically safe circuit and a non-intrinsically safe circuit shall be capable of withstanding an r.m.s. a.c. test voltage with a minimum of 1 500 V r.m.s. When separation is accomplished by distance the clearance between bare conducting parts of terminals shall be at least 50 mm.
3. Where separate intrinsically safe circuits are being considered, the clearance distance between bare conducting parts of external connection facilities shall be at least 6 mm between the separate intrinsically safe circuits.
4. For Db, Dc application, the VB-PB-22mm-Z1/Z2-* the requirements according to clause 5.6.5 of IEC 60079-11 have to be regarded.

18 Release notes

This chapter lists the changes made in the most recent versions of these Operating Instructions.

Version 01.00.00

- First edition

Version 01.00.01

- Adaption of OI according to current design
- Update of telephone and email data
- Update of section "Applied standards"
- Restructuring chapter "Applied standards, Approvals, Marking"
- Update of section "Disposal"
- Renew EU declaration of conformity
- Changing text (with and without lettering) according to documentation note in "Specific markings"
- Formal changes

R. STAHL HMI Systems GmbH
Adolf-Grimme-Allee 8
D 50829 Köln

T:	(Sales Support)	+49 221 768 06 - 1200
	(Technical Support)	+49 221 768 06 - 5000
F:		+49 221 768 06 - 4200
E:	(Sales Support)	sales.dehm@r-stahl.com
	(Technical Support)	support.dehm@r-stahl.com

r-stahl.com



THE STRONGEST LINK.