

9002/00-260-138-001 Art. No. 158867



- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, potential-free contacts and many more
- Compact and space-saving devices that are easy to install on a DIN rail
- Quick to install as barriers can be simultaneously snapped onto the rail and connected to PE

MY R. STAHL 9002A



The series 9002 INTRINSPAK dual-channel safety barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of safety barriers cover a wide variety of signals. The devices are incredibly robust and require very little space. The back-up fuse is a convenient feature as it is standardised for all variants.

Technical Data

Explosion Protection	
Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEEx gas certificate	IECEEx PTB 08.0057X
IECEEx gas explosion protection	Ex ec [ia Ga] IIC T4 Gc
IECEEx dust certificate	IECEEx PTB 08.0057X
IECEEx dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	PTB 01 ATEX 2053 X
ATEX gas explosion protection	II 3 (1) G Ex ec [ia Ga] IIC T4 Gc
ATEX dust certificate	PTB 01 ATEX 2053 X
ATEX dust explosion protection	II (1) D [Ex ia Da] IIIC
FMus certificate	3010778
Marking FMus	NONINCENDIVE FOR, Class I, Div. 2, Groups A,B,C,D; T4; Class I, Zone 2, Group IIC T4 IS connections for Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, Groups IIC/IIB Hazardous location when inst. per doc. 90 026 11 31 1
Certificate ULus	E81680V1S3
Marking ULus	For use in Hazardous location, Class I, Div. 2, Groups A,B,C,D; T4 Providing IS circuits for Class I,II,III, GROUPS A,B,C,D,E,F,G; per doc. 90 026 11 31 3
cCSA certificate	1284580
Marking cCSA	Associated equipment [Ex ia], Class I, Div. 2, Groups A,B,C,D; Provides IS circuits for Class I,II,III, Class I, Zone 0, Groups IIC/IIB For applicable grps per inst. doc. 90 016 11 31 2
Inmetro gas certificate	UL-BR 12.0354
Inmetro dust certificate	UL-BR 12.0354

9002/00-260-138-001 Art. No. 158867

Explosion Protection	
Certificates	ATEX (PTB), Brazil (ULB), Canada (CSA), Canada (FM), China (CQST), IECEx (PTB), India (PESO), Japan (CML), Korea (KGS), USA (FM), USA (UL)
Declaration of Conformity	ATEX (EUK), China (CCC)
Installation	in Zone 2, Division 2 and in safe areas
Further information	See relevant certificate and operating instructions

Safety Data					
Max. voltage U_o		26 V			
Max. current I_o		87 mA			
Max. power P_o		540 mW			
Max. permissible external capacity C_o for IIC		0.099 μ F			
Max. permissible external inductance L_o for IIC		2.7 mH			
Max. permissible external capacity C_o for IIB		0.77 μ F			
Max. permissible external inductance L_o for IIB		15.4 mH			
Intrinsically safe limiting values Inductance L_o /capacitance C_o		Jointly connectable inductance L_o /capacitance C_o			
Channel 1	IIC	L_o [mH]	2 mH	1 mH	0.100 mH
		C_o [μ F]	0.047 μ F	0.0610 μ F	0.0990 μ F
	IIB	L_o [mH]	10 mH	1 mH	0.1 mH
		C_o [μ F]	0.34 μ F	0.41 μ F	0.77 μ F
Channel 2	IIC	L_o [mH]	10 mH	1 mH	0.1 mH
		C_o [μ F]	0.110 μ F	0.150 μ F	0.188 μ F
	IIB	L_o [mH]	10 mH	1 mH	0.1 mH
		C_o [μ F]	0.72 μ F	0.93 μ F	1.20 μ F
Channels 1 + 2	IIC	L_o [mH]			
		C_o [μ F]			
	IIB	L_o [mH]	5 mH	1 mH	0.1 mH
		C_o [μ F]	0.320 μ F	0.37 μ F	0.770 μ F


Electrical Data	
Number of channels	2
Maximum resistance R_{max}	359 Ω
Minimum resistance R_{min}	321 Ω
Maximum output current I_{max}	62 mA
Potential channel 1	Negative
Potential channel 2	Negative
Transmission frequency channel 1	≤ 100 kHz
Type of voltage	DC
I_{leak} leakage current for U_n	≤ 2 μ A

Chan- nel	Nominal volt- age U_N	Maximum output current I_{max}	Minimum resist- ance R_{min}	Maximum resist- ance R_{max}	Maximum voltage U_o	Maximum current I_o	Maximum power P_o
1	22.50 V DC	62 mA	321 Ω	359 Ω	26 V	87 mA	540 mW
2	17.50 V	37 mA	417 Ω	464 Ω	20 V	51 mA	245 mW
1 + 2					26 V	138 mA	785 mW


9002/00-260-138-001 Art. No. 158867

Auxiliary Power	
Power supply	Controlled
Output	
Temperature influence	≤ 0,25 %/10K
Ambient Conditions	
Ambient temperature	-20 °C ... 60 °C
Ambient temperature	-4°F ... +140°F
Storage temperature	-20 °C ... 75 °C
Storage temperature	-4°F ... +167°F
Maximum relative humidity	95% average, no condensation
Mechanical Data	
Degree of protection (IP)	IP40
Degree of protection (IP) terminals	IP20
Enclosure material	Polyamide 6GF
Number of connection terminals	4
Connection cross-section max.	1.5 mm²
Connection cross-section AWG	16 AWG
Type of connection cable	Solid Finely stranded
Width	103 mm
Width, inches	4.09 in
Length	12 mm
Length, inches	0.48 in
Depth of cut-out	72 mm
Mounting depth, inches	2.76 in
Weight	110 g
Weight	0.24 lb
Mounting / Installation	
Earthing connection cross-section	4 mm²
Earthing conductor cross-section AWG	12 AWG
Connection type	2 PA
Min. torque, Nm	0.5 Nm
Min. torque, lb/in	4.43 lb/in
Max. torque, Nm	0.6 Nm
Max. torque, lb/in	5.31 lb/in





Technical Drawings – Subject to Alterations

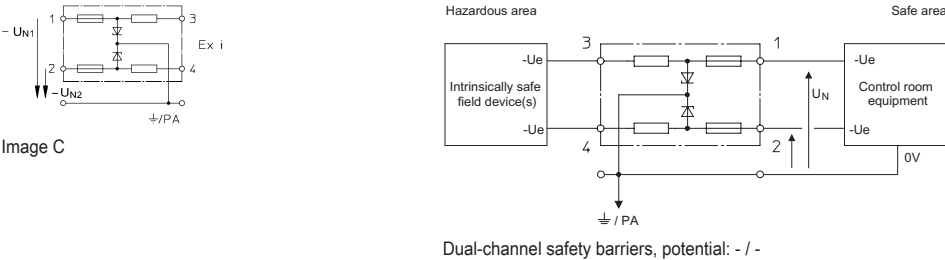

9002/00-260-138-001 Art. No. 158867

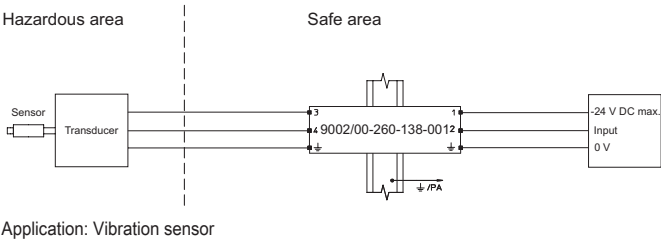

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

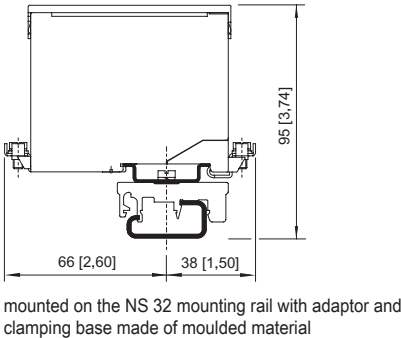

Accessories

Terminal block

	Phoenix Contact terminal block UT 4-PE	Art. No. 113057
	Phoenix Contact terminal block UT 6-PE	Art. No. 113058

Adaptor

	The adaptor enables a series 900x safety barrier to be installed on a mounting plate from a previous series.	Art. No. 158826
--	--	-----------------


Clamping base, moulded material

	Enables the safety barrier to be mounted on a G-rail.	Art. No. 165283
--	---	-----------------

9002/00-260-138-001 Art. No. 158867

Fuse holder		Art. No.
 	The fuse holder is snapped onto the side of a safety barrier and can be equipped with up to five back-up fuses (replacement).	158834

Spare Parts

Back-up fuse		Art. No.
	For all series 9001, 9002 and 9004 safety barriers Packaging unit: 5 pieces	158964

Label carrier		Art. No.
 	Transparent cover for the label	158977

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.