

Multi-cable for camera connections

VB-CAM-MULTI-11-UNI


Multi cable for the EC-710-0xx compact camera.
Includes all necessary wires for power supply and picture transfer.

Camera Types:

- EC-710-0xx

Temperature Range:

-40°C to +85°C

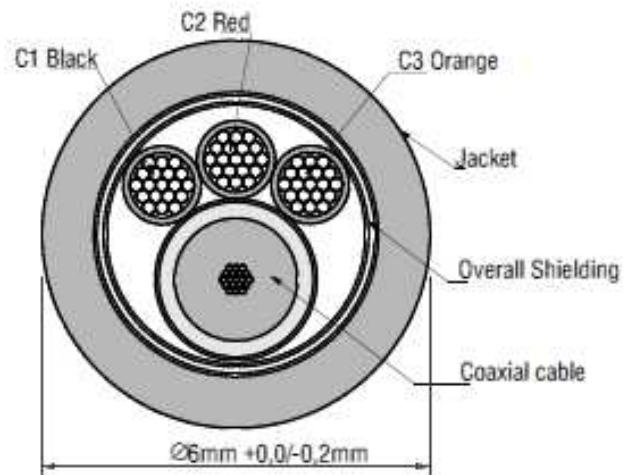

VB-CAM-MULTI-11-UNI

Data sheet 2014 | R1-0 | EN



Technical data	
Overall shielding	Tinned copper, braided >85%
Coax	Coax Cable 1 x AWG26, 19 x 0,10 mm Core: CU-ETP1 according DIN EN 13602 Shield tinned copper braided >85%, Sheat PP
C1to C3 Conductor	3 x AWG22, 7 x 0,25mm, tinned copper Colour: Black, Red, Orange
Jacket	TPE-U Sh A 85 +/-5; Colour: Black RAL 9005
Inner jacket	Overall diameter 6mm +/-0,2mm, Colour: Black RAL 9005
Temperature range	-40°...+85°C
Min. bending radius	7,5 x Diameter (Static)
Impedance coax	75 Ω
Approvals	Chemical resistance: Oil, Mud. Fire resist: IEC 60332-3 Halogen free: DIN VDE 0472 part 815