

# Lighting

## Linear luminaire With LED

### GRP industrial design

L402/4368-6200-152-1110-11-8500 Art. No. 285176



- Highly resistant industrial design
- Linear luminaire with long-life, efficient LED technology (up to 138 lm/W)
- Lightweight yet extremely robust, with an impact strength rating of IK10

## MY R. STAHL L402A

The EXLUX L402/4 luminaire is designed for industrial use and can be fitted to the ceiling, a pole, or alternatively, it can be suspended. A bright light for not much energy is what you get with this efficient LED technology, which offers the added benefit of increased service life – this can be as much as 100,000 hours. The plastic enclosure is easily to open by a central lock.

## Technical Data

### Explosion Protection

Ex version	Industrial design
------------	-------------------

### Electrical Data

Rated operational voltage AC	220 ... 240 V
------------------------------	---------------

Rated operational voltage DC	200 ... 250 V
------------------------------	---------------

Frequency range	50 – 60Hz
-----------------	-----------

### Lighting Data

Number of lamps	1
-----------------	---

Lamp wattage	50 W
--------------	------

Lamp	LED
------	-----

Light colour	5000 K – neutral white
--------------	------------------------

Light distribution	120°x120° with diffusing glass
--------------------	--------------------------------

Luminaire efficacy	139 lm/W
--------------------	----------

Luminous flux	6960 lm
---------------	---------

Colour rendering	≥ 80
------------------	------

Colour temperature	5000 K
--------------------	--------

### Ambient Conditions

Ambient temperature	-20 °C ... 55 °C Note: Through wiring Max. 3x16 A -20 °C ... 60 °C Note: Through wiring 2 Max. 3x10 A
---------------------	--

Note	Through wiring max. 3x16 A Ambient temperature °C -40 °C ... +55 °C Through wiring 2 max. 3x10 A Ambient temperature °C 2 -40 ... +60 °C
------	---

### Mechanical Data

Version	Standard
---------	----------

IP degree of protection (IEC 60598)	IP66
-------------------------------------	------

Class	I (with inner PE connection)
-------	------------------------------

Enclosure material	Polyester resin, Glass fibre reinforced
--------------------	---

# Lighting

## Linear luminaire With LED

### GRP industrial design

L402/4368-6200-152-1110-11-8500 Art. No. 285176




#### Mechanical Data

Enclosure colour	Light grey (RAL 7035)
Diffuser	With diffuser
Sealing material	Silicone
Silicone-free content	Contains silicone
Translucent cover material	Polycarbonate
Installed terminal strip	PE + N + L1 + L2 + L3
Max. solid connection terminals	6 mm <sup>2</sup>
Max. finely stranded connection terminals	4 mm <sup>2</sup>
Type of connection cable	Finely stranded Solid
Size	6
Width	184 mm
Height	125 mm
Length	1610 mm
Impact strength (IEC 62262)	IK10
Weight	7 kg
Weight	15.43 lb
Disconnection of the luminaire	No

#### Components

Threaded plate	2x plastic
Ballast	VG Luxtronic 80 W 350 mA
Through wiring	With 5 conductors 2.5 mm <sup>2</sup>
Drilled holes	3 x M25
Cable glands and entries	2 x M25 Ø 7 ...
Material cable gland	Polyamide, black
Stopping plugs	2 x M25 x 1.5
Stopping plug material	Polyamide, black
Accessories	Provided

#### Light Distribution Curves

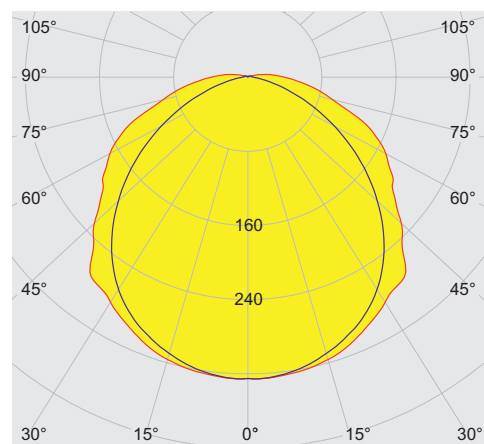

cd/klm 100%  
— C0 - C180 — C90 - C270  
typical with diffusor, clear translucent cover

# Lighting


Linear luminaire With LED

GRP industrial design

L402/4368-6200-152-1110-11-8500 Art. No. 285176




## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

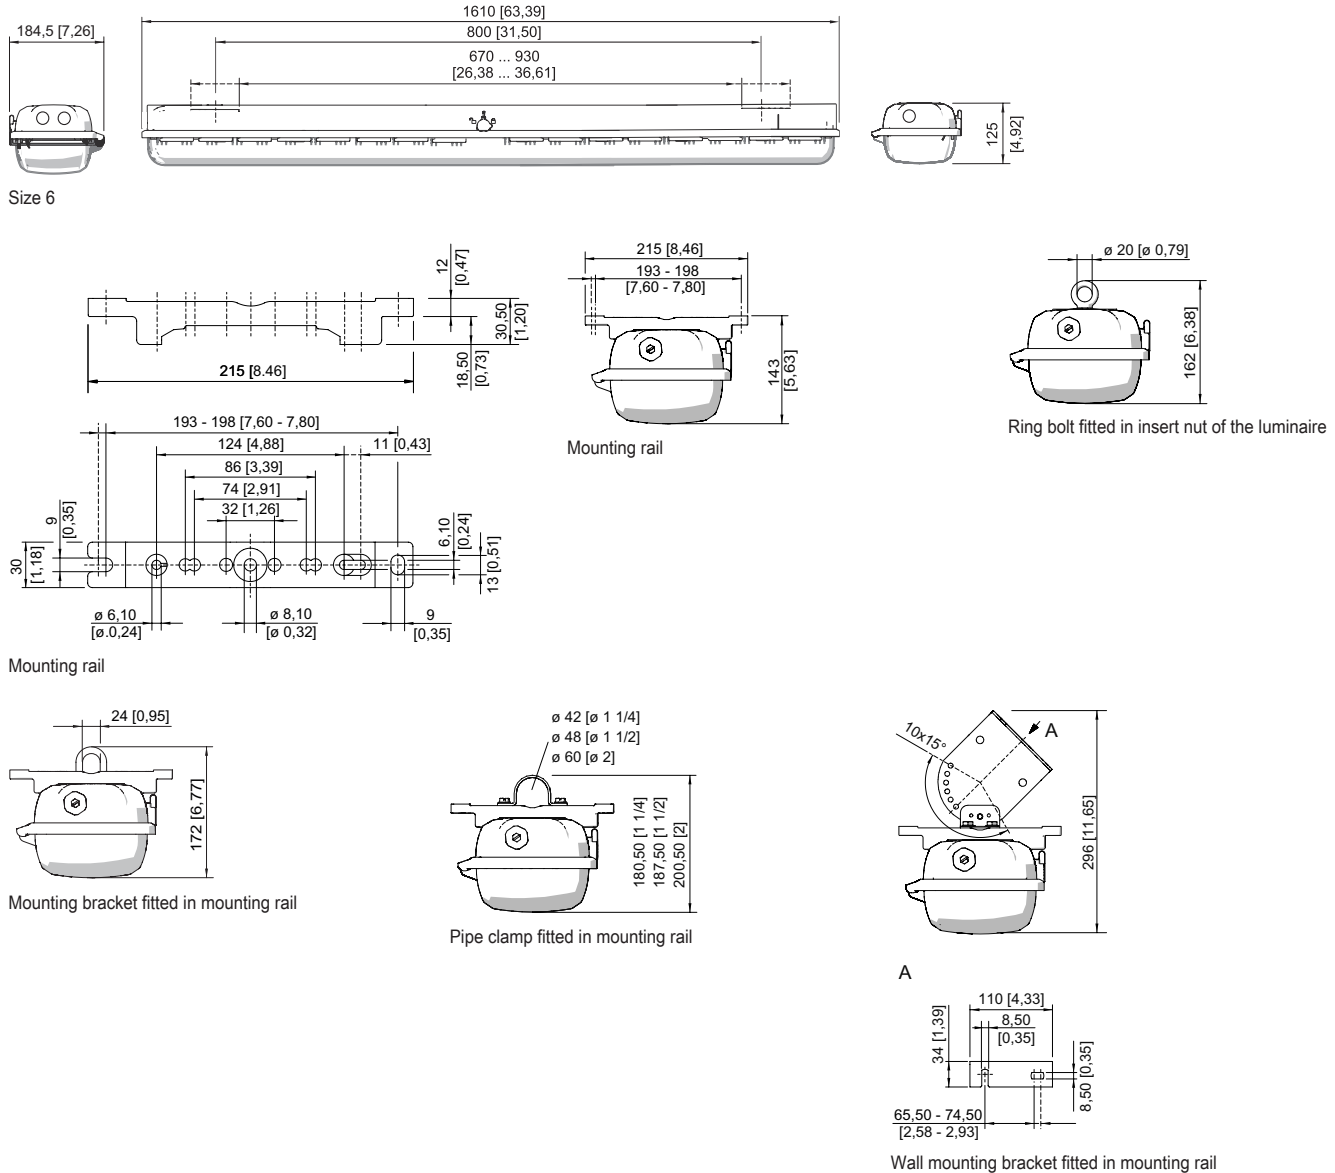

## Accessories

### Box spanner




M8 / A/F 13;  
For actuating the central lock

Art. No.

222430

### Breather



Thread: M25 x 1.5 (20 pieces); without jam nut

Art. No.

285780










# Lighting

Linear luminaire With LED

GRP industrial design

L402/4368-6200-152-1110-11-8500 Art. No. 285176



	Thread: M25 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut	296608
	M25 x 1.5 in order to avoid condensate formation	115738
<b>Ceiling and wall mounting bracket</b>		<b>Art. No.</b>
	mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair	222827
<b>Holder for translucent cover</b>		<b>Art. No.</b>
	The fall prevention system for the light fitting cover prevents the light fitting cover from falling accidentally when the light fitting is opened.	226791
<b>Mounting bracket</b>		<b>Art. No.</b>
	mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair	222456
<b>Mounting rail</b>		<b>Art. No.</b>
	for a variable mounting distance; 1 pair	222826
<b>Pipe clamp</b>		<b>Art. No.</b>
	R 1 1/2"; with mounting rail for a variable mounting distance; material: stainless steel; 1 pair	222459
	R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222458
	R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222460
<b>Protection against accidental contact</b>		<b>Art. No.</b>
	The protection against accidental contact prevents maintenance technicians and electrical installers from accidentally touching conductive parts. The degree of protection is increased to IP20 when the protection against accidental contact is used.	283153
<b>Ring bolt</b>		<b>Art. No.</b>
	M8, direct mounting in insert nuts; 1 pair	115736

## Spare Parts

# Lighting

Linear luminaire With LED

GRP industrial design

L402/4368-6200-152-1110-11-8500 Art. No. 285176



Cover		Art. No.
	for luminaire size 6	222429

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.