

# Control and signalling devices

Control device system Series ConSig 8040

LED indicator lamp

8040/11E8X-54C02SA70 Art. No. 287010



ConSig



- Quad certified control stations (NEC®, CE Code, ATEX, IECEx)
- Lightweight enclosure made of glass fibre reinforced polyester (FRP), excellent for corrosive atmospheres
- Offers a variety of pushbuttons, illuminated pushbuttons, control switches and LEDs for different configurations
- Customisable control stations available upon request with different entry, contact options and additional certifications

MY R. STAHL 8040E



R. STAHL's series 8040 NEC® / CE Code control stations utilize explosion-protected components with non-metallic enclosures for the ultimate flexibility, safety and durability in hazardous and hostile locations. Choose from one of the standard versions or contact us for a customised solution.

## Technical Data

### Explosion Protection

|                                 |  |
|---------------------------------|--|
| Area of application             | European Union (ATEX)<br>Canada<br>IECEx<br>USA  |
| Application range (zones)       | 1, 2, 21, 22   |
| IECEx gas certificate           | IECEx PTB 06.0025  |
| IECEx gas certificate           | PTB 01 ATEX 1105   |
| IECEx gas explosion protection  | Ex db eb IIC T6 Gb   |
| IECEx dust certificate          | IECEx PTB 06.0025  |
| IECEx dust explosion protection | Ex tb IIIC T80 °C Db   |
| ATEX gas certificate            | PTB 01 ATEX 1105   |
| ATEX gas certificate            | PTB 01 ATEX 1105   |
| ATEX gas explosion protection   | ⊕ II 2 G Ex db eb IIC T6 Gb  |
| ATEX dust certificate           | PTB 01 ATEX 1105   |
| ATEX dust explosion protection  | ⊕ II 2 D Ex tb IIIC T80 °C Db  |
| Certificate ULus                | E182378V1S5  |
| Marking ULus                    | Class I, Div. 2, Groups A,B,C,D<br>Class II, III, Div. 2, Groups F,G<br>Class I, Zone 1, AEx db eb IIC T6<br>Enclosure Type 3, 4, 4X |
| Certificate cUL                 | E182378V1S5  |
| Marking cUL                     | Ex db eb IIC T6<br>Class I, Div. 2, Groups A,B,C,D<br>Class II, III, Div. 2, Groups F,G<br>Enclosure Type 3, 4, 4X                   |
| Certificates                    | ATEX (PTB), Brazil (ULB), Canada (UL), China (NEPSI), IECEx (PTB), India (PESO), Korea (KGS), Taiwan (ITRI), USA (UL)                |
| Ship approval                   | DNVGL  |
| Notes                           | Product label for standard configurations as NEC®, CE Code, ATEX, and IECEx. For additional certifications, contact factory.         |

# Control and signalling devices

Control device system Series ConSig 8040

LED indicator lamp

8040/11E8X-54C02SA70 Art. No. 287010



## Electrical Data

|                              |       |
|------------------------------|-------|
| Rated operational voltage AC | 250 V |
|------------------------------|-------|

## Ambient Conditions

|                     |                    |
|---------------------|--------------------|
| Ambient temperature | -50 °C ... 40 °C   |
| Ambient temperature | -58 °F ... +104 °F |

## Mechanical Data

|  |  |
|--|--|
| IP degree of protection (IEC 60529)          | IP66   |
| Enclosure type (UL50 & UL50E)                | 3, 4, 4X                                       |
| Enclosure material                           | Polyester resin, Glass fibre reinforced        |
| Enclosure colour                             | Dark grey                                      |
| Silicone-free                                | No   |
| Clamping range AWG                           | 14 AWG   |
| Connection cross-section max.                | 2.5 mm <sup>2</sup>                            |
| Solid connection cross section               | 0.32 – 2.5 mm <sup>2</sup>                     |
| Connection cross-section AWG single stranded | 22 AWG ... 14 AWG                              |
| Finely stranded connection cross section     | 0.32 – 2.5 mm <sup>2</sup>                     |
| Finely stranded connection cross-section AWG | 22 AWG ... 14 AWG                              |
| Cover fixing type                            | With captive screws, M4 stainless steel screws |
| Width  | 80 mm  |
| Width, inches                                | 3.15 in  |
| Height                                       | 93 mm  |
| Height in inches                             | 3.66 in  |
| Depth  | 72 mm  |
| Depth in inches                              | 2.76 in  |
| Seal   | Silicone, foamed                               |
| Weight                                       | 738 g  |
| Weight                                       | 1.63 lb  |

## Mounting / Installation

|   |             |
|---|-------------|
| Tightening torque of cover screw 1        | 1.4 Nm      |
| Tightening torque of cover screw 1 lbf in | 12.4 lbf in |

## Components

|                              |   |
|------------------------------|---|
| Installation position middle | Indicator lamp bezel, Green, With silicone seal |
| Built-in element middle      | LED indicator lamp                              |
| Flange and plates            | Metal plate, bottom                             |
| Cable glands and entries     | NPT 3/4   |
| Entry type                   | CMP   |
| Entry 1 type                 | Metal adaptor                                   |
| Entry 1                      | NPT 3/4"  |
| Metal entry possible 1       | Yes   |

# Control and signalling devices


Control device system Series ConSig 8040

LED indicator lamp


8040/11E8X-54C02SA70 Art. No. 287010



## Technical Drawings – Subject to Alterations



## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

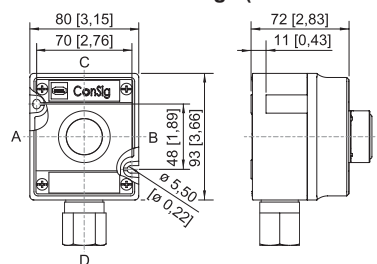

ConSig 8040/11E

## Accessories

### Indicator lamp bezel

BG054



Diameter 39 mm  
All colours  
Silicone-free: No

Art. No.

223123

## Spare Parts

### Caps for BG054



for indicator lamp, all colours packaged

Art. No.

248685

### Label holder



Size 1, without insert disc, 1-line label  
for actuators  $\varnothing 39$

Art. No.

223566



Size 2, without insert disc, 1- or 2-line label  
for actuators  $\varnothing 39$

223567



Size 3, without insert disc, 1-, 2- or 3-line label  
for actuators  $\varnothing 39$

223568

## Control and signalling devices

Control device system Series ConSig 8040

LED indicator lamp

8040/11E8X-54C02SA70 Art. No. 287010



### Special key

### Art. No.




for tightening plastic locking nut

169101

### Tag label

### Art. No.



plain  
for attaching to enclosure 8040; moulded material;  
with paper insert strip

130673

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.