


CMP-20s16PX2K Art. No. 109426



- Ex d and Ex e cable gland for all armoured cables: SWA, wire-braid and tape made of steel or aluminium
- Seal: Explosion-protected seal with compound, controlled outer load retention seal, flood seal with integral protection
- Internationally certified in accordance with IECEx, ATEX, UL and cCSAus, EMC-tested

MY R. STAHL PX2KA

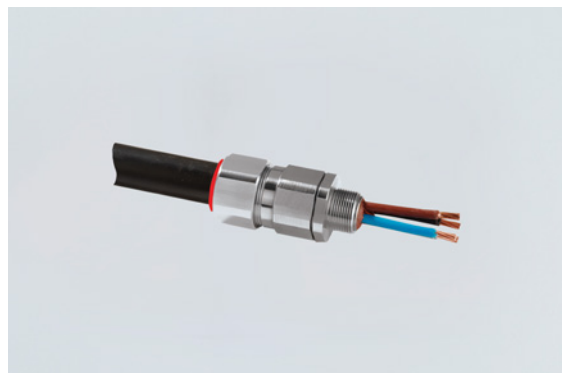

The Series PX2K metal Ex d and Ex e barrier cable glands are suitable for all types of armoured cables, i.e. for SWA, wire-braid and tape armouring made of steel and aluminium. They are equipped with a compound barrier. They have a multifunctional holder for the armouring and various seals. They are also EMC-tested.

Technical Data

| Explosion Protection | |
|--|--|
| Ex version | Ex e & Ex d & Ex nR & Ex ta |
| Application range (zones) | 1, 2, 20, 21, 22 |
| IECEX gas certificate | IECEX CML 18.0182X |
| IECEX gas certificate 2 | IECEX SIM 14.0008 X |
| IECEX gas explosion protection | Ex db IIC Gb |
| IECEX dust certificate | IECEX CML 18.0182X |
| IECEX dust explosion protection | Ex ta IIIC Da |
| IECEX firedamp certificate | IECEX CML 18.0182X |
| IECEX firedamp protection | Ex db I Mb |
| IECEX firedamp protection 2 | Ex eb I Mb |
| IECEX restricted breathing certificate | IECEX CML 18.0182X |
| IECEX restricted breathing | Ex nR IIC Gc |
| ATEX gas certificate | CML 18ATEX1325X |
| ATEX gas certificate 2 | CML 18ATEX4317X |
| ATEX gas explosion protection | ⊕ II 2 G Ex db IIC Gb |
| ATEX dust certificate | CML 18ATEX1325X |
| ATEX dust explosion protection | ⊕ II 1 D Ex ta IIIC Da |
| ATEX firedamp certificate | CML 18ATEX1325X |
| ATEX firedamp protection | ⊕ I M2 Ex db I Mb |
| ATEX firedamp protection 2 | ⊕ I M2 Ex eb I Mb |
| ATEX restricted breathing certificate | CML 18ATEX1325X |
| ATEX restricted breathing | ⊕ II 3 G Ex nR IIC Gc |
| Notes | The product certificates can be downloaded from the manufacturer's homepage (www.cmp-products.com) |
| Ambient Conditions | |
| Ambient temperature | -60 °C ... +85 °C |

Installation equipment and accessories

Cable gland with compound



CMP-20s16PX2K Art. No. 109426

Mechanical Data

| | |
|--------------------------------|---|
| Version | 20s16 |
| Strain relief | No |
| Degree of protection (IP) | IP66 |
| Degree of protection note | IP67 and IP68 mounting according to the specifications of the manufacturer, CMP. The specified degrees of protection are only fulfilled if CMP installation accessories are used. |
| Degree of protection (IP) UL | IP66 |
| Sealing material | SOLO LSF |
| Sealing ring material | Viton |
| Material | Nickel-plated brass |
| Silicone-free | Yes |
| Number of cables | 1 |
| Clamping range | 6.1 – 13.1 mm |
| Armouring type | All armouring |
| Armouring type 2 | Without lead sheath |
| Armouring type 3 | With barrier seal |
| Max. armour wire thickness | 999.99 mm |
| Clamping range | 6.1 ... 13.1 mm |
| Max. number of cores | 11 |
| Construction type | BS 6121, IEC/EN 62444 |
| Width across corners | 33.6 mm |
| Width across flats | 30.5 mm |
| Thread size | M20 |
| Thread length | 15 mm |
| Thread pitch | 1,5 |
| Thread standard | metric |
| Gland size | 20s/16 |
| Grooved cone | 0.3 ... 1 mm |
| Stepped cone | 0.8 ... 1.25 mm |
| Inner sheath | 11.7 mm |
| Max. internal conduit diameter | 11.7 mm |
| Outer sheath | 6.1 ... 13.1 mm |
| Protrusion length | 62 mm |
| Impact strength (IEC 60079) | 7 J |
| Impact strength | 20 J |
| PVC boot | PVC06 |
| Lot size | 1 |
| Weight | 240 g |
| Weight | 0.53 lb |


Installation equipment and accessories

Cable gland with compound



CMP-20s16PX2K Art. No. 109426

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

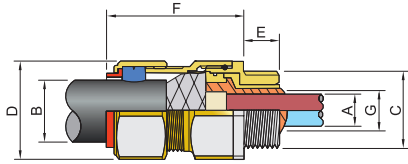

- A = Max. inner sheath
- G = Max. internal conduit diameter
- B = Outer sheath
- C = Thread size
- D = Width across corners
- D = Width across flats
- E = Thread length
- F = Protrusion length

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.