

9002/13-280-093-001 Art. No. 158852



- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, potential-free contacts and many more
- Compact and space-saving devices that are easy to install on a DIN rail
- Quick to install as barriers can be simultaneously snapped onto the rail and connected to PE

### MY R. STAHL 9002A



The series 9002 INTRINSPAK dual-channel safety barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of safety barriers cover a wide variety of signals. The devices are incredibly robust and require very little space. The back-up fuse is a convenient feature as it is standardised for all variants.

### Technical Data

| Explosion Protection            |                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application range (zones)       | 2                                                                                                                                                                                                                                                       |
| Ex interface zone               | 0, 1, 2, 20, 21, 22                                                                                                                                                                                                                                     |
| IECEX gas certificate           | IECEX PTB 08.0057X                                                                                                                                                                                                                                      |
| IECEX gas explosion protection  | Ex ec [ia Ga] IIC T4 Gc                                                                                                                                                                                                                                 |
| IECEX dust certificate          | IECEX PTB 08.0057X                                                                                                                                                                                                                                      |
| IECEX dust explosion protection | [Ex ia Da] IIIC                                                                                                                                                                                                                                         |
| ATEX gas certificate            | PTB 01 ATEX 2053 X                                                                                                                                                                                                                                      |
| ATEX gas explosion protection   | II 3 (1) G Ex ec [ia Ga] IIC T4 Gc                                                                                                                                                                                                                      |
| ATEX dust certificate           | PTB 01 ATEX 2053 X                                                                                                                                                                                                                                      |
| ATEX dust explosion protection  | II (1) D [Ex ia Da] IIIC                                                                                                                                                                                                                                |
| FMus certificate                | 3010778                                                                                                                                                                                                                                                 |
| Marking FMus                    | NONINCENDIVE FOR, Class I, Div. 2, Groups A,B,C,D; T4;<br>Class I, Zone 2, Group IIC T4<br>IS connections for Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G;<br>Class I, Zone 0, Groups IIC/IIB<br>Hazardous location when inst. per doc. 90 026 11 31 1 |
| Certificate ULus                | E81680V1S3                                                                                                                                                                                                                                              |
| Marking ULus                    | For use in Hazardous location, Class I, Div. 2, Groups A,B,C,D; T4<br>Providing IS circuits for<br>Class I,II,III, GROUPS A,B,C,D,E,F,G;<br>per doc. 90 026 11 31 3                                                                                     |
| cCSA certificate                | 1284580                                                                                                                                                                                                                                                 |
| Marking cCSA                    | Associated equipment [Ex ia], Class I, Div. 2, Groups A,B,C,D;<br>Provides IS circuits for Class I,II,III,<br>Class I, Zone 0, Groups IIC/IIB<br>For applicable grps per inst. doc. 90 016 11 31 2                                                      |
| Inmetro gas certificate         | UL-BR 12.0354                                                                                                                                                                                                                                           |
| Inmetro dust certificate        | UL-BR 12.0354                                                                                                                                                                                                                                           |

9002/13-280-093-001 Art. No. 158852

### Explosion Protection

|                           |                                                                                                                              |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Certificates              | ATEX (PTB), Brazil (ULB), Canada (FM), China (CQST), IECEx (PTB), India (PESO), Japan (CML), Korea (KGS), USA (FM), USA (UL) |
| Declaration of conformity | ATEX (EUK), China (CCC)                                                                                                      |
| Installation              | in Zone 2, Division 2 and in safe areas                                                                                      |
| Further information       | See relevant certificate and operating instructions                                                                          |

### Safety Data

|                                                                                             |     |                     |                                                                              |          |           |
|---------------------------------------------------------------------------------------------|-----|---------------------|------------------------------------------------------------------------------|----------|-----------|
| Max. voltage U <sub>o</sub>                                                                 |     |                     | 28 V                                                                         |          |           |
| Max. current I <sub>o</sub>                                                                 |     |                     | 90 mA                                                                        |          |           |
| Max. power P <sub>o</sub>                                                                   |     |                     | 630 mW                                                                       |          |           |
| Max. permissible external capacity C <sub>o</sub> for IIC                                   |     |                     | 0.083 µF                                                                     |          |           |
| Max. permissible external inductance L <sub>o</sub> for IIC                                 |     |                     | 2.2 mH                                                                       |          |           |
| Max. permissible external capacity C <sub>o</sub> for IIB                                   |     |                     | 0.65 µF                                                                      |          |           |
| Max. permissible external inductance L <sub>o</sub> for IIB                                 |     |                     | 14 mH                                                                        |          |           |
| Intrinsically safe limiting values<br>Inductance L <sub>o</sub> /capacitance C <sub>o</sub> |     |                     | Jointly connectable<br>inductance L <sub>o</sub> /capacitance C <sub>o</sub> |          |           |
| Channel 1                                                                                   | IIC | L <sub>o</sub> [mH] | 1 mH                                                                         |          | 0.100 mH  |
|                                                                                             |     | C <sub>o</sub> [µF] | 0.0520 µF                                                                    |          | 0.0830 µF |
|                                                                                             | IIB | L <sub>o</sub> [mH] | 10 mH                                                                        | 1 mH     | 0.1 mH    |
|                                                                                             |     | C <sub>o</sub> [µF] | 0.25 µF                                                                      | 0.35 µF  | 0.65 µF   |
| Channel 2                                                                                   | IIC | L <sub>o</sub> [mH] | 50 mH                                                                        | 1 mH     | 0.1 mH    |
|                                                                                             |     | C <sub>o</sub> [µF] | 0.062 µF                                                                     | 0.075 µF | 0.083 µF  |
|                                                                                             | IIB | L <sub>o</sub> [mH] | 50 mH                                                                        | 1 mH     | 0.1 mH    |
|                                                                                             |     | C <sub>o</sub> [µF] | 0.34 µF                                                                      | 0.41 µF  | 0.65 µF   |
| Channels 1<br>+ 2                                                                           | IIC | L <sub>o</sub> [mH] |                                                                              |          |           |
|                                                                                             |     | C <sub>o</sub> [µF] |                                                                              |          |           |
|                                                                                             | IIB | L <sub>o</sub> [mH] | 5 mH                                                                         | 1 mH     | 0.1 mH    |
|                                                                                             |     | C <sub>o</sub> [µF] | 0.250 µF                                                                     | 0.36 µF  | 0.551 µF  |

### Electrical Data

|                                      |                     |
|--------------------------------------|---------------------|
| Number of channels                   | 2                   |
| Maximum resistance $R_{max}$         | 359 $\Omega$        |
| Minimum resistance $R_{min}$         | 322 $\Omega$        |
| Maximum output current $I_{max}$     | 67 mA               |
| Potential channel 1                  | Positive            |
| Potential channel 2                  | Positive with diode |
| Transmission frequency channel 1     | $\leq 100$ kHz      |
| Channel 2 auxiliary voltage drop     | 2 V                 |
| Type of voltage                      | DC                  |
| $I_{leak}$ leakage current for $U_n$ | $\leq 2$ $\mu$ A    |

| Chan-<br>nel | Nominal volt-<br>age $U_N$ | Maximum output<br>current $I_{max}$ | Minimum resist-<br>ance $R_{min}$ | Maximum resist-<br>ance $R_{max}$ | Maximum<br>voltage $U_o$ | Maximum<br>current $I_o$ | Maximum<br>power $P_o$ |
|--------------|----------------------------|-------------------------------------|-----------------------------------|-----------------------------------|--------------------------|--------------------------|------------------------|
| 1            | 24.00 V DC                 | 67 mA                               | 322 $\Omega$                      | 359 $\Omega$                      | 28 V                     | 90 mA                    | 630 mW                 |
| 2            | 24 V                       |                                     |                                   |                                   | 28 V                     | 3 mA                     | 21 mW                  |

9002/13-280-093-001 Art. No. 158852

|       |  |  |  |  |      |       |        |
|-------|--|--|--|--|------|-------|--------|
| 1 + 2 |  |  |  |  | 28 V | 93 mA | 651 mW |
|-------|--|--|--|--|------|-------|--------|

### Auxiliary Power

|              |            |
|--------------|------------|
| Power supply | Controlled |
|--------------|------------|

### Output

|                       |                                   |
|-----------------------|-----------------------------------|
| Temperature influence | $\leq 0,25 \text{ \%}/10\text{K}$ |
|-----------------------|-----------------------------------|

### Ambient Conditions

|                           |                              |
|---------------------------|------------------------------|
| Ambient temperature       | -20 °C ... 60 °C             |
| Ambient temperature       | -4°F ... +140°F              |
| Storage temperature       | -20 °C ... 75 °C             |
| Storage temperature       | -4°F ... +167°F              |
| Maximum relative humidity | 95% average, no condensation |

### Mechanical Data

|                                     |                          |
|-------------------------------------|--------------------------|
| Degree of protection (IP)           | IP40                     |
| Degree of protection (IP) terminals | IP20                     |
| Enclosure material                  | Polyamide 6GF            |
| Number of connection terminals      | 4                        |
| Connection cross-section max.       | 1.5 mm <sup>2</sup>      |
| Connection cross-section AWG        | 16 AWG                   |
| Type of connection cable            | Finely stranded<br>Solid |
| Width                               | 103 mm                   |
| Width, inches                       | 4.09 in                  |
| Length                              | 12 mm                    |
| Length in inches                    | 0.48 in                  |
| Mounting depth                      | 72 mm                    |
| Mounting depth in inches            | 2.76 in                  |
| Weight                              | 110 g                    |
| Weight                              | 0.24 lb                  |

### Mounting / Installation

|                                      |                   |
|--------------------------------------|-------------------|
| Earthing connection cross-section    | 4 mm <sup>2</sup> |
| Earthing conductor cross-section AWG | 12 AWG            |
| Connection type                      | 2 PA              |
| Min. torque, Nm                      | 0.5 N · m         |
| Min. torque, lb/in                   | 4.43 lb/in        |
| Max. torque, Nm                      | 0.6 N · m         |
| Max. torque, lb/in                   | 5.31 lb/in        |

### Technical Drawings – Subject to Alterations







Image F

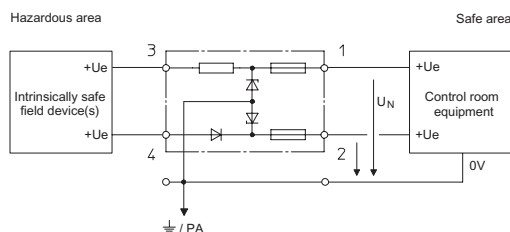


Dual-channel safety barrier, safety barrier potential:  
+ / evaluation barrier potential: +

9002/13-280-093-001 Art. No. 158852


### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



mounted on the NS 35/15 mounting rail



mounted on the NS 32 mounting rail with adaptor and clamping base made of moulded material



installed on mounting plate with adaptor

## Accessories

### Terminal block




Phoenix Contact terminal block UT 4-PE  
Phoenix Contact terminal block UT 6-PE

Art. No.

113057

113058

### Adaptor




The adaptor enables a safety barrier to be installed on a clamping base (Art. No. 165283) or mounting plate from a previous series.

Art. No.

158826

### Clamping base, moulded material




Enables the safety barrier to be mounted on a G-rail. The safety barrier is mounted using the adaptor (Art. No. 158826).

Art. No.

165283

### Fuse holder



The fuse holder is snapped onto the side of a safety barrier and can be equipped with up to five back-up fuses (replacement).

Art. No.

158834

## Spare Parts

### Back-up fuse




For all series 9001, 9002 and 9004 safety barriers  
Packaging unit: 5 pieces

Art. No.

158964

9002/13-280-093-001    Art. No. 158852

| Label carrier                                                                    |                                 | Art. No. |
|----------------------------------------------------------------------------------|---------------------------------|----------|
|  | Transparent cover for the label | 158977   |

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.