


CMP-40C2K Art. No. 243509



- Ex e cable gland for all armoured cables: SWA, wire-braid and tape armouring made of steel or aluminium
- Safety thanks to flood seal with integral protection, controlled outer load retention seal
- Internationally certified in accordance with IECEx and ATEX, EMC-tested

MY R. STAHL C2KA

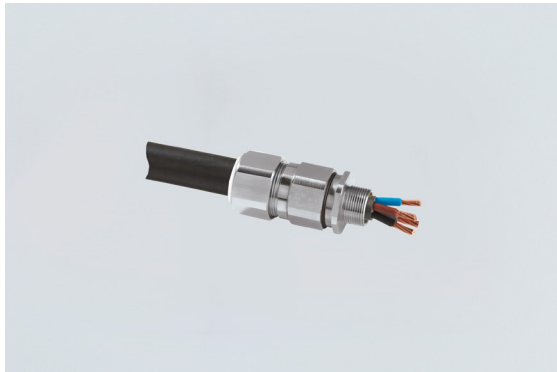

Series C2K metal Ex e cable glands are suitable for all types of armoured cables, i.e. for SWA, wire-braid and tape armouring made of steel or aluminium. They have a multifunctional holder for the armouring and various seals. They are also EMC-tested.

### Technical Data


| Explosion Protection                |   |
|-------------------------------------|---|
| Ex version                          | Ex e & Ex ta  |
| Application range (zones)           | 1, 2, 20, 21, 22  |
| IECEX gas certificate               | IECEX CML 18.0180X  |
| IECEX gas explosion protection      | Ex eb IIC Gb  |
| IECEX dust certificate              | IECEX CML 18.0180X  |
| IECEX dust explosion protection     | Ex ta IIIC Da   |
| ATEX gas certificate                | CML 18ATEX1323X   |
| ATEX gas explosion protection       | II 2 G Ex eb IIC Gb   |
| ATEX dust certificate               | CML 18ATEX1323X   |
| ATEX dust explosion protection      | II 1 D Ex ta IIIC Da  |
| Notes                               | The product certificates can be downloaded from the manufacturer's homepage ( <a href="http://www.cmp-products.com">www.cmp-products.com</a> )                                    |
| Ambient Conditions                  |   |
| Ambient temperature                 | -60 °C ... +130 °C  |
| Mechanical Data                     |   |
| Version                             | 40  |
| Degree of protection (IP)           | IP66  |
| Degree of protection note           | IP67 and IP68 mounting according to the specifications of the manufacturer, CMP. The specified degrees of protection are only fulfilled if CMP installation accessories are used. |
| IP degree of protection (IEC 60079) | IP66  |
| Sealing material                    | SOLO LSF  |
| Sealing ring material               | Viton   |
| Material                            | Nickel-plated brass   |
| Halogen-free                        | Yes   |
| Clamping range                      | 27.9 – 40.4 mm  |
| Armouring type 2                    | Without lead sheath   |
| Clamping range                      | 27.9 ... 40.4 mm  |
| Construction type                   | BS 6121, IEC/EN 62444   |

CMP-40C2K    Art. No. 243509

Mechanical Data

|                             |                  |
|-----------------------------|------------------|
| Width across corners        | 60.5 mm          |
| Width across flats          | 55 mm            |
| Thread size                 | M40              |
| Thread length               | 15 mm            |
| Thread pitch                | 1,5              |
| Thread standard             | metric           |
| Gland size                  | 40               |
| Grooved cone                | 0.4 ... 1.6 mm   |
| Stepped cone                | 1.6 ... 2 mm     |
| Inner sheath                | 32.2 mm          |
| Outer sheath                | 27.9 ... 40.4 mm |
| Protrusion length           | 75 mm            |
| Impact strength (IEC 60079) | 7 J              |
| Impact strength             | 20 J             |
| PVC boot                    | PVC15            |
| Weight                      | 750 g            |
| Weight                      | 1.65 lb          |

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



- A = Max. inner sheath
- B = Outer sheath
- C = Thread size
- D = Width across corners
- D = Width across flats
- E = Thread length
- F = Protrusion length

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.