

Isolators

Transmitter supply unit

Ex i field circuit

9160/15-11-10s Art. No. 248722



- Can be used universally for 2- and 3-wire transmitters and mA sources (4-wire transmitters)
- High accuracy
- For use up to SIL 2, special variant up to SIL 3 (IEC/EN 61508)

MY R. STAHL 9160A



Series 9160 Ex i transmitter supply units are used for the intrinsically safe operation of 2- and 3-wire transmitters or intrinsically safe mA sources such as 4-wire transmitters. The device transmits HART signals in both directions. The range includes one- and two-channel devices, as well as a variant for signal duplication. Special versions are available for lower output voltages and SIL 3.

Technical Data

Explosion Protection

Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEX gas certificate	IECEX BVS 08.0050 X
IECEX gas certificate	IECEX BVS 08.0050 X
IECEX gas explosion protection	Ex nA [ia Ga] IIC T4 Gc
IECEX dust certificate	IECEX BVS 08.0050 X
IECEX dust explosion protection	[Ex ia Da] IIIC
IECEX firedamp certificate	IECEX BVS 08.0050 X
IECEX firedamp protection	[Ex ia Ma] I
ATEX gas certificate	DMT 03 ATEX E 010 X
ATEX gas certificate	DMT 03 ATEX E 010 X
ATEX gas explosion protection	⊕ II 3 (1) G Ex nA [ia Ga] IIC T4 Gc
ATEX dust certificate	DMT 03 ATEX E 010 X
ATEX dust explosion protection	⊕ II (1) D [Ex ia Da] IIIC
ATEX firedamp certificate	DMT 03 ATEX E 010 X
ATEX firedamp protection	⊕ I (M1) [Ex ia Ma] I
FMus certificate	FM16US0122X
cFM certificate	FM16CA0067X
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, nA nC Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, [Ex ia] IIC T4 Mounting vert. at Ta = 70°C , or horizontal Ta = 60°C See Doc. 91 606 01 31 1
Certificates	ATEX (BVS), China (NEPSI), IECEX (BVS), SIL (exida)
Ship approval	CCS, EU RO MR (DNV)
Declaration of conformity	ATEX (EUK), China (CCC)

Safety Data

Max. voltage U_o	15.5 V						
Max. current I_o	98 mA						
Max. power P_o	356 mW						
Max. permissible external capacity C_o for IIC	0.508 μ F						
Max. permissible external inductance L_o for IIC	4 mH						
Max. permissible external capacity C_o for IIB	3.11 μ F						
Max. permissible external inductance L_o for IIB	18 mH						
Max. permissible external capa.IIA	12.5 μ F						
Max. permissible external inductance L_o for IIA	28 mH						
Max. permissible external capacity C_o for IIIC	3.11 μ F						
Max. permissible external inductance L_o for IIIC	18 mH						
Max. permissible external capacity C_o for I	14.5 μ F						
Max. permissible external inductance L_o for I	38 mH						
Max. voltage U_o isolation amplifier	4.1 V						
Max. current I_o isolation amplifier	negligible						
Max. power P_o isolation amplifier	negligible						
Max. voltage U_i isolation amplifier	30 V						
Max. current I_i isolation amplifier	100 mA						
Max. power P_i isolation amplifier	internally limited						
Internal capacitance isolation amplifier	Negligible						
Internal inductance L_i isolation amplifier	Negligible						
Max. voltage U_i	30 V						
Max. current I_i note	Internally limited						
Max. power P_i	100 mW						
Internal capacitance	Negligible						
Internal inductance	Negligible						
Safety-related max. voltage	253 V AC						
Intrinsically safe limiting values inductance L_o /capacitance C_o	Jointly connectable inductance L_o /capacitance C_o						
IIC	L_o [mH]	4 mH	2 mH	0.500 mH	0.200 mH		
	C_o [μ F]	0.021 μ F	0.032 μ F	0.045 μ F	0.508 μ F		
IIB	L_o [mH]	18 mH	2 mH	0.500 mH	0.200 mH		
	C_o [μ F]	0.790 μ F	2.100 μ F	3 μ F	3.110 μ F		
IIA	L_o [mH]	28 mH	20 mH	5 mH	1 mH	0.200 mH	0.02 mH
	C_o [μ F]	1 μ F	1.300 μ F	2.200 μ F	3.600 μ F	4.700 μ F	5.20 μ F
IIIC	L_o [mH]	18 mH	2 mH	0.500 mH	0.200 mH		
	C_o [μ F]	0.790 μ F	2.100 μ F	3 μ F	3.110 μ F		

I	L _o [mH]	38 mH	20 mH	5 mH	1 mH	0.200 mH	0.02 mH
	C _o [μF]	1.200 μF	1.800 μF	2.900 μF	4.600 μF	6.400 μF	6.80 μF

Functional Safety

SIL	2
HFT	0
SFF	85%
Lambda SD	0 FIT
Lambda SU	0 FIT
Lambda DD	163 FIT
Lambda DU	28 FIT
PFD _{avg} at T _{proof} 1 year	2,29E-04
PFD _{avg} at T _{proof} 2 years	3,38E-04
PFD _{avg} at T _{proof} 5 years	6,64E-04

Electrical Data

Number of channels	1
Transmitter feed operation	Yes
Isolation amplifier operation	Yes
LFD relay	No
Communication signal	HART, 0.5 to 10 kHz

Auxiliary Power

Auxiliary power	24 V DC
Auxiliary power nominal voltage	24 V DC
Auxiliary power voltage range	18 to 31.2 V
Voltage range residual ripple	≤ 3,6 V _{SS}
Nominal current	75 mA
Max. power dissipation	1.4 W
Power consumption	1.8 W
Polarity reversal protection	Yes
Undervoltage monitoring	Yes
Operation indication	Green "PWR" LED

Galvanic Isolation

Test voltage as per standard	EN IEC 60079-11
Ex i input to output	1.5 kV AC
Ex i input to auxiliary power	1.5 kV AC
Ex i input to fault message contact	1.5 kV AC
Test voltage as per standard	EN 50178
Output to auxiliary power	350 V AC

Input

Input function	Isolation amplifier Transmitter power unit
Input	0/4 ... 20 mA low voltage
Input signal	0/4 to 20 mA with HART
Function range input	0 ... 24 mA
Max. input current, mA sources	50 mA
Input for open-circuit voltage U _a	≤ 26 V
Short-circuit current	≤ 35 mA

Input

Supply voltage for transmitter	≥ 9 V at 20 mA
Input resistance	≤ 100 ohm

Output

Output	0/4 to 20 mA with HART
Output signal	0/4 to 20 mA with HART
Function range output	0 – 24 mA
Output A	0/4 to 20 mA
Behaviour of the output	= input signal
Output current at I _e =0	0 mA
Output residual ripple	≤ 40 μA _{eff}
Load resistance R _L	0 ... 600 Ω (terminal 1+/2- resp. 5+/6-) 0 ... 379 Ω (terminal 3+/2- resp. 4+/6-) (With internal 221 ohm resistor for HART)
Settling time 10-90%	≤ 100 μs
Deviations / error note	Information in % of the measuring range (20 mA) at U _N , 23 °C
Deviation	≤ 0,1 %
Temperature influence error limits	≤ 0.05% / 10 K

Device Specific Data

Operating status LED designation	PWR
Operating conditions LED colour	green

Ambient Conditions

Ambient temperature	-20 °C ... 70 °C (Single device) -20 °C ... 60 °C (Group assembly)
Ambient temperature	-4 °F ... +158 °F (Single device) -4 °F ... +140 °F (Group assembly)
Note	Installation conditions influence the ambient temperature. Please observe the "Cabinet installation guide".
Storage temperature	-40 °C ... 80 °C
Storage temperature	-40 °F ... +176 °F
Maximum relative humidity	95%
Use at the height of	< 2000 m
Max. operating altitude	2000 m
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 For use in industrial areas; NAMUR NE 21

Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Connection cross-section	0.2 to 2.5 mm ² flexible 0.25 to 2.5 mm ² flexible with core end sleeve
Grid dimension	17.6 mm
Width	17.6 mm
Width, inches	0.69 in
Height	114.5 mm
Height in inches	4.51 in


Mechanical Data

Length	128 mm
Length in inches	5.04 in
Weight	195 g
Weight	0.43 lb


Mounting / Installation

Mounting type	DIN rail NS35/15, NS35/7.5
Mounting orientation	Vertical Horizontal
Connection type	Screw terminal
Min. rigid conductor cross section	0.2 mm ²
Max. rigid conductor cross section	2.5 mm ²
Min. flex conductor cross section	0.2 mm ²
Max. flex conductor cross section	2.5 mm ²
Connection cross-section AWG	24 ... 14

Technical Drawings – Subject to Alterations

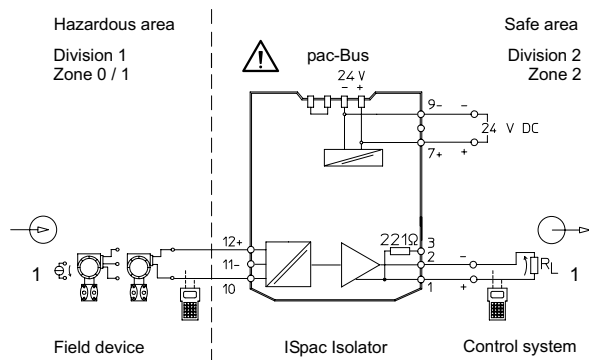

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

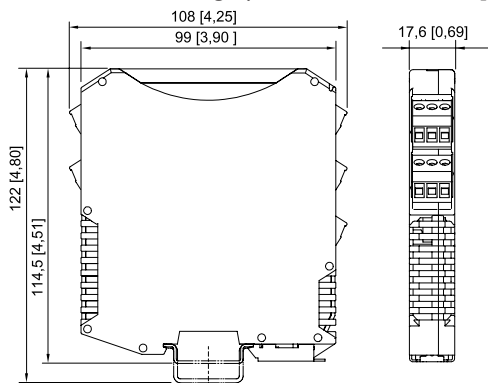

ISpac Series 9143, 9146, 9147, 9160, 9162, 9163, 9165, 9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193, ISbus Series 9412 with screw terminal

Accessories

Transparent cover

Art. No.


Isolators


Transmitter supply unit


Ex i field circuit

9160/15-11-10s Art. No. 248722




	For 91xx ISpac modules Yellow, transparent Clear identification of the device for SIL applications. (Packaging unit: 10 pieces)	200914
--	--	--------


pac-Bus		Art. No.
	Wiring auxiliary power and collective error message	160731


Terminal set for pac-Bus		Art. No.
	For the supply of 24 V DC auxiliary power via terminals (alternative to using the supply module 9193/21-11-11), with jumper for error message chain for ISpac module 91xx	160730

Spare Parts


Screw terminal		Art. No.
-----------------------	--	-----------------


	3-pole plug, screw connector thread: M3 stripping length: 7 mm colour: green	112817
---	---	--------

	3-pole plug, screw connector thread: M3 stripping length: 7 mm colour: black	112816
--	---	--------


	3-pole plug, screw connector thread: M3 stripping length: 7 mm colour: blue	112818
--	--	--------


Screw terminal with test tap		Art. No.
-------------------------------------	--	-----------------

	3-pole plug with test tap, screw connector thread: M3 stripping length: 7 mm colour: black	113005
--	---	--------

	3-pole plug with test tap, screw connector thread: M3 stripping length: 7 mm colour: blue	113004
--	--	--------

Spring clamp terminal		Art. No.
------------------------------	--	-----------------

	3-pole plug with test tap, spring clamp connection stripping length: 10 mm colour: green	112825
--	--	--------

	3-pole plug with test tap, spring clamp connection stripping length: 10 mm colour: black	112824
--	--	--------

Isolators

Transmitter supply unit

Ex i field circuit

9160/15-11-10s Art. No. 248722



3-pole plug with test tap, spring clamp connection
stripping length: 10 mm
colour: blue

112826

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.