Components for system solutions

Empty enclosure Screw-on cover 8151/0-126D-3311 Art. No. 324617





- · Ex e enclosure series made of stainless steel
- · Ideally suited for terminal boxes
- 14 different standard sizes
- · Cover with screws or with hinge
- Available as Ex e empty enclosure or customised as Ex e terminal box

MY R. STAHL 8151A



Ex e enclosure made of high-quality 1.4404 stainless steel, specially designed for use as a terminal box. 14 standard sizes with 1 mm/1.2mm thickness, optionally with screw-on cover or hinge with screws or cam locks, offer great flexibility for a wide range of applications. Can be customised with terminal blocks from various manufacturers, as well as a large selection of cable glands, cable entries, mounting and flange plates.

The enclosures in the 8151 series are available as empty enclosures with U-certification or as fully certified Ex e terminal boxes.

| Technical Data | Тес | hnio | cal C |)ata |
|-----------------------|-----|------|-------|------|
|-----------------------|-----|------|-------|------|


| Explosion Protection | | |
|---------------------------------------|--|--|
| Area of application | European Union (ATEX) IECEx | |
| Application range (zones) | 1, 2, 21, 22 | |
| IECEx gas certificate | IECEx BVS 24.0002 U | |
| IECEx gas explosion protection | Ex eb IIC Gb | |
| IECEx dust certificate | IECEx BVS 24.0002 U | |
| IECEx dust explosion protection | Ex tb IIIC Db | |
| ATEX gas certificate | BVS 24 ATEX E 001 U | |
| ATEX gas explosion protection | ௐ II 2 G Ex eb IIC Gb | |
| ATEX dust certificate | BVS 24 ATEX E 001 U | |
| ATEX dust explosion protection | | |
| Certificates | ATEX (BVS), IECEx (BVS) | |
| Ambient Conditions | | |
| Ambient temperature | -60 °C +135 °C | |
| Ambient temperature | -76 °F +275 °F | |
| Mechanical Data | | |
| Degree of protection (IP) (IEC 60529) | IP66 | |
| Enclosure material | Stainless steel 1.4404, Brush finished | |
| Silicone-free | No | |
| Cover | Screw-on cover | |
| Cover fixing type | With captive screws | |
| Cover thickness | 1.2 mm | |
| Cover thickness in inches | 0.0047 in | |
| Wall thickness | 1.2 mm | |




Mechanical Data

| inoonanioai Bata | |
|---|--------------|
| Wall thickness in inches | 0.0047 in |
| Width | 760 mm |
| Width, inches | 29.92 in |
| Height | 760 mm |
| Height in inches | 29.92 in |
| Depth | 230 mm |
| Depth in inches | 9.05 in |
| Impact strength (IEC 60079) | 7 J |
| Impact strength (IEC 62262) | IK09 |
| Packaging unit | 1 |
| Weight | 19.9 kg |
| Weight | 43.87 lb |
| Mounting / Installation | |
| Tightening torque of cover screw 1 | 4.5 N · m |
| Tightening torque of cover screw 1 lbf in | 39.83 lbf in |
| | |

Dimensional Drawings (All Dimensions in mm [inches]) - Subject to Alterations






Mounting bracket below

Mounting bracket top

Components for system solutions

Empty enclosure Screw-on cover 8151/0-126D-3311 Art. No. 324617

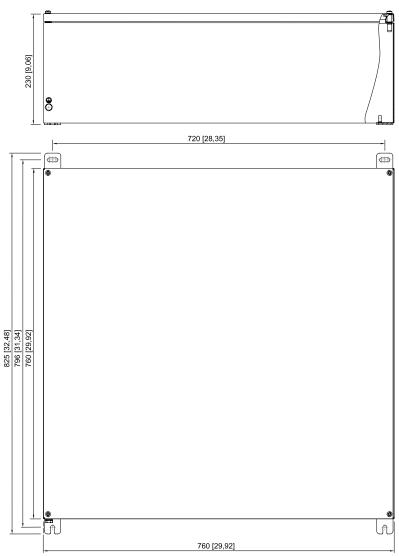

8151/0-126A-3311

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.

