Components for system solutions

Empty enclosure Hinge / screw-on cover

8151/0-096A-3331 Art. No. 324641





- · Ex e enclosure series made of stainless steel
- Ideally suited for terminal boxes
- · 14 different standard sizes
- · Cover with screws or with hinge
- Available as Ex e empty enclosure or customised as Ex e terminal box

MY R. STAHL 8151A



Ex e enclosure made of high-quality 1.4404 stainless steel, specially designed for use as a terminal box. 14 standard sizes with 1 mm/1.2mm thickness, optionally with screw-on cover or hinge with screws or cam locks, offer great flexibility for a wide range of applications. Can be customised with terminal blocks from various manufacturers, as well as a large selection of cable glands, cable entries, mounting and flange plates.

The enclosures in the 8151 series are available as empty enclosures with U-certification or as fully certified Ex e terminal boxes.

Technical Data

Explosion Protection			
Area of application	European Union (ATEX)		
	IECEx		
Application range (zones)	1, 2, 21, 22		
IECEx gas certificate	IECEx BVS 24.0002 U		
IECEx gas explosion protection	Ex eb IIC Gb		
IECEx dust certificate	IECEx BVS 24.0002 U		
IECEx dust explosion protection	Ex tb IIIC Db		
ATEX gas certificate	BVS 24 ATEX E 001 U		
ATEX gas explosion protection			
ATEX dust certificate	BVS 24 ATEX E 001 U		
ATEX dust explosion protection			
Certificates	ATEX (BVS), IECEx (BVS)		
Ambient Conditions			
Ambient temperature	-60 °C +135 °C		
Ambient temperature	-76 °F +275 °F		
Mechanical Data			
Degree of protection (IP) (IEC 60529)	IP66		
Enclosure material	Stainless steel 1.4404, Brush finished		
Silicone-free	No		
Cover	Hinge / screw-on cover		
Cover fixing type	With captive screws, With side C hinge		
Cover thickness	1 mm		
Cover thickness in inches	0.0039 in		
Wall thickness	1 mm		

Components for system solutions




Empty enclosure
Hinge / screw-on cover

8151/0-096A-3331 Art. No. 324641


MA	chai	nıcal	Data
IAIC	onai	ıııvaı	Data


Wall thickness in inches	0.0039 in
Width	360 mm
Width, inches	14.17 in
Height	727 mm
Height in inches	28.62 in
Depth	230 mm
Depth in inches	9.05 in
Impact strength (IEC 60079)	7 J
Impact strength (IEC 62262)	IK09
Packaging unit	1
Weight	9.5 kg
Weight	20.94 lb
Mounting / Installation	
Tightening torque of cover screw 1	4.5 N · m
Tightening torque of cover screw 1 lbf in	39.83 lbf in

Dimensional Drawings (All Dimensions in mm [inches]) - Subject to Alterations








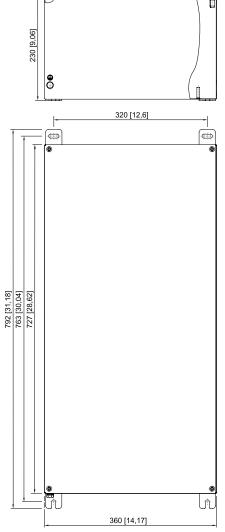

8151/0-096A-3331

Components for system solutions





We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.