


## Remote I/O

IS1 RIO standard encl. Zone 2 With shield bus

With cable duct and power terminals

7145/54-0600-0600-0230 Art. No. 260146

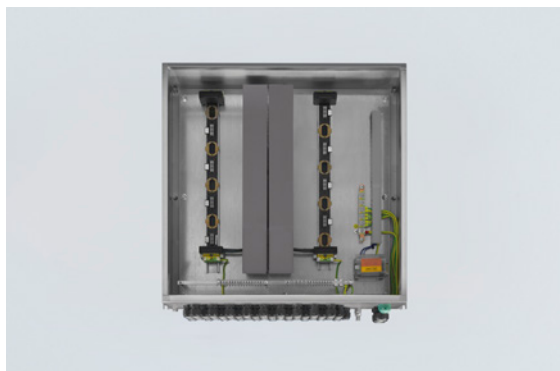

- Short delivery times
- Can be used in Zone 2 without acceptance testing or certification
- Ready for use, prefabricated with entries, BusRails, connection terminals, etc.
- Modifications, extensions and customer-specific adaptations are possible

### MY R. STAHL 7145F



With the IS1+ standard enclosures for Zone 2, we offer you a variety of prefabricated field enclosures made from 1.4301 stainless steel (V2A). They include all entries, BusRails, cable ducts and connection terminals for auxiliary power.

Once the IS1+ components (available separately) have been installed, the enclosures can be used in Zone 2 without acceptance testing, and they fulfil the requirements of EN 61439.

## Technical Data

### Explosion Protection

Application range (zones)	2
IECEX gas certificate	IECEX TUR 15.0027
IECEX gas explosion protection	Ex ec ia ib [ia Ga, ib] IIC T4 Gc
ATEX gas certificate	TÜV 18 ATEX 8178
ATEX gas explosion protection	Ex II 3 (1) G Ex ec ia ib [ia Ga, ib] IIC T4 Gc
Certificates	ATEX (TUR), IECEX (TUR), India (PESO)
Declaration of conformity	ATEX (EUK)
Installation	Zone 2
Further information	See the operating instructions and certificates for the enclosures and IS1+ modules

### Electrical Data

Applicable IS1+ CPM modules	9440/15-01-11-C1198 (Modbus RTU)
Applicable IS1+ CPU modules	9442/35-10-00 (multi-protocol: PROFIBUS DP V1 HART, PROFIBUS DP V1 HART for PNO redundancy, Modbus TCP, PROFINET, EtherNet/IP)
Applicable IS1+ CPU modules note	CPU together with 9445/35 power module and 9496/35 socket
Usable IS1+ power modules	9445/35
Usable IS1+ base	9496/35-04
Usable IS1+ I/O modules	9468/33 9470/33 9475/33 9482/33 9469/35 9471/35 9472/35 9477/15
Applicable IS1+ modules note	The IS1+ modules must be installed according to the corresponding operating instructions for the modules.

### Auxiliary Power

Auxiliary power rated operating voltage	24 V DC (20 to 35 V DC)
---	-------------------------

# Remote I/O

IS1 RIO standard encl. Zone 2 With shield bus

With cable duct and power terminals

7145/54-0600-0600-0230 Art. No. 260146



## Auxiliary Power

Auxiliary power nominal current	Max. 4 A @ 24 V DC
Auxiliary power rated current	Depending on the installed IS1+ modules (see corresponding data sheet)

## Device Specific Data

Max. number of analogue I/O signals	56
Max. number of digital I/O signals	112
Max. internal power dissipation	40 W
IS1+ BusRail	1 x BusRail for 8 slots, with 2 end pieces (beginning + end), 1 BusRail extension
Cable duct	2 x Grey (100 x 60 mm); 1 x Grey (25 x 25 mm)
Shield bus	2 x KLBÜ 3...8 30 x AK4
Front door	1 x opening to the left 5 x cam lock

## Ambient Conditions

Ambient temperature	-40°C ... +55°C
Ambient temperature	-4°F ... +122°F
Storage temperature	-40°C ... +80°C
Storage temperature	-40°F ... +176°F
Note	Also see the technical data of the IS1+ modules in the relevant data sheets

## Mechanical Data

Connection auxiliary power	Screw connector 0.2 to 10 mm <sup>2</sup> (4 x UT6; 2 x UT6-PE)
PE connection version	External M8 PE connection
PE connection clamping range	10 – 25 mm <sup>2</sup>
Degree of protection (IP) (IEC 60529)	IP65
Enclosure material	Stainless steel 1.4301, (V2A, AISI 304) Brush finished
Sealing material	Silicone foam gasket
Silicone-free	No
Wall thickness	2 mm
Connection cross-section	0.2 to 10 mm <sup>2</sup>
Dimensions (WxHxD)	600 x 600 x 230 mm
Width	600 mm
Width, inches	23.62 in
Height	600 mm
Height in inches	23.62 in
Depth	230 mm
Depth in inches	9.06 in
Weight	35 kg
Weight	77.16 lb

## Mounting / Installation

Mounting orientation	Horizontal Vertical
Connection type	Screw connector

## Components

Built-in unit 1	1 x BusRail for 8 slots (1 x CPM, 7 x I/O – modules)
-----------------	---

# Remote I/O



IS1 RIO standard encl. Zone 2 With shield bus



With cable duct and power terminals

7145/54-0600-0600-0230 Art. No. 260146

## Components

Auxiliary power cable entries	2 x Black cable gland Polyamide, type 8161/7 M32 Ø 9 ... 21 mm
Cable entries signals	58 x Black cable gland Polyamide, type 8161/7 M20 Ø 4 ... 13 mm
Breather	1 x Breather, green, Polyamide, type 8162 M25 x 1,5
Type of terminals 1	4 x UT6
Type of terminals PE 1	2 x UT6-PE
Earth rail	10 x 3 Zinc galvanised (not insulated) (1x)

## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



1 x BusRail for 8 slots

Item no. 260146

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.