

## Remote I/O

IS1 RIO standard encl. Zone 2 With shield bus

With cable duct and power terminals

7145/54-0800-1000-0300 Art. No. 260149

STAHL



- Short delivery times
- Can be used in Zone 2 without acceptance testing or certification
- Ready for use, prefabricated with entries, BusRails, connection terminals, etc.
- Modifications, extensions and customer-specific adaptations are possible

MY R. STAHL 7145F



With the IS1+ standard enclosures for Zone 2, we offer you a variety of prefabricated field enclosures made from 1.4301 stainless steel (V2A). They include all entries, BusRails, cable ducts and connection terminals for auxiliary power.

Once the IS1+ components (available separately) have been installed, the enclosures can be used in Zone 2 without acceptance testing, and they fulfil the requirements of EN 61439.

## Technical Data

Explosion Protection	
Application range (zones)	2
IECEX gas certificate	IECEX TUR 15.0027
IECEX gas explosion protection	Ex ec ia ib [ia Ga, ib] IIC T4 Gc
ATEX gas certificate	TÜV 18 ATEX 8178
ATEX gas explosion protection	Ex II 3 (1) G Ex ec ia ib [ia Ga, ib] IIC T4 Gc
Certificates	ATEX (TUR), IECEX (TUR), India (PESO)
Declaration of conformity	ATEX (EUK)
Installation	Zone 2
Further information	See the operating instructions and certificates for the enclosures and IS1+ modules
Electrical Data	
Applicable IS1+ CPM modules	9440/15-01-11-C1198 (Modbus RTU)
Applicable IS1+ CPU modules	9442/35-10-00 (multi-protocol: PROFIBUS DP V1 HART, PROFIBUS DP V1 HART for PNO redundancy, Modbus TCP, PROFINET, EtherNet/IP)
Applicable IS1+ CPU modules note	CPU together with 9445/35 power module and 9496/35 socket
Usable IS1+ power modules	9445/35
Usable IS1+ base	9496/35-04
Usable IS1+ I/O modules	9468/33 9470/33 9475/33 9482/33 9469/35 9471/35 9472/35 9477/15
Applicable IS1+ modules note	The IS1+ modules must be installed according to the corresponding operating instructions for the modules.
Auxiliary Power	
Auxiliary power rated operating voltage	24 V DC (20 to 35 V DC)

# Remote I/O

IS1 RIO standard encl. Zone 2 With shield bus

With cable duct and power terminals

7145/54-0800-1000-0300 Art. No. 260149



## Auxiliary Power

Auxiliary power nominal current	Max. 4 A @ 24 V DC
Auxiliary power rated current	Depending on the installed IS1+ modules (see corresponding data sheet)

## Device Specific Data

Max. number of analogue I/O signals	120
Max. number of digital I/O signals	210
Max. internal power dissipation	90 W
IS1+ BusRail	1 x BusRail for 16 slots, with 2 end pieces (beginning + end), 1 BusRail extension
Cable duct	2 x Grey (100 x 100 mm); 1 x Grey (60 x 25 mm)
Shield bus	2 x KLBÜ 3...8
Front door	1 x opening to the left 6 x cam lock

## Ambient Conditions

Ambient temperature	-40°C ... +55°C
Ambient temperature	-40°F ... +122°F
Storage temperature	-40°C ... +80°C
Storage temperature	-40°F ... +176°F
Note	Also see the technical data of the IS1+ modules in the relevant data sheets

## Mechanical Data

Connection auxiliary power	Screw connector 0.2 to 10 mm <sup>2</sup> (4 x UT6; 2 x UT6-PE)
PE connection version	External M8 PE connection
PE connection clamping range	10 – 25 mm <sup>2</sup>
Degree of protection (IP) (IEC 60529)	IP65
Enclosure material	Stainless steel 1.4301, (V2A, AISI 304) Brush finished
Sealing material	Silicone foam gasket
Silicone-free	No
Wall thickness	2 mm
Connection cross-section	0.2 to 10 mm <sup>2</sup>
Dimensions (WxHxD)	800 x 1000 x 300 mm
Width	800 mm
Width, inches	31.5 in
Height	1000 mm
Height in inches	39.37 in
Depth	300 mm
Depth in inches	11.81 in
Weight	70 kg
Weight	154.32 lb

## Mounting / Installation

Mounting orientation	Horizontal Vertical
Connection type	Screw connector

## Components

Built-in unit 1	1 x BusRail for 16 slots (1 x CPM, 15 x I/O – modules)
-----------------	---

# Remote I/O

IS1 RIO standard encl. Zone 2 With shield bus

With cable duct and power terminals


7145/54-0800-1000-0300 Art. No. 260149



## Components

Auxiliary power cable entries	2 x Black cable gland Polyamide, type 8161/7 M32 Ø 9 ... 21 mm
Cable entries signals	130 x Black cable gland Polyamide, type 8161/7 M20 Ø 4 ... 13 mm
Breather	1 x Breather, green, Polyamide, type 8162 M25 x 1,5
Type of terminals 1	4 x UT6
Type of terminals PE 1	2 x UT6-PE
Earth rail	10 x 3 Zinc galvanised (not insulated) (1x)

## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

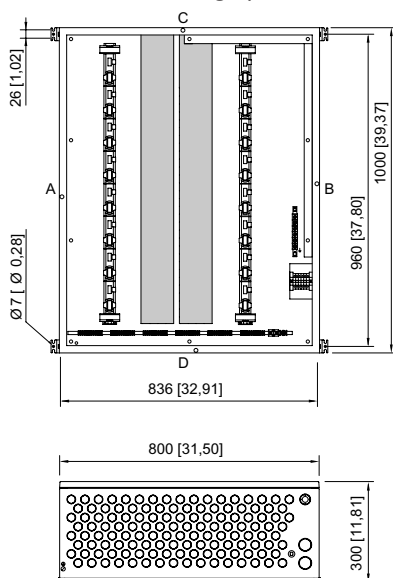

1 x BusRail for 16 slots

Item no. 260149

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.