Load disconnect switches and motor starters
Circuit protection assembly MCCB

8150/5-V50-03-060-480-50-000-00-000 Art. No. 330451



- Lightweight construction
- Stainless steel 1.4404 (AISI 316L), brush finished for corrosion resistance
- Suitable for low ambient temperatures
- Enclosure type 3, 4, 4X, IP66
- No conduit seal required – Cable gland entry and sealed circuit breaker enclosure
- International approvals for worldwide use

MY R. STAHL **8150T**

V50 Series circuit breaker assemblies are designed for hazardous locations and harsh environments, featuring a corrosion-resistant stainless steel enclosure and dependable circuit protection. Ideal for installation near control panels, motors, skids, and machinery, they combine molded case and miniature circuit breaker technology with high short-circuit switching capacity. The modular design enables easy expansion and maintenance, while ergonomic padlockable rotary actuators enhance operational and personnel safety. Supplied without preinstalled entries, the V50 provides flexible cable configuration and long-term reliability in demanding applications.

Technical Data

Explosion Protection	
Area of application	European Union (ATEX) IECEx USA Canada (CSA)
Application range (zones)	1, 2, 21, 22
IECEx gas certificate	IECEx PTB 09.0049
IECEx gas explosion protection	Ex db eb IIC T4 Gb
IECEx dust certificate	IECEx PTB 09.0049
IECEx dust explosion protection	Ex tb IIIC T95 °C Db
ATEX gas certificate	PTB 09 ATEX 1109
ATEX gas explosion protection	II 2 G Ex db eb IIC T4 Gb
ATEX dust certificate	PTB 09 ATEX 1109
ATEX dust explosion protection	II (2) D Ex tb IIIC T95 °C Db
Certificate FMus	FM24US0069X
Marking FMus	Cl.I, Div.2 Gps.A,B,C,D, T4 Cl.II, Cl.III, Div.1, Div. 2 Gps.E,F,G, T4 Class I, Zone 1 AEx db eb IIC T4 Gb -35°C ≤ Ta ≤ +55°C Type 3, 4, 4x and IP66
cFM certificate	FM24CA0028X
Marking cFM	Cl.I, Div.2 Gps.A,B,C,D, T4 Cl.II, Cl.III, Div.1, Div. 2 Gps.E,F,G, T4 Ex db eb IIC T4 -35°C ≤ Ta ≤ +55°C Type 3, 4, 4x and IP66
Certificates	ATEX (PTB), Canada (FM), IECEx (PTB), USA (FM)


Load disconnect switches and motor starters
Circuit protection assembly MCCB

8150/5-V50-03-060-480-50-000-00-000 Art. No. 330451

Electrical Data	
AC rated operational voltage	600Y/347 & 480 V
Rated operating voltage DC	12 … 250 V
Rated operational current	60 A
Frequency	50 / 60 Hz
Rated switching capacity	10 kA
Electrical service life	8000
Mechanical service life	10^4
No. of poles	3-pole
Ambient Conditions	
Ambient temperature	-25 °C ... 55 °C
Ambient temperature	-13 °F ... 131 °F
Mechanical Data	
Degree of protection (IP) (IEC 60529)	IP66/IP2X
Enclosure material	Stainless steel 1.4404, (AISI 316L), brush finished
Connection cross-section	25 ... 95 mm²
Connection cross-section AWG	4 AWG
Seal	Silicone, foamed
Width	360 mm
Width, inches	14.17 in
Length	480 mm
Length in inches	18.89 in
Mounting depth	330 mm
Mounting depth in inches	12.99 in
Handle colour	Black
Protective collar colour	Black
Weight	23 kg
Weight	50.715 lb
Mounting / Installation	
Tightening torque	12.4 ... 20.3 N · m
Tightening torque lbf in	109.75 lbf in ... 179.67 lbf in
Tightening torque auxiliary contact	0.4 ... 0.6 N · m
Tightening torque auxiliary contact lbf in	3.5 lbf-in ... 5.3 lbf-in
Components	
Cable gland	without

8150/5-V50-03-060-480-50-000-00-000 Art. No. 330451

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

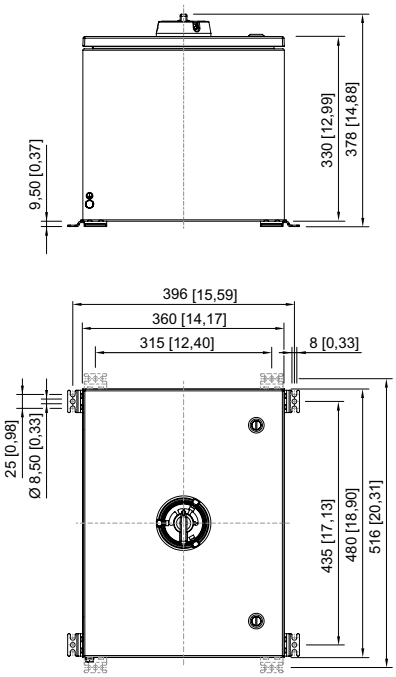

8150/5-V50-03-...-...-50-000-00-000

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.