

8405C6-5T-5 Art. No. 262957



- Various versions of ammeters, for Ex e enclosures
- Quick comparison of measured values using externally adjustable red pointer on the device
- Selection of various current measuring ranges

MY R. STAHL 8405B



R. STAHL Series 8405C6 ammeters are installed in enclosures with Ex e type of protection. They provide measured values for the current which can be quickly compared with the target values via a red pointer affixed on the outside. The devices use a moving iron movement with accuracy class 2.5.

### Technical Data

#### Explosion Protection

Area of application	European Union (ATEX) IECEX
Ex version	Ex e
Application range (zones)	1, 2
IECEX gas certificate	IECEX SIQ 17.0003U
IECEX gas explosion protection	Ex eb IIC T6 ... T4 Gb
IECEX firedamp certificate	IECEX SIQ 17.0003U
IECEX firedamp protection	Ex eb I Mb
ATEX gas certificate	SIQ 17 ATEX 192 U
ATEX gas explosion protection	Ex II 2 G Ex eb IIC T6 ... T4 Gb
ATEX firedamp certificate	SIQ 17 ATEX 192 U
ATEX firedamp protection	Ex I M2 Ex eb I Mb
Marking ULus	Class I, Zone 1 AEx eb IIC T6, T5, T4 Gb U Class I, Div. 2, Groups A,B,C,D, T6
Marking cUL	Class I, Zone 1 Ex eb IIC T6, T5, T4 Gb U Class I, Div. 2, Groups A,B,C,D, T6
Certificates	ATEX (SIQ), Brazil (ULB), IECEX (SIQ), Korea (KGS)
Explosion protection note	For product label, see scope of validity.

#### Electrical Data

Rated operational voltage AC UL	600 V
Rated insulation voltage	690 V
Frequency	50/60 Hz AC, DC
Rated operational current for AC	5 A
Rated operational current UL	5 A
Power dissipation	0.67 VA
Movement	0 to 5 A
Overload scale	5x

# Control and signalling devices

## Moving iron ammeter For transducer



8405C6-5T-5 Art. No. 262957

### Electrical Data

Overload capacity	50 x I <sub>N</sub> 1 sec
Frequency range	16 – 100 Hz AC, DC

### Ambient Conditions

Ambient temperature	-40 °C ... +40 °C (T6) -40 °C ... +55 °C (T5) -40 °C ... +70 °C (T4)
Ambient temperature	-40 °F ... +104 °F (T6) -40 °F ... +131 °F (T5) -40 °F ... +158 °F (T4)
Ambient temperature note	T6: -40 °C ≤ T <sub>amb</sub> ≤ +40 °C T5: -40 °C ≤ T <sub>amb</sub> ≤ +55 °C T4: -40 °C ≤ T <sub>amb</sub> ≤ +70 °C
Use at the height of	2000 m
Degree of pollution	3

### Mechanical Data

Version	for current transducer
Degree of protection (IP)	IP54
Degree of protection (IP) terminals	IP20
Enclosure material	Polycarbonate
Silicone-free	No
Pane material	Glass
Terminals	Screw connector (strain-relief clamp)
Max. USA finely stranded/flexible connection terminals	9 AWG
Connection cross-section	6 mm <sup>2</sup>
Min. connection cross section, solid	2,5 mm <sup>2</sup>
Max. connection cross section, solid	10 mm <sup>2</sup>
Min. connection cross-section, finely stranded	2,5 mm <sup>2</sup>
Max. connection cross-section, finely stranded	6 mm <sup>2</sup>
Stripping length	10 mm
Stripping length inch	0.39 in
Min. tightening torque	1.2 Nm
Min. tightening torque lb	10.62 lb
Max. tightening torque	1.5 Nm
Max. tightening torque lb	13.27 lb
Width	48 mm
Width, inches	1.88 in
Height	59.5 mm
Height in inches	2.34 in
Depth	48 mm
Depth in inches	1.88 in
Accuracy class	2.5
Weight	140 g
Weight	0.31 lb

8405C6-5T-5 Art. No. 262957

### Mounting / Installation

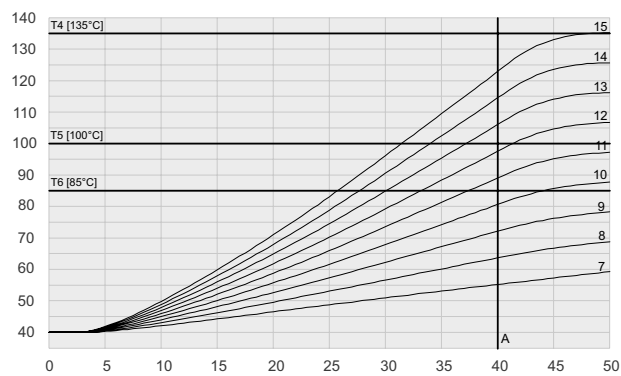
Mounting	Variant 1: Engage on DIN rail Variant 2: Mounting with screws on mounting plate (assembly accessories included in delivery)
Mounting orientation	Vertical
Max. USA solid connection terminals	7 AWG

### Components


Scale	without
-------	---------

### Technical Drawings – Subject to Alterations


8405/6-5T-5-Ta = 40°C




8405/6-5T-5-Ta = 50°C

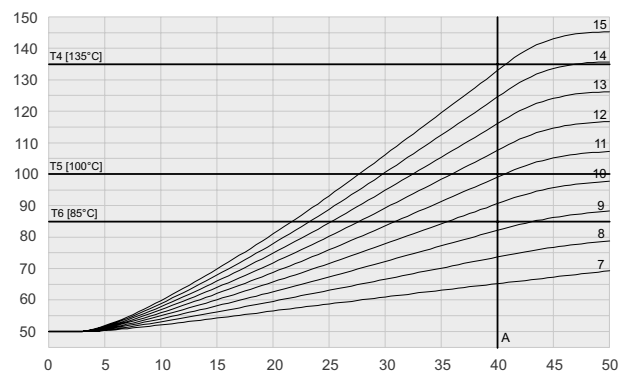

8405/6-5T-5-Ta = 55°C

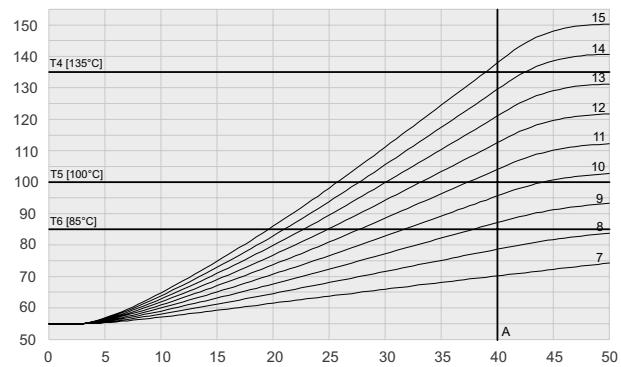

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

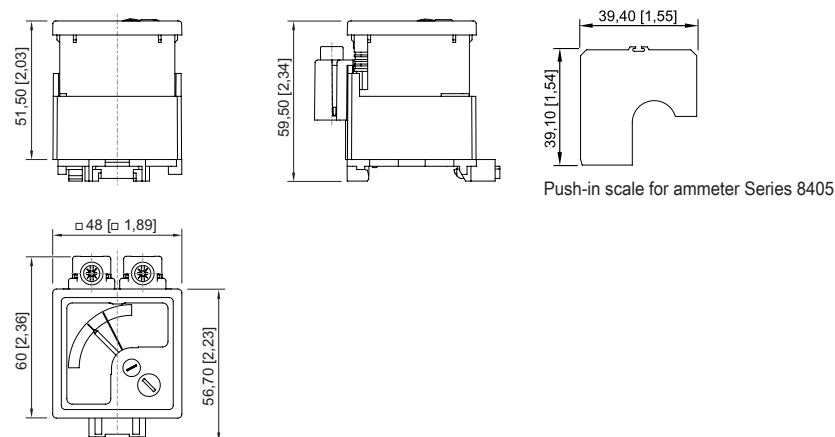







8405C6-5T-5 Art. No. 262957

**Spare Parts**

		Art. No.
<b>Calotte</b>		
	Calotte [2.52 x 2.52 inch]; IP66	155940


		Art. No.
	Overload: 5 times Scale: 0 to 1 A	265824
	Overload: 5 times Scale: 0 to 2 A	265826
	Overload: 5 times Scale: 0 to 5 A	265828
	Overload: 5 times Scale: 0 to 10 A	265830
	Overload: 5 times Scale: 0 to 15 A	265831
	Overload: 5 times Scale: 0 to 20 A	265834
	Overload: 5 times Scale: 0 to 25 A	265836
	Overload: 5 times Scale: 0 to 30 A	265838
	Overload: 5 times Scale: 0 to 40 A	265840
	Overload: 5 times Scale: 0 to 50 A	265852

8405C6-5T-5 Art. No. 262957

	Overload: 5 times Scale: 0 to 60 A	265854
	Overload: 5 times Scale: 0 to 75 A	265856
	Overload: 5 times Scale: 0 to 100 A	265858
	Overload: 5 times Scale: 0 to 150 A	265860
	Overload: 5 times Scale: 0 to 200 A	265862
	Overload: 5 times Scale: 0 to 250 A	265864
	Overload: 5 times Scale: 0 to 300 A	265866
	Overload: 5 times Scale: 0 to 400 A	265868
	Overload: 5 times Scale: 0 to 500 A	265870

**Push-in scale according to specification**

**Art. No.**

	<p><b>Mandatory information:</b>  <math>A_2</math> = measuring range starting value          B = measuring range end value          C = overload value          D = unit</p>	265261
------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.