



- The latest LED technology with a high luminous efficacy and a long service life
- Extremely high luminaire efficacy
- Luminous flux after 100,000 h still 90% of the starting luminous flux
- Optionally with DALI for controlling and monitoring the luminaire
- Optionally addressable for direct actuation of a common battery system

MY R. STAHL 6002D



The linear luminaire with Series 6002/4 LED is ideal for lighting surfaces at a mounting height of up to 10 m. It can also be used to illuminate equipment and objects, both inside and outside. The pole mounting sleeve accessory can be used to easily mount the luminaire on poles. Optionally, the luminaire can be equipped with addressable equipment. It can be used to control and monitor the luminaire for the common battery systems.

Technical Data

Explosion Protection	
Ex version	Yes
Application range (zones)	1, 2, 21, 22
IECEEx gas certificate	IECEEx IBE 14.0035
IECEEx gas explosion protection	Ex db eb ib op is IIC T4 Gb
IECEEx dust certificate	IECEEx IBE 14.0035
IECEEx dust explosion protection	Ex tb op is IIIC T100 °C Db
ATEX gas certificate	IBExU 14ATEX1088
ATEX gas explosion protection	Ex II 2 G Ex db eb ib op is IIC T4 Gb
ATEX dust certificate	IBExU 14ATEX1088
ATEX dust explosion protection	Ex II 2 D Ex tb op is IIIC T100 °C Db
Certificates and approvals	ATEX IECEEx
Certificates	ATEX (IBE), IECEEx (IBE), India (PESO)
Declaration of conformity	ATEX (EUK)
Electrical Data	
AC rated operational voltage	100 ... 240 V
DC rated operational voltage	110 ... 250 V
Frequency	50 ... 60 Hz
Control gear service life	C10 ≥ 50 h, Ta ≤ 60 °C C10 ≥ 100 h, Ta ≤ 50 °C
LED service life	L90B50 ≥ 100 h
Lighting Data	
Number of lamps	1
Lamp wattage	18 W
Lamp	LED
Light colour	5000 K – neutral white

Lighting Data

Light distribution	120°x120° with diffusing glass
Luminaire efficacy	157 lm/W
Luminous flux	2890 lm
Colour rendering	≥ 80
Colour temperature	5000 K
Light source efficiency class	B

Ambient Conditions

Ambient temperature	-40 °C ... 60 °C
---------------------	------------------


Mechanical Data

Version	Standard
IP degree of protection (IEC 60598)	IP66/IP67
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Light grey (RAL 7035)
Insert nut material	Brass
Diffuser	With diffuser
Sealing material	Silicone
Silicone-free content	Contains silicone
Translucent cover material	Polycarbonate
Translucent cover	Clear
Installed terminal strip	PE + N + L1 + L2 + L3
Max. solid connection terminals	6 mm²
Max. finely stranded connection terminals	4 mm²
Type of connection cable	Solid Finely stranded
Size	2
Width	184 mm
Height	125 mm
Length	700 mm
Impact strength (IEC 62262)	IK10
Disconnection of the luminaire	No
Weight	4.4 kg
Weight	9.7 lb


Components


Threaded plate	1x SS430 stainless steel
Ballast	6045/311-130-10
Through wiring	without
Drilled holes	1 x M20
Cable glands and entries	can be ordered as an accessory
Stopping plugs	Can be ordered as accessories
Accessories	without

Light Distribution Curves

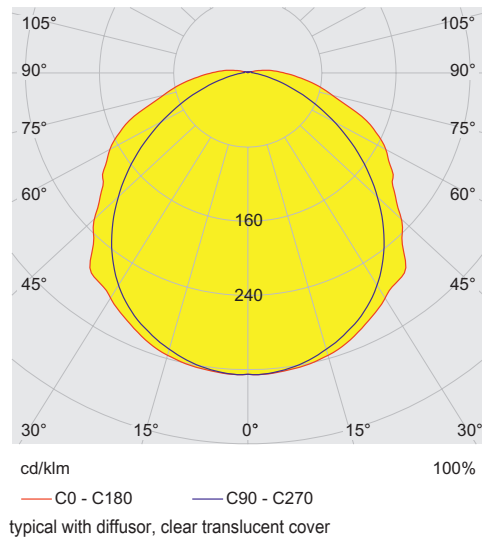


Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

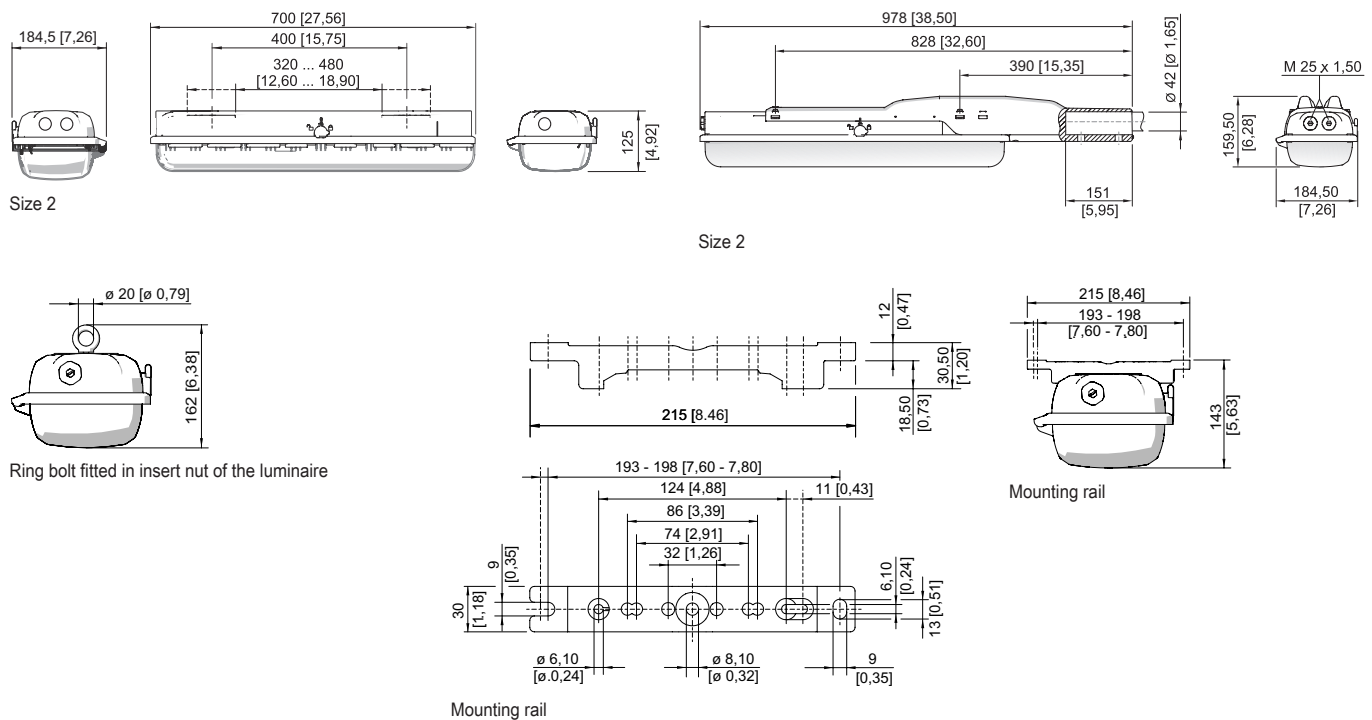





Pipe clamp fitted in mounting rail



Mounting bracket fitted in mounting rail



A



Wall mounting bracket fitted in mounting rail

Accessories

Pole mounting sleeve




for the subsequent mounting on lights size 2 and size 4, completely with assembly parts (for pipe diameter 42 mm)

Art. No.

227512

Adapter plate for mounting EXLUX 6002 on EXLUX 6000 mounting interfaces




Adapter plate for installation of EXLUX 6002 luminaires onto EXLUX 6000 interfaces

Art. No.

240653

Protection against accidental contact




The protection against accidental contact prevents maintenance technicians and electrical installers from accidentally touching conductive parts. The degree of protection is increased to IP20 when the protection against accidental contact is used.

Art. No.

283153

Fall protection



Accessories for mounting an arrester cable

Art. No.

295927

Holder for translucent cover




The fall prevention system for the light fitting cover prevents the light fitting cover from falling accidentally when the light fitting is opened.

Art. No.

226791

Breather



Thread: M25 x 1.5 (20 pieces); without jam nut

Art. No.

285780

M25 x 1.5 in order to avoid condensate formation

115738

Lighting


Linear luminaire With LED

GRP

6002/4128-0100-150-0020-20-8500 Art. No. 270434

STAHL

Breather



Thread: M20 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut


Art. No.

323702

Thread: M25 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut

296608

Mounting bracket




mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair

Art. No.

222456

Mounting rail




Mounting accessories for ceiling mounting of EXLUX luminaires with V4A metal insert for reinforcement

Art. No.

325835

Mounting accessories for ceiling mounting of EXLUX luminaires with V4A metal insert and captive M8 nut

329336



for a variable mounting distance; 1 pair

222826

Ring bolt




M8, direct mounting in insert nuts; 1 pair

Art. No.

115736

Pipe clamp



R 1 1/2"; with mounting rail for a variable mounting distance; material: stainless steel; 1 pair

Art. No.

222459


R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair

222458

R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair

222460

Box spanner




M8 / A/F 13;
For actuating the central lock

Art. No.

222430

Ceiling and wall mounting bracket



mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair

Art. No.

222827

Lighting



Linear luminaire With LED

GRP

6002/4128-0100-150-0020-20-8500 Art. No. 270434

STAHL

Spare Parts

Cover		Art. No.
	for luminaire size 2	222427
Reflector Plate		Art. No.
	Spare part for 6002 or upgrade 6001 size 2, colour temperature 5000 K	270812

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.