

# Isolator Barriers

## Ex i relay modules

Ex i field circuit

9172/21-11-00k Art. No. 160370



- Binary input or output with two channels
- For separating intrinsically safe and non-intrinsically safe signal and control circuits
- Can be used up to SIL 2 (IEC/EN 61508)

MY R. STAHL 9172A



The 9172 series relay module separates intrinsically safe and non-intrinsically safe binary signal and control circuits. To do this, it makes intrinsically safe inputs and outputs available with two channels. Depending on the version, the device has either an intrinsically safe drive or an intrinsically safe output contact, and can therefore be used as an output or input isolator.

## Technical Data

Explosion Protection	
Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEX gas certificate	IECEX BVS 09.0002 X
IECEX gas certificate	IECEX BVS 09.0002 X
IECEX gas explosion protection	Ex ec nC [ia Ga] IIC T4 Gc
IECEX dust certificate	IECEX BVS 09.0002 X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	BVS 04 ATEX E 097 X
ATEX gas explosion protection	Ex II 3 (1) G Ex ec nC [ia Ga] IIC T4 Gc
ATEX dust certificate	BVS 04 ATEX E 097 X
ATEX dust explosion protection	Ex II (1) D [Ex ia Da] IIIC
FMus certificate	FM16US0122X
cFM certificate	FM16CA0067X
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, [AEx ia]/[Ex ia] IIC T4 at Ta = 70°C See Doc. 91 726 01 31 1
Certificates	ATEX (BVS), Canada (FM), China (NEPSI), IECEX (BVS), India (PESO), SIL (exida), USA (FM)
Ship approval	CCS, EU RO MR (DNV)
Declaration of Conformity	ATEX (EUK), China (CCC)
Installation	in Zone 2, Division 2 and in the safe area
Further information	see respective certificate and operating instructions
Safety Data	
Contact Ui/li AC	45 V/4 A

# Isolator Barriers

## Ex i relay modules

### Ex i field circuit

9172/21-11-00k Art. No. 160370



#### Safety Data

Contact Ui/li DC 1	45 V/0.25 A
Contact Ui/li DC 2	30 V/4 A
Internal capacitance C <sub>i</sub> (contact)	negligible
Internal inductance L <sub>i</sub> (contact)	negligible
Safety-related max. voltage	253 V

#### Functional Safety

SIL	2
HFT	0
SFF	62%
Lambda SD	0 FIT
Lambda SU	41 FIT
Lambda DD	0 FIT
Lambda DU	25 FIT
PFD <sub>avg</sub> at T <sub>proof</sub> 1 year	1,17E-04
PFD <sub>avg</sub> at T <sub>proof</sub> 2 years	2,23E-04
PFD <sub>avg</sub> at T <sub>proof</sub> 5 years	5,42E-04

#### Electrical Data

Number of channels	2
--------------------	---

#### Auxiliary Power

Auxiliary power	without
Max. power dissipation	0.4 W
Polarity reversal protection	Yes

#### Galvanic Isolation

Test voltage as per standard	EN IEC 60079-11
Ex i input to output	1.5 kV AC
Input to input	350 V AC

#### Input

Input	Non-Ex i signal
Switching signal input	12 – 31.2 V
Input current consumption 1	< 25 mA at 12 V
Input current consumption 2	< 17 mA at 24 to 31.2 V

#### Output

Output	Change-over contact - Ex i
Min. output load condition	1 V / 1 mA
Max. output DC load condition	30 V / 4 A 45 V/0.25 A
Max. output AC load condition	30 V / 4 A cos φ > 0.7
Output switching frequency	≤ 15 Hz
Switching delay ON/OFF	≤ 10 ms
Switching delay OFF/ON	≤ 10 ms
Output electrical service life	≥ 1 x 10 <sup>5</sup> operating cycles
Electrical service life note	Resistive load
Output mechanical service life	≥ 1 x 10 <sup>7</sup> operating cycles

# Isolator Barriers

## Ex i relay modules

Ex i field circuit

9172/21-11-00k Art. No. 160370



### Ambient Conditions

Ambient temperature °C	-20 °C ... +70 °C (Single device) -20 °C ... +60 °C (Group assembly)
Ambient temperature °F	-4 °F ... +158 °F (Single device) -4 °F ... +140 °F (Group assembly)
Note	The installation conditions affect the ambient temperature. Observe the "Cabinet installation guide".
Storage temperature °C	-40 °C ... +80 °C
Storage temperature °F	-40 °F ... +176 °F
Max. relative humidity	95%
Use at the height of	< 2000 m
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 For use in industrial areas; NAMUR NE 21


### Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Grid dimension	17.6 mm
Width	17.6 mm
Width, inches	0.69 in
Height	114.5 mm
Height in inches	4.51 in
Length	128 mm
Length in inches	5.04 in
Weight	190 g
Weight	0.42 lb

### Mounting / Installation

Mounting type	DIN rail NS35/15, NS35/7.5
Connection type	Spring clamp terminal
Min. rigid conductor cross section	0.2 mm <sup>2</sup>
Max. rigid conductor cross section	2.5 mm <sup>2</sup>
Min. flex conductor cross section	0.2 mm <sup>2</sup>
Max. flex conductor cross section	2.5 mm <sup>2</sup>
Connection cross-section AWG	24 ... 14

### Technical Drawings – Subject to Alterations

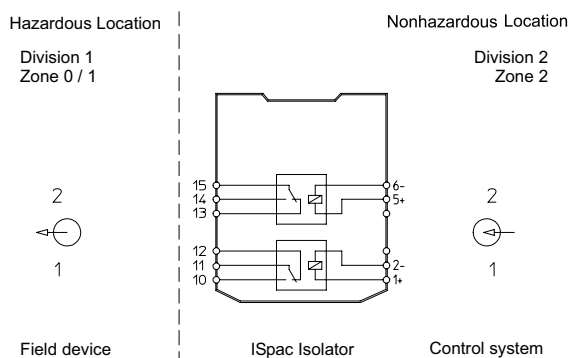

Connection Diagram 9172/21-11-00

# Isolator Barriers


## Ex i relay modules

Ex i field circuit

9172/21-11-00k Art. No. 160370



### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

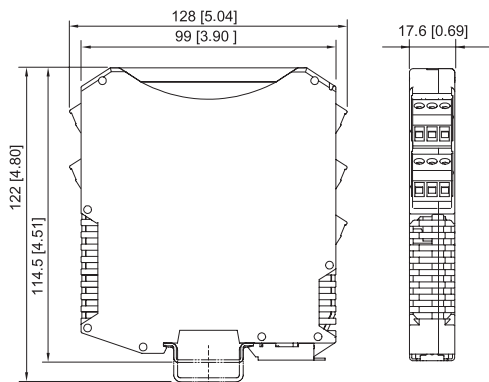

ISpac Series 9146, 9147, 9160, 9162, 9163, 9165,  
9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193,  
Fieldbus Power Supply Series 9412 with spring clamp  
terminal

## Accessories

### Transparent cover



For 91xx ISpac modules  
Yellow, transparent  
Clear identification of the device for SIL applications.  
(Packaging unit: 10 pieces)

### Art. No.

200914

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.