

# Isolator Barriers

Temperature transmitter

Non-Ex i field circuit ISpac

9182/10-51-64k Art. No. 201685



- Temperature transmitter, can be configured for virtually any common sensor type
- Broad range, including variants with signal conversion and trip amplifier function
- Can be used up to SIL 2 (IEC/EN 61508)

MY R. STAHL 9182B



9182 series temperature transmitters for field circuits can be used to connect temperature sensors and potentiometers. They are easy to configure for virtually any sensor type by means of software or a DIP switch. These sensor types include Pt100 sensors, thermocouples and potentiometers. Variants with a trip amplifier function allow the input signal to be analysed using two independent contacts.

## Technical Data

Explosion Protection	
Application range (zones)	2
IECEEx gas certificate	IECEEx BVS 09.0046 X
IECEEx gas explosion protection	Ex ec nC IIC T4 Gc
ATEX gas certificate	BVS 08 ATEX E 016 X
ATEX gas explosion protection	Ex II 3 G Ex ec nC IIC T4 Gc
FMus certificate	FM16US0122X
cFM certificate	FM16CA0067X
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, Group IIC T4 at Ta = 70°C See Doc. 91 826 02 31 1
Certificates	ATEX (BVS), Brazil (ULB), Canada (FM), China (NEPSI), IECEEx (BVS), India (PESO), Korea (KTL), SIL (exida), USA (FM)
Ship approval	CCS, EU RO MR (DNV)
Functional Safety	
SIL	2
HFT	0
SFF	78%
Lambda SD	0 FIT
Lambda SU	173 FIT
Lambda DD	384 FIT
Lambda DU	157 FIT
PFD <sub>avg</sub> at T <sub>proof</sub> 1 year	7,59E-04
PFD <sub>avg</sub> at T <sub>proof</sub> 2 years	1,44E-03
PFD <sub>avg</sub> at T <sub>proof</sub> 5 years	3,48E-03
Further information	See safety manual and test report

# Isolator Barriers

Temperature transmitter

Non-Ex i field circuit ISpac

9182/10-51-64k Art. No. 201685



## Electrical Data

Number of channels	1			
LFD relay	Yes			
<b>Electrical connection</b>	<b>Input configuration</b>			
	<b>Thermocouple</b>	Reference junction		
		Const. temp.	Ext. Pt. 100	
	<b>Resistance temperature detector</b>	2-wire	3-wire	4-wire
<b>Potentiometer</b>		3-wire		
<b>Auxiliary Power</b>				
Auxiliary power	24 V DC			
Nominal voltage $V_{nom}$	24 V DC			
Auxiliary power voltage range	18 to 31.2 V			
Voltage range residual ripple	$\leq 3,6 V_{SS}$			
Nominal current	70 mA			
Power consumption	1.9 W			
Max. power dissipation	1.9 W			
Polarity reversal protection	Yes			
Undervoltage monitoring	Yes			
Undervoltage monitoring note	no faulty devices / output states			
Operation indication	Green &quot;PWR&quot; LED			
<b>Galvanic Isolation</b>				
Ex i input to output	1.5 kV AC			
Ex i input to auxiliary power	1.5 kV AC			
Ex i input to fault message contact	1.5 kV AC			
Test voltage as per standard	EN 50178			
Output to auxiliary power	350 V AC			
Output to output	350 V AC			
Fault message contact to auxiliary power	350 V AC			
Fault message contact to output	350 V AC			
<b>Input</b>				
Sensor adjustment	Via software			

# Isolator Barriers

Temperature transmitter

Non-Ex i field circuit ISpac

9182/10-51-64k Art. No. 201685



## Input

Input for resistance temperature detector	See table					
Connection type RTD input	2-, 3- and 4-wire circuits					
2-conductor adjustment	Via ADJ DIP switch					
RTD linearisation	Temperature/resistance					
Sensor current RTD	≤ 0.25 mA					
Max. line resistance per wire RTD	50 Ω (2-wire connection) 100 Ω (3-, 4-wire connection)					
Input thermocouple	Types B, E, J, K, N, R, S, T, L, U, XK					
Linearisation thermocouple	Temperature/voltage					
Max. line resistance per loop thermocouple	1000 Ω					
External reference junction	Pt100 2-conductor connection					
Potentiometer input	Up to 100 kΩ					
Potentiometer connection type	3-conductor connection					
Potentiometer sensor current	≤ 0.25 mA					
Input resistance temperature detector (RTD)	Types	Standard	Basic range	Min. span	Middle resolution	Middle measurement error
	Pt100 Pt500 Pt1000	IEC 60751	-200 ... +850 °C	50 K	0,1 K	0,35 K
	Ni100 Ni500 Ni1000	DIN 43760	-60 ... +180 °C	31 K	0,1 K	0,25 K
Input thermocouple	Types	Standard	Basic range	Min. span	Middle resolution	Middle measurement error
	B	IEC 60584-1	250 ... +1800 °C	314 K	0,1 K	1,2 K
	E		-200 ... +1000 °C	36 K	0,1 K	0,2 K
	J		-200 ... +1200 °C	42 K	0,1 K	0,2 K
	K		-200 ... +1370 °C	63 K	0,1 K	0,3 K
	N		-200 ... +1300 °C	75 K	0,1 K	0,3 K
	R		-50 ... +1767 °C	171 K	0,1 K	0,7 K
	S		-50 ... +1767 °C	185 K	0,1 K	0,8 K
	T	-200 ... +400 °C	60 K	0,1 K	0,3 K	
	L	DIN 43710	-200 ... +900 °C	55 K	0,1 K	0,3 K
	U		-200 ... +600 °C	48 K	0,1 K	0,3 K
XK	GOST	-200 ... +800 °C	50 K	0,1 K	0,2 K	
Input potentiometer	Basic measuring range	Middle measurement error				
	50 ... 500 Ω	0,1 Ω				
	0,5 ... 5 kΩ	1 Ω				
	1 ... 10 kΩ	2 Ω				
	10 ... 100 kΩ <sup>1)</sup>	-- <sup>1)</sup> with parallel 10 kΩ Shunt, no open-circuit detection				

# Isolator Barriers

Temperature transmitter

Non-Ex i field circuit ISpac

9182/10-51-64k Art. No. 201685



Output	
Output	0/4 to 20 mA active/source
Output signal	0/4 to 20 mA (configurable)
Function range output	0 – 21 mA
Load resistance $R_L$	0 ... 750 $\Omega$
Output signal resolution	$\leq 1 \mu\text{A}$
Settling time output	$\leq 35 \text{ ms}$
Response time output	$\leq 500 \text{ ms}$
Limit contact (per channel)	2 NO/NC
Switching voltage limiting values	$\leq \pm 30 \text{ V}$
Switching current limiting values	$\leq 100 \text{ mA}$
Switching state indication	Yellow &quot;A, B&quot; LED
LF switch user adjustment	Activated/deactivated
Wire breakage error detection input	$> 1 \text{ k}\Omega$
Behaviour of the output at line fault	configurable
Line fault indication	Red &quot;LF&quot; LED
Fault message contact switching capacity	30 V / 100 mA
Line fault and loss of power signalization	- Contact (30 V/100 mA), closed against earth in case of error - pac-Bus, potential-free contact (30 V/100 mA)
Deviations / error note	Information in % of the measuring range (20 mA) at $U_N$ , 23 °C
Average measurement fault	$< 0,1\%$
Temperature influence	$\leq 0,25 \text{ \%}/10\text{K}$

## Ambient Conditions

Ambient temperature °C	-20 °C ... +70 °C (Single device) -20 °C ... +60 °C (Group assembly)
Ambient temperature °F	-4°F ... +158°F (Single device) -4°F ... +140°F (Group assembly)
Storage temperature °C	-40 °C ... +80 °C
Storage temperature °F	-40°F ... +176°F
Max. relative humidity	95%
Max. additional relative humidity	No condensation
Use at the height of	$< 2000 \text{ m}$
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 For use in industrial areas; NAMUR NE 21

## Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Grid dimension	17.6 mm
Width	17.6 mm
Width, inches	0.69 in
Height	114.5 mm
Length	128 mm
Length in inches	5.04 in
Mounting depth in inches	4.51 in
Weight	0.37 lb

# Isolator Barriers

Temperature transmitter

Non-Ex i field circuit ISpac

9182/10-51-64k Art. No. 201685




## Mounting / Installation

Mounting type	DIN rail NS35/15, NS35/7.5
Mounting orientation	Vertical Horizontal
Connection type	Spring clamp terminal
Min. rigid conductor cross section	0.2 mm <sup>2</sup>
Max. rigid conductor cross section	2.5 mm <sup>2</sup>
Min. flex conductor cross section	0.2 mm <sup>2</sup>
Max. flex conductor cross section	2.5 mm <sup>2</sup>
Connection cross-section AWG	24 ... 14

## Technical Drawings – Subject to Alterations

Nonhazardous Location


Division 2  
Zone 2

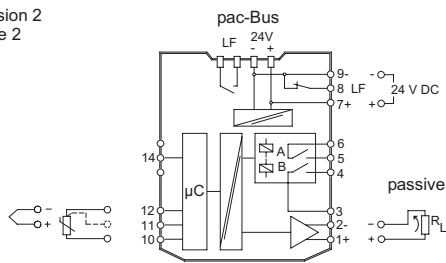

Field device ISpac Isolator Control system

Connection diagram 9182/10-51-64

## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

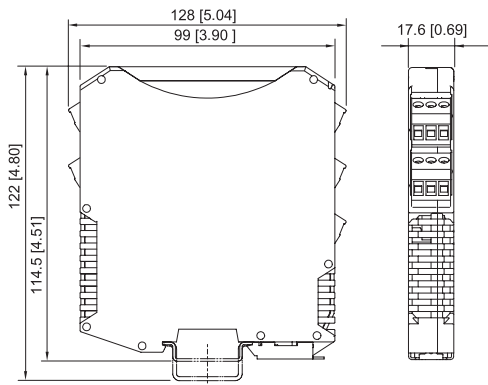

ISpac Series 9146, 9147, 9160, 9162, 9163, 9165,  
9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193,  
Fieldbus Power Supply Series 9412 with spring clamp  
terminal

## Accessories

### 9182 Parameterisation

		Art. No.
	Parameterisation ex works optionally available for all variants.	270433

# Isolator Barriers

Temperature transmitter

Non-Ex i field circuit ISpac

9182/10-51-64k Art. No. 201685

STAHL

## Parameterization set ISpac - Wizard

Art. No.



The software serves for commissioning, configuring and diagnosing the ISpac isolators Series 9146, 9162, 9182 and 9282.  
For further information, see operating instructions.  
Form of delivery: USB stick; parameterization software incl. parameterization cable / adaptor  
System requirements:  
IBM compatible PC with MS XP, Vista, Windows 7, 10  
RS 232 C interface  
RS 232 / USB adaptor

202595

## Transparent cover

Art. No.



For 91xx ISpac modules  
Yellow, transparent  
Clear identification of the device for SIL applications.  
(Packaging unit: 10 pieces)

200914

## External reference junction

Art. No.



External reference junction for 2 x thermocouple (1 x Pt100 for 2-, 3- or 4-wire connection) integrated into the 4-pin terminal block. Mounted on a DIN rail.

160675



External reference junction for 1 x thermocouple (Pt100 in 2-wire connection) integrated into the pluggable terminal (3-pin). Mounted in the ISpac device instead of the standard connection terminal.

160676

## Spare Parts

### Screw terminal

Art. No.



3-pole plug, screw connector  
thread: M3  
stripping length: 7 mm  
color: green

112817



3-pole plug, screw connector  
thread: M3  
stripping length: 7 mm  
color: black

112816



3-pole plug, screw connector  
thread: M3  
stripping length: 7 mm  
color: blue

112818

### Screw terminal with test tap

Art. No.



3-pole plug with test tap, screw connector  
thread: M3  
stripping length: 7 mm  
colour: black

113005





# Isolator Barriers

Temperature transmitter

Non-Ex i field circuit ISpac

9182/10-51-64k Art. No. 201685



	3-pole plug with test tap, screw connector thread: M3 stripping length: 7 mm colour: blue	113004
<b>Spring clamp terminal</b>		<b>Art. No.</b>
	3-pole plug with test tap, spring clamp connection stripping length: 10 mm color: green	112825
	3-pole plug with test tap, spring clamp connection stripping length: 10 mm color: black	112824
	3-pole plug with test tap, spring clamp connection stripping length: 10 mm color: blue	112826

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.