

Lighting

Linear luminaire With LED  
GRP

6602/1141-0300-152-2220-22-857    Art. No. 325348



- Smart Central Locking System – Allows effortless access for quick maintenance, minimizing downtime and enhancing operational efficiency.
- Advanced Surge Protection up to 6KV – Engineered for resilience, the robust design shields the luminaire from electrical surges, ensuring long-lasting performance.
- Superior Energy Efficiency – Achieves an outstanding 130 lumens per watt, delivering maximum illumination with minimal energy consumption.
- Long-Lasting LED Performance – Designed for durability, the luminaire delivers over 60,000 hours of service life even in +55°C ambient conditions.

MY R. STAHL 6602A

The 6602 linear LED luminaire is built to withstand harsh conditions, making it ideal for industries such as oil & gas, specialty chemicals, and pharmaceuticals and similar hazardous environments. With its high-performance illumination, it is perfect for lighting large surfaces at mounting heights of up to 10 meters, as well as illuminating equipment and objects both indoors and outdoors. For added flexibility, the luminaire can be easily mounted on poles using the pole mounting sleeve accessory, ensuring adaptable installation across various industrial settings.

Technical Data

Explosion Protection	
Ex version	Yes
Application range (zones)	2, 21, 22
IECEX gas certificate	IECEX IBE 24.0030
IECEX gas explosion protection	Ex ec mb IIC T4 Gc
IECEX dust certificate	IECEX IBE 24.0030
IECEX dust explosion protection	Ex tb IIIC T85 °C Db
Certificates	IECEX (IBE)
Electrical Data	
Rated operational voltage AC	100 ... 277 V
Rated operational voltage DC	110 ... 277 V
Frequency range	50 – 60 Hz
Lighting Data	
Number of lamps	1
Lamp wattage	44 W
Lamp	LED
Light colour	5700 K – cool white
Light distribution	120°x120° with diffusing glass
Luminaire efficacy	127 lm/W
Luminous flux	5594 lm
Colour rendering	≥ 80
Colour temperature	5700 K
Ambient Conditions	
Ambient temperature °C	-40 °C ... +55 °C Note: Through wiring Max. 3x10 A
Mechanical Data	
Version	Standard

# Lighting

## Linear luminaire With LED

### GRP

6602/1141-0300-152-2220-22-857 Art. No. 325348

STAHL

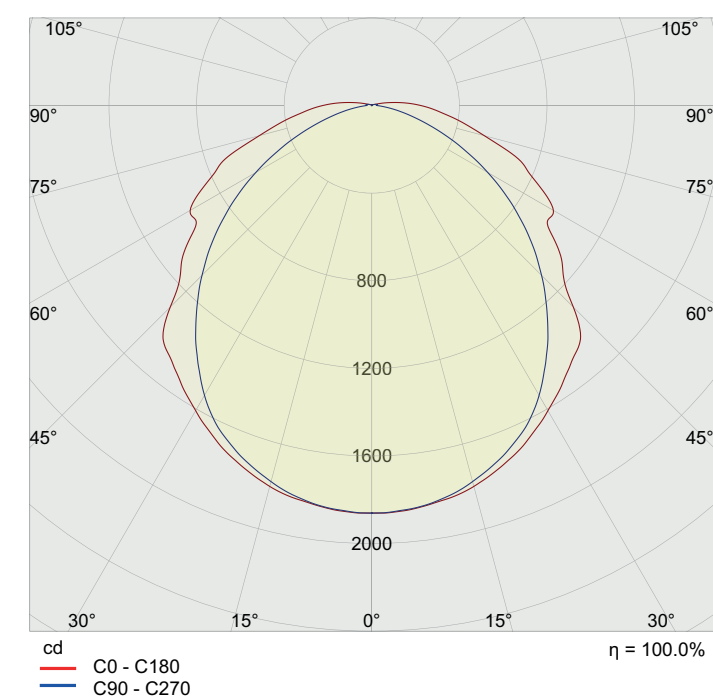
#### Mechanical Data

IP degree of protection (IEC 60598)	IP66/IP67
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure color	Light grey (RAL 7035)
Diffuser	With diffuser
Sealing material	Silicone
Silicone-free content	Contains silicone
Translucent cover material	Polycarbonate
Installed terminal strip	PE + N + L1 + L2 + L3
Max. solid connection terminals	6 mm <sup>2</sup>
Max. finely stranded connection terminals	4 mm <sup>2</sup>
Type of connection cable	Finely stranded Solid
Size	4
Width	184 mm
Height	125 mm
Length	1310 mm
Impact strength (IEC 62262)	IK10
Weight	6.7 kg
Weight	14.77 lb
Disconnection of the luminaire	No

#### Components

Threaded plate	2x stainless steel
Ballast	6049/111-110-10
Through wiring	With 5 conductors 2.5 mm <sup>2</sup>
Drilled holes	3 x M20
Cable glands and entries	can be ordered as an accessory
Stopping plugs	Can be ordered as accessories
Accessories	without





Light Distribution Curves



Size 4

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

Accessories

Breather		Art. No.
	Thread: M25 x 1.5 (20 pieces); without jam nut	285780
	Thread: M25 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut	296608
	M25 x 1.5 in order to avoid condensate formation	115738
Ceiling and wall mounting bracket		Art. No.
	mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair	222827

# Lighting


Linear luminaire With LED

GRP


6602/1141-0300-152-2220-22-857 Art. No. 325348

STAHL


## Mounting bracket

	mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair	<b>Art. No.</b> 222456
--	--	---------------------------

## Mounting rail

	for a variable mounting distance; 1 pair	<b>Art. No.</b> 222826
--	--	---------------------------


## Pipe clamp

	R 1 1/2"; with mounting rail for a variable mounting distance; material: stainless steel; 1 pair	<b>Art. No.</b> 222459
	R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222458
	R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222460


## Pole mounting

	Pole mounting acces. 1.4301 ø38mm-1 pair	<b>Art. No.</b> 324916
	Pole mounting acces. 1.4301 ø42mm-1 pair	324914
	Pole mounting acces. 1.4301 ø50mm-1 pair	324915
	Pole mounting acces. 1.4301 ø60mm-1 pair	324912
	Pole mounting acces. 1.4404 ø50mm-1 pair	324917
	Pole mounting acces. 1.4404 ø60mm-1 pair	324913


## Pole mounting sleeve

	for the subsequent mounting on lights size 2 and size 4, completely with assembly parts (for pipe diameter 42 mm)	<b>Art. No.</b> 227512
--	---	---------------------------


## Ring bolt

	M8, direct mounting in insert nuts; 1 pair	<b>Art. No.</b> 115736
--	--	---------------------------

## Socket wrench

	M8 / A/F 13; For actuating the central lock	<b>Art. No.</b> 222430
--	--	---------------------------

## Wall mounting

	Wall/ceiling mtg.bkt. 1.4301w-1pair	<b>Art. No.</b> 324918
--	-------------------------------------	---------------------------

Lighting


Linear luminaire With LED

GRP

6602/1141-0300-152-2220-22-857    Art. No. 325348



Spare Parts

Cover		Art. No.
	for luminaire size 4	222428

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.