

# Load disconnect switches and motor starters



## Manual transfer switch

100 A, non-fused

7146/5-V11-H32-00-0500-0 Art. No. 286748



- 3-pole horsepower (hp) rated switch
- Suitable for voltages up to 600 V AC/240 V DC – limitations may apply
- Robust, lockable rotary actuator
- Lightweight construction
- Glass fibre reinforced polyester (GRP)
- Suitable for low ambient temperatures
- Enclosure type 3, 4, 4X, IP66
- No conduit seal required
- Class I, Div. 2/AEx Zone 2

MY R. STAHL 7146A



Our switches are specifically engineered for hazardous locations and harsh environments with a corrosion resistant enclosure and wide temperature range. Ideal for close proximity installation of field equipment such as control panels, motors, skids or machinery. Whether the requirement is for disconnect switches to completely de-energize for service or maintenance tasks, or transfer switches to ensure continuous power supply to essential equipment, our solutions offer unmatched reliability. With our standard solutions, entries are not pre-installed, providing users with the flexibility to customized their own entries based on size, location and type. Built to withstand demanding conditions while ensuring safety and ease of use in various applications.

## Technical Data

### Explosion Protection

|                     |   |
|---------------------|---|
| Area of application | Canada<br>USA   |
| FMus certificate    | FM18US0275X   |
| cFM certificate     | FM18CA0132X   |
| Marking FMus        | Class I, Div. 2, Groups A,B,C,D; T4;<br>Enclosure Type 3, 4, 4X |
| Marking cFM         | Class I, Div. 2, Groups A,B,C,D; T4;<br>Enclosure Type 3, 4, 4X |
| Marking cFM note    | Zone 2 IIC per Canadian Electrical Code Table 18                |
| Certificates        | Canada (FM), USA (FM)   |

### Electrical Data

|                                     |  |
|-------------------------------------|--|
| Rated operational voltage AC        | 600 V  |
| Rated operational voltage DC 1-pole | 60 V   |
| Rated operational voltage DC 2-pole | 125 V  |
| Rated operational voltage DC 3-pole | 240 V  |
| Rated operational current           | 100 A  |
| Nominal power                       | 75 hp  |
| Nominal power note                  | Nominal power (hp) in relation to rated operating voltage 480 V AC |
| Auxiliary contact NC                | without  |
| Auxiliary contact NO                | without  |
| Short circuit protection (sym RMS)  | 25 kA  |
| Additional short-circuit protection | Additional fuse necessary  |
| Short-circuit protection note       | Required back-up fuse in the electrical circuit                    |
| Frequency range                     | 50 – 60 Hz   |

# Load disconnect switches and motor starters



Manual transfer switch

100 A, non-fused

7146/5-V11-H32-00-0500-0 Art. No. 286748

## Auxiliary Power

|                 |          |
|-----------------|----------|
| Nominal voltage | 480 V AC |
|-----------------|----------|

## Ambient Conditions

|                     |                 |
|---------------------|-----------------|
| Ambient temperature | -40°C ... +55°C |
|---------------------|-----------------|

|                     |                  |
|---------------------|------------------|
| Ambient temperature | -40°F ... +131°F |
|---------------------|------------------|

## Mechanical Data

|                           |      |
|---------------------------|------|
| Degree of protection (IP) | IP66 |
|---------------------------|------|

|                               |          |
|-------------------------------|----------|
| Enclosure type (UL50 & UL50E) | 3, 4, 4X |
|-------------------------------|----------|

|                    |                                   |
|--------------------|-----------------------------------|
| Enclosure material | Polyester, Glass fibre reinforced |
|--------------------|-----------------------------------|

|                     |                           |
|---------------------|---------------------------|
| Additional terminal | Main contact on terminals |
|---------------------|---------------------------|

|   |        |
|---|--------|
| Connection cross section, stranded min. | 10 AWG |
|---|--------|

|   |           |
|---|-----------|
| Connection cross section, stranded max. | 300 kcmil |
|---|-----------|

|                   |          |
|-------------------|----------|
| Construction type | Standard |
|-------------------|----------|

|       |          |
|-------|----------|
| Width | 681.5 mm |
|-------|----------|

|               |          |
|---------------|----------|
| Width, inches | 26.83 in |
|---------------|----------|

|        |         |
|--------|---------|
| Height | 1022 mm |
|--------|---------|

|                  |          |
|------------------|----------|
| Height in inches | 40.24 in |
|------------------|----------|

|       |        |
|-------|--------|
| Depth | 243 mm |
|-------|--------|

|                 |         |
|-----------------|---------|
| Depth in inches | 9.57 in |
|-----------------|---------|

|                    |                                  |
|--------------------|----------------------------------|
| Service life, min. | 10 <sup>5</sup> operating cycles |
|--------------------|----------------------------------|

|               |       |
|---------------|-------|
| Handle colour | Black |
|---------------|-------|

|                          |       |
|--------------------------|-------|
| Protective collar colour | Black |
|--------------------------|-------|

|      |                  |
|------|------------------|
| Seal | Silicone, foamed |
|------|------------------|

|             |                           |
|-------------|---------------------------|
| Lockable in | Three times in 0 position |
|-------------|---------------------------|

|                          |        |
|--------------------------|--------|
| Detailed number of poles | 3-pole |
|--------------------------|--------|

|        |       |
|--------|-------|
| Weight | 35 kg |
|--------|-------|

|        |          |
|--------|----------|
| Weight | 77.16 lb |
|--------|----------|

## Components

|         |         |
|---------|---------|
| Entries | without |
|---------|---------|

# Load disconnect switches and motor starters




Manual transfer switch

100 A, non-fused

7146/5-V11-H32-00-0500-0 Art. No. 286748

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

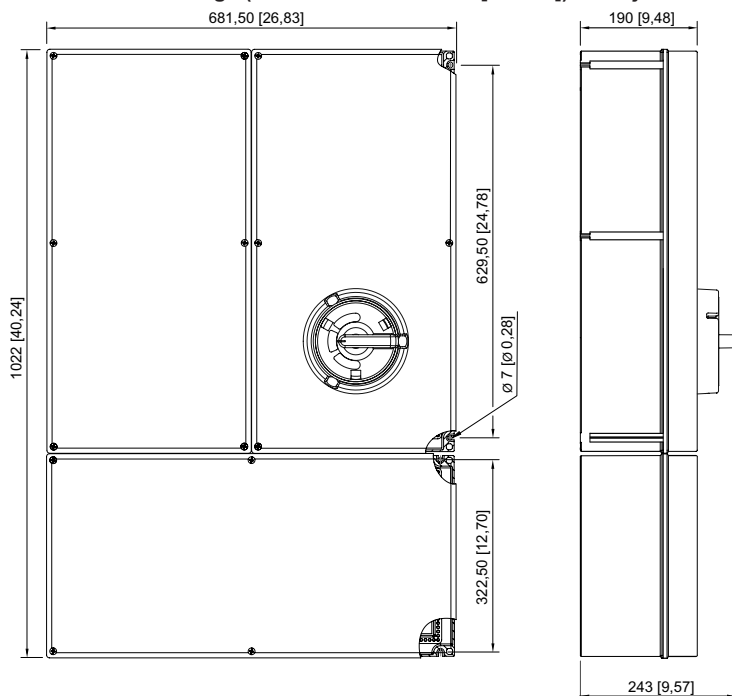

- 7146/5-V11-H08-00-0500-0
- 7146/5-V11-H08-AA-0500-0
- 7146/5-V11-H09-00-0500-0
- 7146/5-V11-H32-00-0500-0
- 7146/5-V11-H32-AA-0500-0
- 8146/5-V11-H08-00-0500-0
- 8146/5-V11-H09-00-0500-0
- 8146/5-V11-H32-00-0500-0

## Accessories

Ex e cable glands for MC, MC-HL, combined and "TECK" armouring Series TMC

Art. No.

# Load disconnect switches and motor starters



## Manual transfer switch

100 A, non-fused

7146/5-V11-H32-00-0500-0 Art. No. 286748

|  |   |        |
|--|---|--------|
|  | Thread size: NPT1/2<br>Clamping range: 8.7 ... 12.7 mm<br>Clamping range inch: 0.34 ... 0.5 in<br>Nickel-plated brass     | 254316 |
|  | Thread size: NPT1/2<br>Clamping range: 13 ... 17 mm<br>Clamping range inch: 0.51 ... 0.67 in<br>Nickel-plated brass       | 254317 |
|  | Thread size: NPT3/4<br>Clamping range: 15 ... 23.3 mm<br>Clamping range inch: 0.59 ... 0.92 in<br>Nickel-plated brass     | 106090 |
|  | Thread size: NPT1<br>Clamping range: 19.8 ... 29.2 mm<br>Clamping range inch: 0.78 ... 1.15 in<br>Nickel-plated brass     | 106091 |
|  | Thread size: NPT1-1/4<br>Clamping range: 27.5 ... 35.2 mm<br>Clamping range inch: 1.08 ... 1.39 in<br>Nickel-plated brass | 254320 |
|  | Thread size: NPT1-1/2<br>Clamping range: 33.5 ... 41.1 mm<br>Clamping range inch: 1.32 ... 1.62 in<br>Nickel-plated brass | 254321 |
|  | Thread size: NPT2<br>Clamping range: 38.3 ... 47.1 mm<br>Clamping range inch: 1.51 ... 1.85 in<br>Nickel-plated brass     | 254322 |
|  | Thread size: NPT2<br>Clamping range: 45 ... 53 mm<br>Clamping range inch: 1.77 ... 2.09 in<br>Nickel-plated brass         | 254323 |
|  | Thread size: NPT2-1/2<br>Clamping range: 52.1 ... 58.9 mm<br>Clamping range inch: 2.05 ... 2.32 in<br>Nickel-plated brass | 254324 |
|  | Thread size: NPT2-1/2<br>Clamping range: 57.1 ... 64.6 mm<br>Clamping range inch: 2.25 ... 2.54 in<br>Nickel-plated brass | 254325 |
|  | Thread size: NPT3<br>Clamping range: 64.6 ... 75.3 mm<br>Clamping range inch: 2.54 ... 2.96 in<br>Nickel-plated brass     | 254326 |
|  | Thread size: NPT3-1/2<br>Clamping range: 74 ... 88.5 mm<br>Clamping range inch: 2.91 ... 3.48 in<br>Nickel-plated brass   | 254327 |

# Load disconnect switches and motor starters



Manual transfer switch

100 A, non-fused

7146/5-V11-H32-00-0500-0 Art. No. 286748

## Metal Ex e conduit hubs Series 8166

Art. No.

|  |   |        |
|--|---|--------|
|  | Thread size: NPT1/2<br>Typ: 8166/11-01-NE   | 139082 |
|  | Thread size: NPT3/4<br>Typ: 8166/11-02-NE   | 139083 |
|  | Thread size: NPT1<br>Typ: 8166/11-03-NE     | 139084 |
|  | Thread size: NPT1-1/4<br>Typ: 8166/11-04-NE | 139085 |
|  | Thread size: NPT1-1/2<br>Typ: 8166/11-05-NE | 139086 |
|  | Thread size: NPT2<br>Typ: 8166/11-06-NE     | 139087 |
|  | Thread size: NPT2-1/2<br>Typ: 8166/11-07-NE | 139088 |

## Auxiliary contact

Art. No.

|   |  |  |
|---|--|--|
|  | Note: The auxiliary contacts can only be retrofitted for 40 A, 63 A and 80 A versions. For all other versions, the auxiliary contact must be ordered separately when placing the order. Retrofitting is not possible for this. |  |
|---|--|--|

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.