

8102/22-31 Art. No. 132989



- Small, robust Ex e enclosure for distributing electrical energy
- IP66 degree of protection
- Equipped with 4 mantle terminals and 1 PE connection
- Available with plastic semi-glands or cable glands

MY R. STAHL 8102A



R. STAHL junction boxes from series 8102 are small Ex e enclosures for conducting and distributing electrical energy in hazardous areas. They are made from glass-fibre-reinforced polyester resin and are therefore extremely robust. The junction box has 5 mantle terminals, whereby one is used as a PE connection point. The cable dia. range of the mantle terminals is 2 x 4 mm<sup>2</sup>.

### Technical Data

#### Explosion Protection

Area of application	IECEX European Union (ATEX)
Application range (zones)	1, 2, 21, 22
IECEX gas certificate	IECEX PTB 15.0010
IECEX gas explosion protection	Ex ia ib IIC T6 Gb
IECEX dust certificate	IECEX PTB 15.0010
IECEX dust explosion protection	Ex tb IIIC T80 °C Db
ATEX gas certificate	PTB 01 ATEX 1136
ATEX gas explosion protection	⊕ II 2 G Ex ia ib IIC T6 Gb
ATEX dust certificate	PTB 01 ATEX 1136
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC T80 °C Db
Certificates	ATEX (PTB), IECEX (PTB)
Declaration of conformity	ATEX (EUK), ATEX (Simple apparatus), Declaration of Conformity (ATEX)
Explosion protection note	For product label, see area of application.

#### Electrical Data

Rated operational voltage AC	0 ... 60 V
Rated operational current	10 A (T6)

#### Ambient Conditions

Ambient temperature	-50 °C ... +70 °C (T6)
Ambient temperature	-58°F ... +158°F (T6)

#### Mechanical Data

IP degree of protection (IEC 60529)	IP66
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Dark grey
Silicone-free	No
Connection cross-section	2.5 mm <sup>2</sup>

8102/22-31 Art. No. 132989

### Mechanical Data

Permissible number of conductors per clamping unit, solid	Mantle terminal M7 x 0.75 Conductor cross-section 1.5 mm <sup>2</sup> : Number of conductors min. 1, max. 4 Conductor cross-section 2.5 mm <sup>2</sup> : Number of conductors min. 1, max. 2
Permissible number of conductors per clamping unit, finely stranded prepared, core end sleeve crimped	Mantle terminal M7 x 0.75 Conductor cross-section 1.5 mm <sup>2</sup> : Number of conductors min. 1, max. 3 Conductor cross-section 2.5 mm <sup>2</sup> : Number of conductors min. 1, max. 2
Permissible number of conductors per clamping unit, finely stranded unprepared	Mantle terminal M7 x 0.75 Conductor cross-section 1.5 mm <sup>2</sup> : Number of conductors min. 1, max. 3 Conductor cross-section 2.5 mm <sup>2</sup> : Number of conductors min. 1, max. 2
Permissible number of conductors per clamping unit note	All conductors of a terminal must have the same cross section and be made of the same material.
Cover	Screw-on cover
Width	71 mm
Width, inches	2.8 in
Height	116 mm
Height in inches	4.57 in
Depth	45 mm
Depth in inches	1.77 in
Weight	300 g
Weight	0.66 lb

### Mounting / Installation


Tightening torque	1.4 Nm
Tightening torque lbf in	12.4 lbf in

### Components

Entry 1	3 x
Entry 1 type	Semi-gland
Entry 1	M20
Entry 1 clamping range	6.5 – 14 mm
Metal entry possible 1	No
Type of terminals 1	5 x Mantle terminal 4 mm <sup>2</sup>


8102/22-31 Art. No. 132989

**Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations**

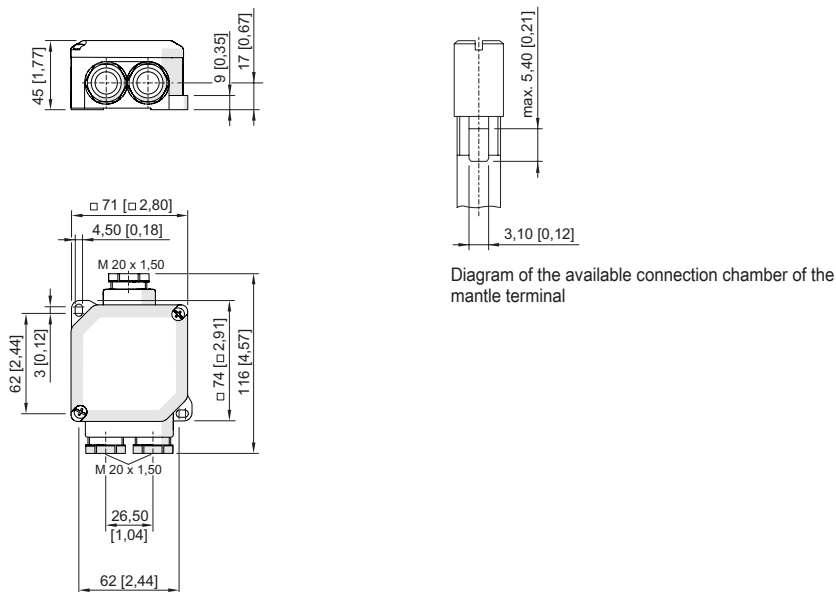

with semi-glands 3 x M20

### Accessories

		Art. No.
	8102 semi-gland 3 x M20	140474

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.