


CMP-32PX2K Art. No. 246363



- Ex d and Ex e cable gland for all armoured cables: SWA, wire-braid and tape made of steel or aluminium
- Seal: Explosion-protected seal with compound, controlled outer load retention seal, flood seal with integral protection
- Internationally certified in accordance with IECEx, ATEX, UL and cCSAus, EMC-tested

MY R. STAHL PX2KA

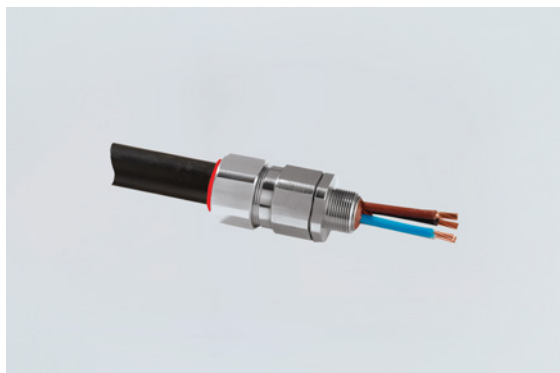

The Series PX2K metal Ex d and Ex e barrier cable glands are suitable for all types of armoured cables, i.e. for SWA, wire-braid and tape armoring made of steel and aluminium. They are equipped with a compound barrier. They have a multifunctional holder for the armoring and various seals. They are also EMC-tested.

Technical Data

Explosion Protection	
Ex version	Ex e & Ex d & Ex nR & Ex ta
Application range (zones)	1, 2, 20, 21, 22
IECEX gas certificate	IECEX CML 18.0182X
IECEX gas certificate 2	IECEX SIM 14.0008 X
IECEX gas explosion protection	Ex db IIC Gb
IECEX dust certificate	IECEX CML 18.0182X
IECEX dust explosion protection	Ex ta IIIC Da
IECEX firedamp certificate	IECEX CML 18.0182X
IECEX firedamp protection	Ex db I Mb
IECEX firedamp protection 2	Ex eb I Mb
IECEX restricted breathing certificate	IECEX CML 18.0182X
IECEX restricted breathing	Ex nR IIC Gc
ATEX gas certificate	CML 18ATEX1325X
ATEX gas certificate 2	CML 18ATEX4317X
ATEX gas explosion protection	⊕ II 2 G Ex db IIC Gb
ATEX dust certificate	CML 18ATEX1325X
ATEX dust explosion protection	⊕ II 1 D Ex ta IIIC Da
ATEX firedamp certificate	CML 18ATEX1325X
ATEX firedamp protection	⊕ I M2 Ex db I Mb
ATEX firedamp protection 2	⊕ I M2 Ex eb I Mb
ATEX restricted breathing certificate	CML 18ATEX1325X
ATEX restricted breathing	⊕ II 3 G Ex nR IIC Gc
Notes	The product certificates can be downloaded from the manufacturer's homepage (www.cmp-products.com)
Ambient Conditions	
Ambient temperature	-60 °C ... +85 °C

Installation equipment and accessories

Cable gland with compound




CMP-32PX2K Art. No. 246363

Mechanical Data

Version	32
Strain relief	No
Degree of protection (IP)	IP66
Degree of protection note	IP67 and IP68 mounting according to the specifications of the manufacturer, CMP. The specified degrees of protection are only fulfilled if CMP installation accessories are used.
Degree of protection (IP) UL	IP66
Sealing material	SOLO LSF
Sealing ring material	Viton
Material	Nickel-plated brass
Silicone-free	Yes
Number of cables	1
Clamping range	23.7 – 33.9 mm
Armouring type	All armouring
Armouring type 2	Without lead sheath
Armouring type 3	With barrier seal
Max. armour wire thickness	999.99 mm
Clamping range	23.7 ... 33.9 mm
Max. number of cores	38
Construction type	BS 6121, IEC/EN 62444
Width across corners	50.6 mm
Width across flats	46 mm
Thread size	NPT1
Thread length	25 mm
Thread pitch	11,5 TPI
Thread standard	NPT
Gland size	32
Grooved cone	0.4 ... 1.2 mm
Stepped cone	1.6 ... 2 mm
Inner sheath	23.6 mm
Max. internal conduit diameter	23.9 mm
Outer sheath	23.7 ... 33.9 mm
Protrusion length	75 mm
Impact strength (IEC 60079)	7 J
Impact strength	20 J
PVC boot	PVC11
Lot size	1
Weight	570 g
Weight	1.26 lb

CMP-32PX2K Art. No. 246363

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

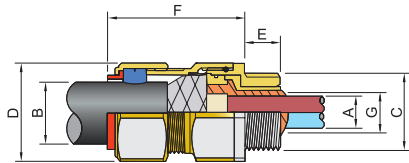

A = Max. inner sheath
G = Max. internal conduit diameter
B = Outer sheath
C = Thread size
D = Width across corners
D = Width across flats
E = Thread length
F = Protrusion length

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.