

Operating and monitoring systems

Thin Client SERIES 500

Device platform EAGLE

PM MT-556-TX

STAHL



- Thin Client for panel mounting, 19" display, 1280 x 1024 pixels
- Zone 2, 22 and Division 2, can be installed in hazardous areas without additional enclosure
- All-round degree of protection IP66, resistive foil touch screen as standard
- Data is transmitted via Ethernet as 10/100Base-TX via CAT5 cable up to 100 m.

WebCode **MT556AA**




R. STAHL's PM MT-556 HMI systems are Thin Clients for panel mounting in hazardous zones 2 and 22 as well as Division 2. Their brilliant 19" displays with analogue-resistive touch screen have a resolution of 1280 x 1024 pixels (format 5:4). Country-specific keyboards, pointer instruments and RFID and barcode scanners are useful accessories making work easier and extending functionality. Data is transmitted via Ethernet as 10/100Base-TX via CAT5 cable up to 100 m.

THIN CLIENT INTEGRATION

PC WORKSTATIONS

VIRTUALIZED SERVERS AND WORKSTATIONS

AUTOMATION IN THE CLOUD

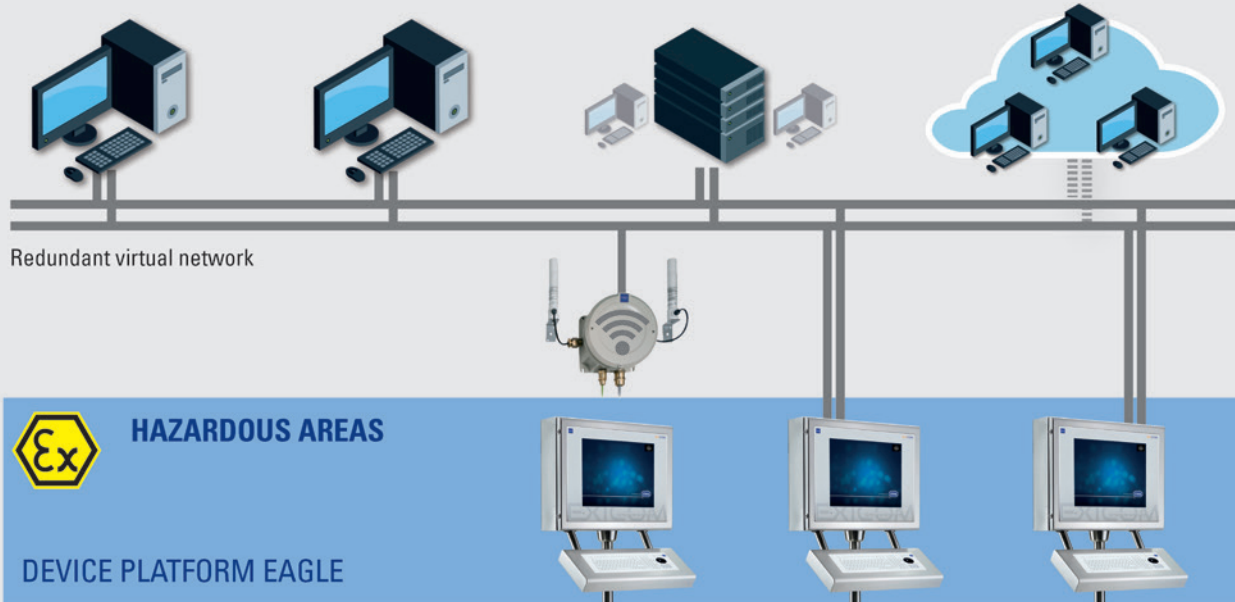

Technical Data

General

Series	Panel mount device PM MT-556 (discontinued)
Product description	19" Thin Client

Operating and monitoring systems

Thin Client SERIES 500

Device platform EAGLE

PM MT-556-TX



General

Technology	Remote HMI Thin Client
HMI type	Panel mount device
WebCode	MT556AA

Explosion Protection

Application range (zones)	2 22
Application range (divisions)	Class I, Division 2 Class II, Division 2 Class III
Certifications	ATEX, IECEx, NEC, CEC, EAC, INMETRO, CNEX
Ship certificates	DNV, LR, ABS
IECEx certification	IECEx TUR 11.0015X
ATEX certification	TÜV 11 ATEX 7103 X
NEC certification	20130611-E202379
CEC certification	2512677
INMETRO certification	UL-BR 12.0398X
CNEX certification	CNEx14.0049X
DNV certification	Certificate number: A-12989 File number: 899.60 Order number: 262.1-001689-6
LR certification	11/20032
ABS certification	15-HG1418766-1-PDA
IECEx gas explosion protection	MT-556-A-TX Ex db eb ia ib mb nA [ib Gb] [ic] IIC T4 Gc MT-556-A-FX Ex db eb ia ib mb nA [ib op is Gb] [ic] IIC T4 Gc
IECEx dust explosion protection	MT-556-A-TX Ex ia tc [ib Db] [ic] IIIC T80°C Dc IP66 MT-556-A-FX Ex ia tc [ib op is Db] [ic] IIIC T80°C Dc IP66
ATEX gas explosion protection	MT-556-A-TX II 3 (2/3) G Ex db eb ia ib mb nA [ib Gb] [ic] IIC T4 Gc MT-556-A-FX II 3 (2/3) G Ex db eb ia ib mb nA [ib op is Gb] [ic] IIC T4 Gc
ATEX dust explosion protection	MT-556-A-TX II 3 (2/3) D Ex ia tc [ib Db] [ic] IIIC T80°C Dc IP66 MT-556-A-FX II 3 (2/3) D Ex ia tc [ib op is Db] [ic] IIIC T80°C Dc IP66
NEC explosion protection	Class I, Division 2, Groups A, B, C, D Class II, Division 2, Groups F, G Class III Hazardous Locations Class I, Zone 2, Group IIC
CEC explosion protection	Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc, Type 4X, IP66 Ex ia tc [ib ic] IIIC T80°C Dc, IP66 Class II, Division 2, Groups E, F, G, T80°C
CNEX gas explosion protection	Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc
INMETRO gas explosion protection	MT-556-A-TX Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc MT-556-A-FX Ex d e ia ib mb nA [ib op is Gb] [ic] IIC T4 Gc

Operating and monitoring systems

Thin Client SERIES 500

Device platform EAGLE

PM MT-556-TX



Explosion Protection

INMETRO dust explosion protection	MT-556-A-TX Ex ia tc [ib Db] [ic] IIIC T80°C Dc IP66 MT-556-A-FX Ex ia tc [ib op is Db] [ic] IIIC T80°C Dc IP66
-----------------------------------	--

Electrical Data

Rated operational voltage DC	24 V
Voltage range DC	20.4 – 28.8 V
Power consumption DC	1.2 A
Rated operational power	36 W
Processor type	ATOM E3845
Processor details	Intel Bay Trail (BT); 1.91 GHz; quad core
RAM	4 GB
Data memory	64 GB MLC 128 GB MLC
Graphics controller	integrated Intel Gen. 7 HD Graphics
Memory technology	SSD solid state flash drive M.2
Operating system	Windows 10 IoT Enterprise
Language support	via operating system
Image	Remote Firmware
Ethernet / Data	10/100Base-TX (Ex nA)
Data cable	CAT5 installation cable AWG22
Data cable length	max. 100 m
Interface medium	CAT5 data transmission
Interface USB	2 x USB (Ex ib) 2 x USB (Ex nA)
Interface serial	1 x RS-232 / RS-422 / RS-485 (Ex nA)
Interface PS/2	for external keyboard (Ex ia)
Optional interface 1	-
Optional interface 2 reader	optional, reader interface (Ex ib)
Interface audio	1 x Audio line out (Ex nA)
Connection compartment	Power supply direct in integrated connection box
Connections	via screw terminals, 2.5 mm ² green (AWG14) (Ex nA)
Wiring	Flexible conductors 0.2 to 2.5 mm ² (AWG24 to AWG14) Rigid conductors 0.2 to 2.5 mm ² (AWG24 to AWG14)
Plug version USB	1x USB connector type A
Max. input voltage U _m	30 VDC
Real-time clock	yes
Real-time clock data buffer	Lithium battery and capacitor buffered, maintenance-free
Battery buffered	> 5 years
Capacitor buffered	at least 4 days
Status LED	below the back lid: for activity on: - Solid state drive or HD - Ethernet Link - COM 1 and COM 2

Display

Display version	TFT Colour display
-----------------	--------------------

Operating and monitoring systems

Thin Client SERIES 500

Device platform EAGLE

PM MT-556-TX



Display

Display version 2	16.7 million colours
Display size inch	19
Display size centimetres	48
Display resolution	SXGA
Total pixels	1280 x 1024
Display dimensions	5:4
Display brightness	TFT 350 cd/m ²
Display contrast	TFT 700:1
Touchscreen	analogue resistive
Touchscreen technology	5-wire
Touchscreen activation	Low activation pressure (0.1 up to max. 1 N)
Touchscreen input method	Finger, gloved finger or stylus
Touchscreen durability	Polyester foil is easily scratched, with high pressure force the spacer dots could be damaged.
Touch screen scratch hardness MoHS	-
Touchscreen scratch hardness pencil test ISO15184	3H
Touchscreen transmissivity / optic	Small milky effect due to the foil
Touchscreen surface contaminants	unaffected
Touchscreen abrasive resistance	36 million times with a silicone rubber of R8 finger, hitting rate 250 g at 2 times per second
Backlight	LED Technology
Backlight service life	70000 h at +25 °C 35000 h at +55 °C
Front plate (display)	Polyester on aluminium (optional: stainless steel on aluminium)
Function keys	8

Ambient Conditions

Ambient temperature operation	-20 °C ... +55 °C
Storage temperature	-30 °C ... +60 °C
Temperature note 1	Operating temperature +55 °C for a maximum of 5 h, for constant operation (24/7) +50 °C.
Heat dissipation	about 50% via the front plate and 50% via the enclosure
Relative humidity	90% at +40 °C, without condensation
Damp heat	+55 °C / 95 %
Damp heat cyclic	+55 °C / 90-100 % +20 °C / 80-100 %
Corrosion resistance	ISA-S71.04-1985, severity level G3
Vibration sinus	5 to 13.2 Hz: ±1 mm 13.2 to 100 Hz: ±0.7 g Axis X, Y, Z
Vibration sinus 1	10 Hz, 1 g 450 Hz, 1 g Change cycle 1 oct/min Operating mode 1.2 Axis X, Y, Z

Operating and monitoring systems

Thin Client SERIES 500

Device platform EAGLE

PM MT-556-TX



Ambient Conditions

Vibration broadband random	10 Hz, 0.01 PSD[(m/s ²) ² /Hz] 450 Hz, 0.01 PSD[(m/s ²) ² /Hz] Grms 2.11 Axis X, Y, Z
Shock	20 Shocks 20 g/11 ms
EMC Immunity	According IEC 61000-6-2 (01/2005) and DIN EN 61323-1 (10/2006) for industrial areas
EMC Emission	According IEC 61000-6-4 (02/2011), DIN EN 55011 / CISPR 11 (03/2008) for industrial environments and DIN EN 55022 / CISPR 22 (05/2008) for Class A
Positive pressure operation	< = 20 mbar

Mechanical Data

Dimensions (WxHxD)	535 mm x 425 mm 165 mm
Cut-out (WxH)	522.5 mm x 412.5 mm
Wall thickness	≤ 8 mm
Depth of cut-out	165 mm
Mounting position	vertical or horizontal
Weight	25 kg
Material front	Polyester or stainless steel (on aluminium)
Material back	Stainless steel
Ingress protection	IP66
IP enclosure front	IP66
IP enclosure back	IP66
Fixing frame	yes
Cable gland type	8161 (Ex e)
Cable gland number	6 x M16, 3 x M20
Cable gland thread size	M16 x 1.5 / M20 x 1.5
Cable gland cable diameter range	M16 = 5 ... 9 mm / M20 = 7 ... 13 mm
Cable gland wrench size	M16 = SW 20 / M20 = SW 24
Breather	yes, part of the enclosure and device approval

Mounting / Installation

Mounting option	Panel mount
-----------------	-------------

Components

Keyboard	optional, 105 keys or 107 keys with integrated trackball / joystick
----------	--

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.