

Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

PM IT-667-DVI3-CAT




- KVM system for panel mounting, 22" display, 1680 x 1050
- For installation in safe areas
- Display of the 19" (1280 x 1024) resolution true to 5:4 format
- Optional resistive glass or foil touch screen
- Data transmission via CAT5 copper cable up to 150 m

WebCode **IT667A**

The PM IT-667-DVI3 HMI series includes KVM systems for panel mounting in safe areas. Their brilliant 22" widescreen displays with a resolution of 1680 x 1050 pixels (format 16:10), are available with or without touch screen. Country-specific keyboards, pointer instruments and RFID and barcode scanners are useful accessories making work easier and extending functionality. Data transmission via CAT5 copper cable up to 150 m.

KVM SYSTEMS INTEGRATION

PC WORKSTATIONS

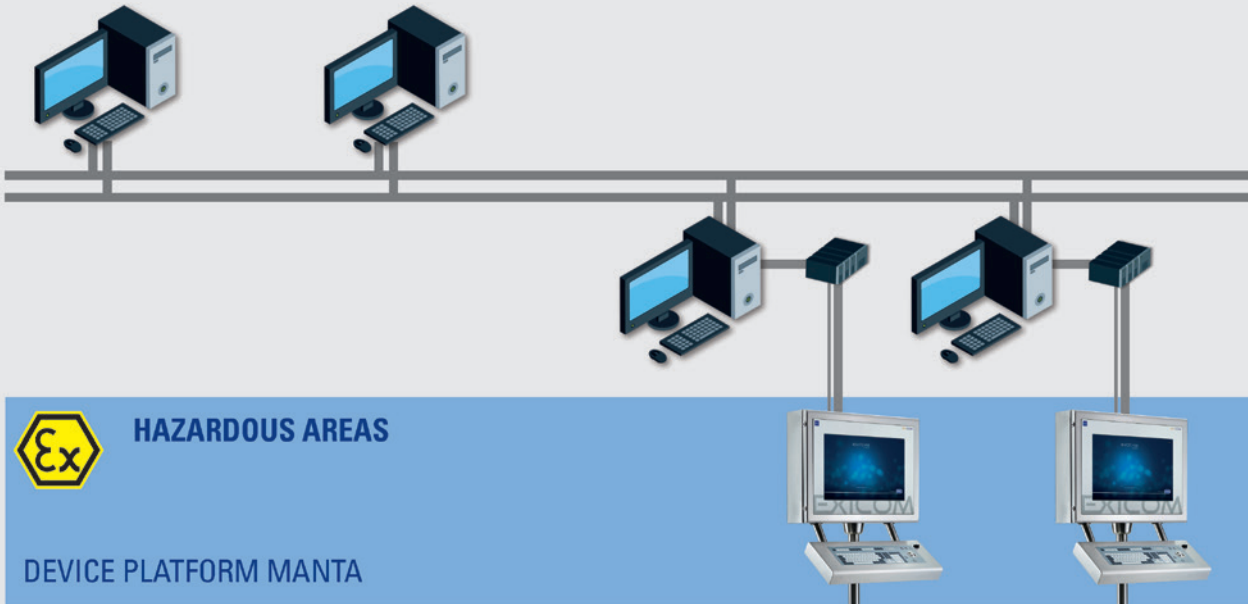

Technical Data

General

Series	Panel mount device PM IT-667 (discontinued)
Product description	22" KVM system

Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

PM IT-667-DVI3-CAT



General

Technology	Remote HMI KVM
HMI type	Panel mount device
WebCode	IT667A

Explosion Protection

Application range (zones)	Non-Ex
---------------------------	--------

Electrical Data

Rated operational voltage DC	24 V
Voltage range DC	20 – 30 V
Rated operational voltage AC	230 V
Voltage range AC	100 – 240 V
Power consumption DC	3 A
Power consumption AC 1	1 A
Protection fuse DC	5 AT
Protection fuse AC	5 AT
Rated operational power	typ. 50 W / 100 W with O30 / max. 150 W (typ. 170 BTU / 341 BTU with O30 / max. 510 BTU)
Transfer technology	KVM-DVI3
Ethernet / Data	CAT5
Data cable	CAT5 installation cable AWG23
Data cable length	max. 150 m
Interface medium	CAT5 data transmission
Frequency range	50 – 60 Hz
Interface USB	2 x USB (Hub) 1 x USB (Root) 2 x USB (Hub) (keyboard, pointing device)
Interface serial	1 x RS-232
Interface audio	1 x Audio Line in / out
WLAN	optional via USB
Connections	via standard plug
Plug version USB	USB-A connector
Max. input voltage U_m	250 VAC

Display

Display version	TFT Colour display
Display version 2	16.7 million colours
Display size inch	22
Display size centimetres	56
Display resolution	WSXGA+
Total pixels	1680 x 1050
Display dimensions	16:10
Display brightness	250 cd/m ²
Display contrast	1000:1
Display viewing angle horizontal	178° at CR ≥5
Display viewing angle vertical	170° at CR ≥5
Display	Glass
Touchscreen	Optional resistive

Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

PM IT-667-DVI3-CAT



Display

Touchscreen technology	5-wire glass or membrane touch
Touchscreen activation	Foil touch: low activation pressure (0.1 up to max. 1 N) Glass touch: medium activation pressure (1.8 up to max. 2.5 N)
Touchscreen input method	Finger, gloved finger or stylus
Touchscreen durability	Foil touch: Polyester foil is easily scratched, with high pressure force the spacer dots could be damaged. Glass touch: Quite good, but with high pressure force the spacer dots could be damaged.
Touch screen scratch hardness MoHS	Foil touch: - Glass touch: >5
Touchscreen scratch hardness pencil test ISO15184	Foil touch: 3H Glass touch: 9H
Touchscreen transmissivity / optic	Foil touch: small milky effect due to the foil Glass touch: very good
Touchscreen surface contaminants	unaffected
Touchscreen abrasive resistance	36 million times with a silicone rubber of R8 finger, hitting rate 250 g at 2 times per second
Backlight	LED Technology
Backlight service life	50 000 h at +20 °C
Front plate (display)	Aluminium

Ambient Conditions

Ambient temperature operation	-20 °C ... +60 °C
Ambient temperature operation 1	-30 °C ... +60 °C with heater version O30
Storage temperature	-30 °C ... +70 °C
Cold start temperature	-10 °C
Temperature note 1	The O30 version is only available for the AC version devices !
Temperature note 2	Operating temperature +60 °C for a maximum of 5 h, for constant operation (24/7) +50 °C.
Temperature note 3	Cold start temperature: If the HMI device is switched on at a temperature below -10 °C the display will need a certain amount of time to warm up until everything is clearly visible. Depending on how low the temperature is, this process may last up to 3 hours.
Heat dissipation	about 40 % via the front plate and 60 % via the enclosure
Relative humidity	10 to 90 % at +40 °C, non-condensing

Mechanical Data

Dimensions (WxHxD)	660 mm x 475 mm x 110 mm
Cut-out (WxH)	615 mm x 435 mm (+/-0.5 mm)
Wall thickness	≤ 5 mm
Depth of cut-out	110 mm
Mounting position	vertical or horizontal
Weight	10 kg
Material front	Aluminium
Material back	Steel
Ingress protection	IP66
IP enclosure front	IP66
IP enclosure back	IP20

Mounting / Installation

Mounting option	Panel mount
-----------------	-------------

Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

PM IT-667-DVI3-CAT



Components

Keyboard	optional, 107 keys with trackball / joystick / mouse / touchpad
----------	---

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.