

## Signalling devices

Audible/visual signalling device Horn/XENON light fitting

In flameproof enclosure

YL60/334-PS101-00YW10-ST000-0000 Art. No. 344425



- The latest generation of audible and visual alarm devices
- Ex d/Ex e connection chambers
- Visual solutions with 5 J XENON and high-power LEDs with various light modes and 4 light channels
- Audible solutions with directional or omnidirectional horn with up to 120 dB(A) at 1 m, 4 tone channels and 64 preconfigured tones
- Four output levels can be configured
- Brackets, fixings and protective grid made from stainless steel
- Fastening bracket and protective cage included

MY R. STAHL YL60C



The **YL60/3 product series** provides audible and visual alarm signals which can be used to alert, warn or draw attention to equipment malfunction/start-up or any number of safety-related issues in hazardous areas. The preconfigured signal tones and light patterns (LED) provide a wide range of internationally standardised signal patterns. The audible and visual signals can be operated separately or in combination, with four channels available for each type of signal, enabling flexible use.

### Technical Data

#### Explosion Protection

|                                 |                                |
|---------------------------------|--------------------------------|
| Area of application             | European Union (ATEX)<br>IECEX |
| Application range (zones)       | 1, 2, 21, 22                   |
| IECEX gas certificate           | IECEX EPS 22.0046 X            |
| IECEX gas explosion protection  | Ex db IIC T4 Gb                |
| IECEX dust certificate          | IECEX EPS 22.0046 X            |
| IECEX dust explosion protection | Ex tb IIIC T100 °C Db          |
| ATEX gas certificate            | EPS 22 ATEX 1 224 X            |
| ATEX gas explosion protection   | ⊕ II 2 G Ex db IIC T4 Gb       |
| ATEX dust certificate           | EPS 22 ATEX 1 224 X            |
| ATEX dust explosion protection  | ⊕ II 2 D Ex tb IIIC T100 °C Db |
| Certificates                    | ATEX (BVIS), IECEX (BVIS)      |
| Declaration of conformity       | ATEX (EUK)                     |

#### Electrical Data

|                              |               |
|------------------------------|---------------|
| AC rated operational voltage | 110 ... 240 V |
| Rated operational voltage DC | 133 ... 272 V |
| Line monitoring              | Yes           |

#### Acoustic Data

|                      |                      |
|----------------------|----------------------|
| Horn version         | omnidirectional      |
| Sound pressure level | max. 114 dB(A) @ 1 m |
| Sound level          | 4                    |
| Volume control       | 18 dB (A) adjustment |

#### Lighting Data

|   |                       |
|---|-----------------------|
| Lamp  | 5 J xenon flash tubes |
| Effective luminous intensity (1 Hz, flashing) | 125 cd                |

# Signalling devices



Audible/visual signalling device Horn/XENON light fitting

In flameproof enclosure

YL60/334-PS101-00YW10-ST000-0000 Art. No. 344425

## Ambient Conditions

|                     |                       |
|---------------------|-----------------------|
| Ambient temperature | -40 °C ... 70 °C (T4) |
| Storage temperature | -60 °C ... 70 °C      |
| Humidity            | 95 %                  |

## Mechanical Data

|   |  |
|---|--|
| IP degree of protection (IEC 60598)       | IP66   |
| Connection chamber version                | Ex d   |
| Enclosure material                        | Aluminium, powder-coated, Seawater-resistant |
| Enclosure colour                          | red, similar to RAL 3020                     |
| Silicone-free content                     | Contains silicone                            |
| Trumpet material                          | PC/PBT                                       |
| Material dome                             | Polycarbonate, prismatic                     |
| Protective collar material                | Polycarbonate (PC cover)                     |
| Wire guard material                       | Stainless steel                              |
| Max. solid connection terminals           | 4 mm <sup>2</sup>                            |
| Max. finely stranded connection terminals | 2.5 mm <sup>2</sup>                          |
| Width                                     | 176 mm                                       |
| Height                                    | 422 mm                                       |
| Length                                    | 128 mm                                       |
| Lens colour                               | Yellow                                       |
| Mounting                                  | L-bracket                                    |
| Weight                                    | 6.56 kg                                      |



## Mounting / Installation

|                        |                 |
|------------------------|-----------------|
| Connection type        | Push in         |
| Mounting part material | Stainless steel |

## Components

|                        |                     |
|------------------------|---------------------|
| Drilled holes          | 2x M20 + 2x 1/2"    |
| Stopping plugs         | 2x M20 + 2x 1/2"    |
| Stopping plug material | Nickel-plated brass |

## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

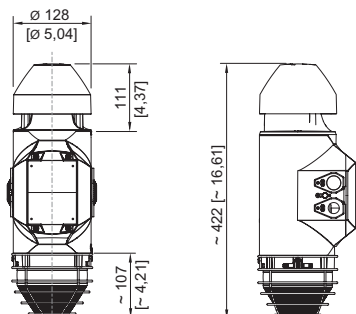

YL60/3 omnidirectional horn

## Signalling devices

Audible/visual signalling device Horn/XENON light fitting

In flameproof enclosure

YL60/334-PS101-00YW10-ST000-0000 Art. No. 344425

STAHL

### Accessories

#### Metal cable gland

#### Art. No.

|  |  |        |
|--|--|--------|
|  | Ex d and Ex e cable gland with compound for all types of armoured cables (SWA, wire-braid, tape) (nickel-plated brass)<br>Type 20PX2K, M20 x 1.5                               | 109428 |
|  | Ex d and Ex e cable glands with RapidEx sealing system for all types of unarmoured cables and wire-braid-armoured cables (nickel-plated brass)<br>Type 20PX2K-REX, M20 x 1.5   | 246649 |
|  | Ex d and Ex e cable glands with compound for all types of unarmoured cables and wire-braid-armoured cables (nickel-plated brass)<br>Type 20PXSS2K, M20 x 1.5                   | 109441 |
|  | Ex d and Ex e cable glands with RapidEx sealing system for all types of unarmoured cables and wire-braid-armoured cables (nickel-plated brass)<br>Type 20PXSS2K-REX, M20 x 1.5 | 246605 |

#### Plastic cable gland

#### Art. No.

|  |   |        |
|--|---|--------|
|  | 8161/7-M20-1304, Ex e<br>Polyamide, M20 x 1,5 mm, 4 – 13 mm<br>Lot size 50 pieces | 239156 |
|--|---|--------|

#### Stopping plug

#### Art. No.

|  |   |        |
|--|---|--------|
|  | 8290/3-M20<br>Plastic, M20 x 1.5<br>Lot size 1 piece    | 143522 |
|  | 8290/3-M20<br>Plastic, M20 x 1.5<br>Lot size 100 pieces | 285773 |

### Spare Parts

#### Mounting accessories

#### Art. No.

|  |                                   |        |
|--|-----------------------------------|--------|
|  | L-bracket, stainless steel 1.4404 | 319271 |
|  | U-bracket, stainless steel 1.4404 | 319280 |

#### Protective cage

#### Art. No.

|  |   |        |
|--|---|--------|
|  | Protective cage, stainless steel 1.4404 | 319272 |
|--|---|--------|

## Signalling devices


Audible/visual signalling device Horn/XENON light fitting

In flameproof enclosure


YL60/334-PS101-00YW10-ST000-0000 Art. No. 344425




### Textured lens

|  |                         | Art. No. |
|--|-------------------------|----------|
|  | yellow (YL60/3, FL60/3) | 319279   |

### Lamp

|  |                         | Art. No. |
|--|-------------------------|----------|
|  | Xenon tube PCB 5 joules | 319281   |

### Shaped horn

|  |                             | Art. No. |
|--|-----------------------------|----------|
|  | omnidirectional, repair kit | 319250   |

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.